



PRODUCT CATALOG SWITCHES & SENSORS

➤ WWW.MARQUARDT-SWITCHES.COM
















MARQUARDT

















APPROVAL MARKS

| | | | |
|--|--------------|---|--------------------|
|  | ENEC |  | VDE |
|  | UL (USA) |  | UL (USA + Canada) |
|  | CSA (Canada) |  | CSA (Canada + USA) |

TERMINAL SYMBOLS

| | | | |
|---|---------------------------|---|------------------|
|  | Quick-connect terminal |  | Cable |
|  | Solder terminal |  | Terminal strip |
|  | Short solder terminal |  | Push-in terminal |
|  | PCB terminal |  | Snap-in terminal |
|  | PCB terminal angled left |  | Cut terminal |
|  | PCB terminal angled right |  | Screw terminal |
|  | Socket terminal | | |

ACTUATOR SYMBOLS

| | | | |
|--|------------------------------|---|---|
|  | Straight lever |  | Lever simulated roller with adjusting screw |
|  | Lever simulated roller |  | Lever with adjusting screw and roller |
|  | Lever with roller |  | Lever with cams |
|  | Differential lever |  | Housing cams |
|  | Spring lever |  | Pushbutton |
|  | Spring lever bent |  | Rotary shaft |
|  | Spring lever with molded cam |  | Standard actuator |
|  | Lever with adjusting screw |  | Mushroom-shaped actuator |

ABBREVIATIONS TECHNICAL DRAWING

| | | | |
|------------------|---------------------------------------|--------------|---|
| ad | Adjustable | OP | Operating position |
| AN | Anode | OP NC | Operating positions normally closed contact |
| BL | Block | OP NO | Operating positions normally open contact |
| FH | Fixing hole, locating hole fixing pin | OR | On request |
| FI | Fields for function indicator | RC | Recommended cut-out |
| FP | Free position | RL | Reference level |
| FX | Fixing pin | SH | Shap-in hole |
| ju | Adjusted | SL | Symbol limit |
| MC | Marking cathode | SP | Solder pads |
| MF | Mounting frame | ST | Slide travel |
| MP | Measuring point | SW | Switching position |
| OFF | Off | TH | Terminal hole |
| off-range | Zero position | tk | Thick |
| OG | Operating range | to | Top |
| ON | On | TP | Permissible total travel position |

SWITCHING FREQUENCY (ABBREVIATIONS)

e. g. **5E4** switching cycles \approx **50 000** switching cycles





MARQUARDT

| | |
|---|---|
| Because cutting-edge technology is based on knowledge and ingenuity | 2 |
| Because product variety allows tailor-made designs | 3 |

TECHNICAL INFORMATION

| | |
|---|-----------|
| General technical information | 4 |
| About the catalog | 4 |
| Code of Conduct | 4 |
| Approvals | 4 |
| Approval marks | 4 |
| CE mark / Declaration of installation | 5 |
| RoHS (Restriction of the Use of Certain Hazardous Substances) | 5 |
| REACH (EG/1907/2006) | 5 |
| Household Appliances Standard IEC/EN 60335 | 5 |
| Rating for alternating current voltage (AC) | 5 |
| Rating for direct current voltage (DC) | 5 |
| Life endurance | 5 |
| Gold-plated contacts | 6 |
| Switching frequency | 6 |
| Contact distance | 6 |
| Proof tracking | 6 |
| Inrush current | 6 |
| Ambient temperature | 6 |
| Ambient conditions | 6 |
| Isolation characteristics | 7 |
| Storage conditions | 7 |
| Soldering conditions | 7 |
| IP protection | 8 |
| EMC (electromagnetic compatibility) | 8 |
| Appliance safety law | 8 |
| Terminal symbols | 8 |
| Contact resistance | 8 |
| Switching functions | 9 |
| Special information about snap-action switches | 10 |
| Switching reliability | 10 |
| Bounce time | 10 |
| Switching time / switching travel | 10 |
| Operating force-travel diagram | 10 |
| Contact force-travel diagram | 10 |
| Positions-forces-travels | 10 |
| Further information | 11 |
| Order numbers | 11 |
| Customized solutions | 11 |
| Stock versions / minimum order quantities | 11 |
| Modifications / catalog data | 11 |
| Application note / liability | 11 |

SWITCHES AND SENSORS

| | |
|--|-----------|
| Switches and sensors tab overview | 13 |
| Rocker switches | 15 |
| Series 1900 - Smallest single-pole rocker switches | 18 |
| Series 1800 - Single and double-pole rocker switches | 21 |
| Series 1890 - Single-pole rocker switches illuminated with LED | 36 |
| Series 1881 - Single-pole round rocker switches | 38 |
| Series 1855 - Miniature double-pole rocker switches | 42 |
| Series 1858 - Miniature double-pole rocker switches | 45 |
| Series 1941 - Single-pole rocker switches IP 50 | 48 |
| Series 1550 - Single and double-pole rocker switches | 50 |
| Series 1830 - Single and double-pole rocker switches | 56 |
| Series 1930 - Double-pole rocker switches IP 65 | 70 |
| Series 1656 - Single-pole rocker switches | 75 |
| Series 3230 - Single and double-pole rocker switches | 77 |
| Series 3250 - Single and double-pole rocker switches IP 66/IP 68 | 83 |
| Series 0344 - Three-pole rocker switches | 94 |

| | |
|--|------------|
| Pushbutton switches | 95 |
| Series 1680 - Single and double-pole pushbutton switches | 98 |
| Series 1683 - Single and double-pole pushbutton switches | 105 |
| Series 1691 - Smallest single-pole pushbutton switches | 109 |
| Series 1247 - Double-pole pushbutton switches | 110 |
| Series 5000 - Round pushbutton switches | 112 |
| Series 1846 - Single-pole pushbutton switches | 114 |
| Series 1840 - Single and double-pole pushbutton switches | 116 |
| Series 1660 - Single and double-pole pushbutton switches | 120 |
| Series 1670 - Single and double-pole pushbutton switches | 124 |
| Toggle Switches | 129 |
| Series 0350 - Three-pole toggle switches | 131 |
| Series 1810 - Single and double-pole toggle switches | 132 |
| Series 1820 - Single and double-pole toggle switches | 135 |
| Series 0100 - Single-pole toggle switches | 139 |
| Slide Switches | 141 |
| Series 4021 - Double and four-pole slide switches | 143 |
| Series 1206 - Single-pole slide switches | 147 |
| Rotary switches | 149 |
| Series 1703 - Powerful rotary switches | 151 |
| Foot switches | 153 |
| Series 2410 - Ergonomic foot switches | 155 |
| Series 2420 - IP 65 / 67 protected foot switch | 158 |
| Tact and key switches | 161 |
| Series 3006 - Tact switches | 163 |
| Series 6425 - Key switches | 165 |
| Series 6450 - Key switches | 171 |
| Series 3000 - Key switches | 173 |
| Snap-action switches | 175 |
| Series 1055 - Subminiature snap-action switches IP 67 | 178 |
| Series 1050 - Subminiature snap-action switches | 183 |
| Series 1045 - Subminiature snap-action switch IP 67 | 189 |
| Series 1080 - Miniature snap-action switches | 197 |
| Series 1005 - Miniature snap-action switches | 201 |
| Series 1040 - Rotary shaft snap-action switches | 209 |
| Series 1010 - Open snap-action switches | 211 |
| Series 1019 - Single-pole snap-action switches | 215 |
| Series 1022 - Snap-action switches IP 67 | 218 |
| Series 1117 - Snap-action switches | 220 |
| Series 1115 - Single-pole pushbutton switches | 222 |
| Micro-signal switches | 225 |
| Series 1065 - Micro-signal switches | 227 |
| Sensors | 233 |
| Series 2061 - Flow sensors | 235 |
| Series 2066 - Analogue pressure sensors | 237 |
| ECO | 241 |
| Series 1550 ECO - Single-pole rocker switches | 243 |
| Series 1086 ECO - Single-pole pushbutton switches | 246 |
| Push'n'Drive | 249 |
| Series 3450 - Push'n'Drive Keyless-Go-System | 251 |

INDEX

| | |
|------------------------------|------------|
| Index of part numbers | 253 |
| Part numbers | 253 |
| Lamps | 256 |
| Accessories | 257 |
| Notes | 260 |

ROCKER SWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SNAP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH'N'DRIVE

BECAUSE CUTTING-EDGE TECHNOLOGY IS BASED ON KNOWLEDGE AND INGENUITY.

The Marquardt Group was established in 1925 and, in spite of becoming a Global Player, has remained an independent family enterprise. With its two business units – Automotive and Switches, Sensors & Controls, the Marquardt Group with its 12 international locations, is present world-wide in all important markets with more than 6,000 employees in all.

Every year, we invest more than seven percent of our turnover in research and development – not to mention the use of modern development tools, simultaneous engineering and an efficient testing system. Moreover, our corporate culture offers ample scope for unfolding the inventive genius of our employees. As a result, new ideas come up time and again, which are materialized into marketable cutting-edge technologies.

The Switches, Sensors & Controls division develops, produces and sells its products in a number of industries and applications. Apart from industrial applications, our products are used in power tools, household appliances, cleaning systems, drive technology, heating and air-conditioning technology as well as Off-Road vehicles. We have the necessary technical knowhow, innovative strength, long-term experience and comprehensive manufacturing expertise required in these fields.

This yields innovative and reliable products that feature promising designs tuned to individual requirements. Our products range from the standard switch to complex customer-specific systems. They are suitable for small-scale and large-scale production. With distinct production engineering, worldwide manufacturing options, high quality standards and durability of our products, we achieve customer satisfaction and thereby ensure our competitive ability.

These customer- and market-specific solutions have made Marquardt a strong partner of the power tool and electrical industry as well as a technology leader. We are at your service in all the international markets.

Marquardt standard switches are used in a wide range of industrial and electrical applications. Factors such as reliability, safety, design, innovative solutions and cost-efficiency are of utmost importance.

Marquardt offers a very broad and technically sophisticated product portfolio based on many years of experience. Our standard switches are longlasting and preferred because of their high performance. For us, demanding customer requirements are a welcome challenge.

You can order various switches by selecting them directly from our up-to-date online product catalog. Whether mains or signal voltage, manual or mechanical actuation, with or without lighting – we help you to find the right solution.



BECAUSE PRODUCT VARIETY ALLOWS TAILOR-MADE DESIGNS.

MARQUARDT SWITCHES AND SENSORS – FOR A WIDE RANGE OF APPLICATIONS



Medical and laboratory technology



Office communication



Industrial applications



Small household appliances



Large household appliances



Cleaning & drive applications



Building technology



Heating-, ventilation- and air conditioning technology



Power tools



Construction and agricultural machinery



Leisure vehicles



Automobiles

Find out more at www.marquardt.com

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH-IN DRIVE



ABOUT THE CATALOG

This catalog provides an overview of the wide range of Marquardt standard switches. The portfolio includes rocker switches, pushbutton switches, toggle switches, slide switches, rotary switches, foot switches, power tool switches, key switches, snap-action switches, micro-signal switches and sensors.

Basic types are distinguished within a series to group products with identical properties, e.g. the size.

The technical data and specifications are typical characteristics which can vary depending on the product.

In addition to the standard program, a number of modified, customized variants and special products and modules are available on request.

All standard versions are listed with their order numbers.

- The order numbers of other versions and further information are available on request.
- Sample switches, approvals and installation drawings with tolerance data can be provided.

The high quality and durable switches from Marquardt are used in many different applications. We are constantly working on new developments and customized versions. Please ask for further information.

The current Marquardt product program can be found in our online product catalog with filter functionality at www.marquardt-switches.com

All the products in our entire delivery program have one common feature: The consistently high quality level which has made us the favorite supplier of leading manufacturers worldwide. We are certified according to the most up to date automotive quality norm ISO TS 16949:2002 as well as the ISO 9001 naturally. The ISO 9001 is integral part of the ISO TS 16949. The latest valid documents for it are downloadable from our webpage. Quality is a premium for us.







CODE OF CONDUCT

The self declared Code of Conduct is very important for Marquardt. It describes the basic rules of the ethical and legal behavior among each other, but also with business partners, public authorities and other third parties. Please contact us for more details.

APPROVALS

Almost all Marquardt switches have been tested in accordance with EN 61058-1 or IEC 61058-1 and designed for the application conditions specified therein unless specified otherwise. They carry the uniform European approval mark ENEC. The approvals for the USA and Canada are granted in accordance with UL 1054, on request also already in accordance with UL 61058 3rd ed. or CSA 61058. In the year 2015 all approvals according UL 1054 und CSA 22.2 No. 55 expire and will be replaced by the UL 61058. Marquardt started with the conversion and re-evaluation for a smooth process for our customers already. The end device approval requirements for the target market China changed by middle of 2010. Switches must not be CCC certified generally, but the freely CQC approval simplifies the end device approval. CQC approvals are available for some standard switches. Please contact us for more details and support. Please see the catalog for the respective granted approvals. A list of the approved Marquardt products can be found on the web pages of the respective test bodies (e.g. VDE, KEMA, UL and CSA). We will provide the appropriate certificate on request.

APPROVAL MARKS

| | | | |
|---|--------|---|---|
|  | ENEC | – | Europe |
|  | VDE | – | Germany |
|  | UL | – | USA |
|  | CSA | – | Canada |
|  | cCSAus | – | Canada with confirmation of the national US requirements |
|  | cULus | – | USA with confirmation of the national Canadian requirements |
| | CQC | – | freely Chinese approval mark |

Approval marks specified in the series overview are product-dependent. That means that the products are assignable in the tables based on the rating specifications (black print – Europe/ blue print – North America).

The exact assignment of the approval marks are specified on the customer drawing for each product. The drawings are available as download from the online product catalog at www.marquardt-switches.com



GENERAL TECHNICAL INFORMATION

CE MARK / DECLARATION OF INSTALLATION

The CE mark is an identification according to EU law for certain products with regard to the product safety. It is not a seal of quality (quality mark). By attaching the CE mark, the manufacturer confirms that the product complies with valid European regulations. The CE mark does not mean that the product has been checked for compliance with regulations by an independent body.

Following revisions of the EU regulations in 2007 some of our switches have no labeling obligation, some are subject to the low voltage directive and some are subject to the machine directive. The CE mark and the issuing of the declaration of conformity depend on the respective situation.

A CE mark is not prescribed for the components but for the smallest packing unit.

ROHS (RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES)

From July 1, 2006 no more new electrical and electronic products may be offered in the EU which do not comply with the RoHS directive. The use of lead, mercury, hexavalent chromium, cadmium and the flame inhibitors containing bromide PBB and PBDE is prohibited for the protection of man and the environment.

Compliance with the legal regulations is a matter of principle for Marquardt.

This means all necessary measures for the implementation of the RoHS guideline have been done already, including suppliers. In our products are no forbidden materials included restricted by RoHS (lead, cadmium, chrome (VI), mercury and polybrominated flame retardant) anymore. The exception is the integrated printed circuit board (PCB) of the product series 3230.

As far as we know and based on the information available to us from our suppliers, the products presented in this catalog meet the requirements of the EU Directive 2011/65/EU (Edition 1.7.2011).

REACH (EG/1907/2006)

REACH stands for Registration, Evaluation, Authorization and Restriction of Chemicals.

Marquardt is anxious to develop and produce all products in compliance with applicable regulations, including the REACH regulations. Please contact us for more information.

HOUSEHOLD APPLIANCES STANDARD IEC/EN 60335

Various switches in the Marquardt product portfolio are conform with the Household Appliance Standard IEC/EN 60335-1:2001/2002, chapter 30. These switches are identified by a "G" in the specification or drawing and on the label of the smallest packing unit. Materials are used here which comply with the values for the glow-wire-flammability index (GWFI) and the glow-wire-ignition-temperature (GWIT) demanded by the standard. The appropriate switches are labeled in the catalog in the product tables of the individual series. The appropriate certificate with the confirmation of conformity is available on request.

RATING FOR ALTERNATING CURRENT VOLTAGE (AC)

The electrical reference values, i.e. the maximum permissible electrical loads in continuous operation, are specified for the respective switch series. Most Marquardt switches are suitable for ohmic resistance load and motor load.

In the specification of the reference power using the bracket notation, e.g. 16 (4) A 250 V AC, the value in front of the brackets indicates the switch-off current and the value in brackets the nominal motor current. In switches which are additionally approved by test bodies in the USA (UL) and Canada (CSA) the corresponding ratings according to North American standards are listed additionally in blue. The motor loads may also be shown as HP (Horse Power) values according to North American conventions.

RATING FOR DIRECT CURRENT VOLTAGE (DC)

Since the range of DC loads is very wide and extensive and also depends very greatly on the application, no DC values are specified for the majority of the series in this catalog. Explicit tests are recommended for this. Tests which have already been carried out are available on request and the results can be used as references. As a rule of thumb it can be assumed at low currents that the specified alternating current values (AC) correspond to the direct current values when the life is reduced to about one third. In series with DC voltage specifications the specified current always refers to an ohmic load. If inductive or capacitive loads are available, the application must be checked by tests with the original load.

LIFE ENDURANCE

The mechanical life endurance is the number of possible switching cycles without electrical loading of the contacts whilst the electrical life endurance is determined with the permissible rated electrical power for the contacts. The lower the electrical load is, the closer the electrical life is to the mechanical life when using the switch in the appliance.



GOLD-PLATED CONTACTS

For applications with a rating of < 300 mW or < 12 V we recommend switches with gold-plated contacts, also for applications with rare actuation or in a sulfurous atmosphere or other corrosive environments. Minimum currents are not especially defined, but can be assumed in a range down to 1 mA.

SWITCHING FREQUENCY

For switches which are expected to be actuated more than 2 000 times a year, the test bodies prescribe an electrical life endurance of > 50 000 switching cycles. The majority of our switches meets these requirements and is marked by the 5E4 symbol (50 000 switching cycles) as an additional specification in the rating data. Switches without specification of the switching cycles in the rating data are approved for a switching frequency of 10 000 cycles. These data refer to the load which is typical for and described in the IEC 61058-1 standard. For clear differing, e.g. slower or faster actuations, we will be glad to advise you!

CONTACT DISTANCE

The majority of our appliance switches and some of our snap-action switches have a contact distance which enables full disconnection from the mains. The opening distances are even more than 3 mm in most cases. Switches which are not suitable for full disconnection are marked with the μ symbol.

The switch standard IEC 61058-1 demands a contact distance of > 1.5 mm, the Household Appliances Standard EN60335 < 3 mm depending on the application for full mains disconnection. In switch variants with < 3 mm the test bodies usually acknowledge the mains plug or a disconnection device in the installation as a disconnection from the mains. Ask your test body if in doubt.

PROOF TRACKING

The proof tracking (PTI/CTI value) indicates at what voltage the proof tracking test is passed. The tracking distance is the shortest distance along the surface of the insulating material between two conductive parts. The values specified in the catalogue correspond to the division according to EN 61058-1 or IEC 61058-1.

INRUSH CURRENT

Short capacitive peak currents mainly occur when switching devices with power supply units (e.g. computers, printers, fax machines, etc.). The duration of these currents is typically < 10 ms. The test conditions with a special test circuit are defined in EN 61058-1 or IEC 61058-1.

Values of the possible capacitive inrush currents are available for most of our appliance switches. They are labeled with the specification of the continuous current and the maximum inrush current as well as the voltage, e.g. 5/100 A 250 V AC.

Guideline for the inductive inrush current is 6 times of the specified motor current described in brackets (e.g. 24 A at 12(4) A). Please contact us in case of doubt.

AMBIENT TEMPERATURE

The designation of the permissible ambient temperature with e.g. T 85 means that the switch can be used for a maximum ambient temperature of 85 °C according to the test criteria of the European safety standards (EN 61058 or IEC 61058-1). The identification T85/55 indicates that the terminal side of the switch is suitable for an ambient temperature of 85 °C, whilst the actuating part (e.g. rocker) is subject to the room temperature of 55 °C demanded by the standard. Using the switches outside the permissible temperature range and in a very humid or corrosive atmosphere can impair the functional capability.

For UL-approved switches, the ambient temperature is determined by the RTI (Relative Temperature Index) of the used materials. Generally, the permissible ambient temperature of polyamides is 65 °C. Switches for higher ambient temperatures are available on request.

AMBIENT CONDITIONS

The ambient conditions must be considered for the individual application completely. For our switch the use of vapors, glue, silicon etc. should be avoided, because it can change the contact resistance negatively. Aggressive liquids, salts and strong durable UV light can influence or damage the surfaces.



ISOLATION CHARACTERISTICS

Devices have to be developed and constructed in a way that they work safely for conventional use. To work in a safe way an adequate isolation is needed in order to protect against the danger of current.

The measurements of this insulation is based on a protection target which also has an adequate protection against electric shocks even if there is an facile fault. This includes a protection against direct and indirect contact.

This target can be achieved

- by so called "Basis Insulation" and the connection of all metal parts, which can have dangerous touch voltage in case of failure, with the protective conductor of the passed conduct, of the building installation like they are made in appliances with protection class I.
- by Basis Insulation and additional insulation (double insulation) in appliances with protection class II
- Enforced insulation likewise in appliances with protection class II

Most Marquardt switches are constructed for appliances with protection class II, which means that they can be used without additional safety measures for all other appliances independent from protection class (cf. DIN en 61058-1, Kap. 7.1.5.3.4 annotation). If there are deviant characteristics they are observed in the specification.

The necessary testing voltage to appoint the electric strength in regard of the over voltage category II and a pollution degree II is defined in IEC 60664.

- Basis Insulation 1500 V
- Additional Insulation 1500 V
- Enforced Insulation 3000 V

This means that the switches are tested and is proven that they are able to allow an adequate protection.

Please consider the allowance for the current appliance standards of the application which include different allowances unlike this general rules.

STORAGE CONDITIONS

The delivered products must be stored in the original Marquardt packaging in a temperature range between 5 and 45 °C and 30 to 75 % relative humidity. The storage time of 12 months may not be exceeded. Storage in different containers and different climates may impair the properties of the product.

Products with solder terminals can be stored under the following conditions:

- Temperatures between 5 °C and 40 °C
- Mean relative humidity below 50 % (relative humidity max. 85 %)
- No condensation and sulfurous environments

We recommend to check the processing results of the solder terminals in case of different storage conditions or when exceeding a storage time of more than 6 months.

SOLDERING CONDITIONS

1. Recommended handling instructions for lead-free hand soldering

The basis for the solderability of the products in this catalog in the as-delivered state is DIN IEC 60068-2-20.

We recommend:

| | |
|--------------------|--|
| Soldering devices | electronically controlled soldering station with the typical power consumption of 50 - 80 VA |
| Solder | flux-filled solder wire, flux type 1.2.2 |
| Solder temperature | 350 °C ±10 °C (setting on the appliance) |
| Soldering time | 2 to 3 s |

Notes:

No force may be applied to the switch terminals during soldering, otherwise the switch properties (operating position etc.) could be changed. Longer soldering times and multiple soldering can impair the mechanical properties of the solder point and adjacent areas.

When using flux, make sure that no flux gets inside the switch via the terminals. In such cases, the switch may not be soldered "upside down", i.e. with the terminals on top.

In open switching systems the soldering fumes must be kept away from the switch by suitable means.



GENERAL TECHNICAL INFORMATION

2. Recommended handling instructions for lead-free wave soldering

Soldering profiles are published in DIN IEC 61760 which must be adapted to the respective modules and the production conditions.


Typical and maximum values:

Pre-heating duration 80 s typical at 110 °C, max. 125 °C

Wave soldering duration 2 - 7 s at 235 °C, Tmax. 245 °C

Gradient pre-heating max. 2 °C/s

Gradient cooling max. -4 °C/s

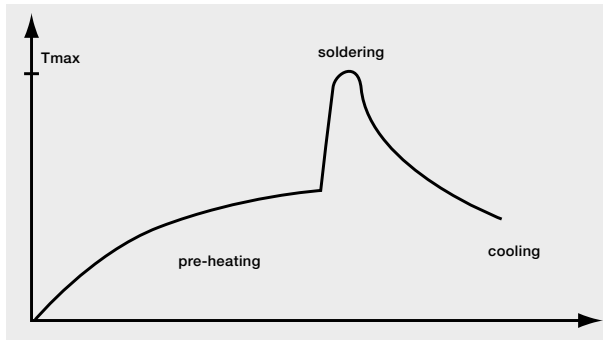

These notes are guidelines which must be adapted respectively to the concrete process.

IP PROTECTION

The IP protection according to DIN EN 61058-1 and IEC 60529 specified in our documents refers to the actuating side of the switch unless stated otherwise. The customer must provide the seal between the switch and customer appliance and test for leaks at this point.














EMC (ELECTROMAGNETIC COMPATIBILITY)

Marquardt switches for use in appliances meet the requirements for interference emissions in accordance with EN 61058-1 when they are used according to our specifications. Requirements for interference suppression in the appliances can be found in the appliance or EMC specifications.

APPLIANCE SAFETY LAW

If you need to observe the valid German appliance safety law, we recommend to use switches which have been tested and approved according to the specifications EN 61058-1 or VDE 0630. Switches without approval marks must be tested by the approval body in connection with your appliance.

TERMINAL SYMBOLS


-  Quick-connect terminal
-  Solder terminal
-  Short solder terminal
-  PCB terminal
-  PCB terminal angled to left
-  PCB terminal angled to right
-  Socket terminal
-  Cable
-  Terminal strip
-  Push-in terminal
-  Snap-in terminal
-  Cut terminal
-  Screw terminal

CONTACT RESISTANCE


The contact resistance is the electrical resistance which can be measured at the switch terminals with closed contacts. The data refers to unwired contacts in new condition with a typical measuring current of greater than 100 mA. For silver-based contact materials this value is below 100 mΩ (measuring current 1 A at 12 V DC), for gold-based contact materials below 50 mΩ.




SWITCHING FUNCTIONS

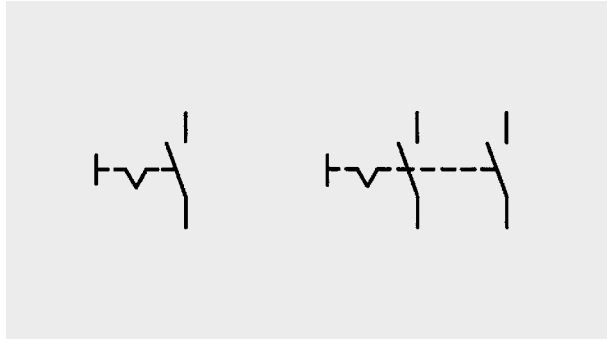


ON/OFF switch
(SPST, DPST)

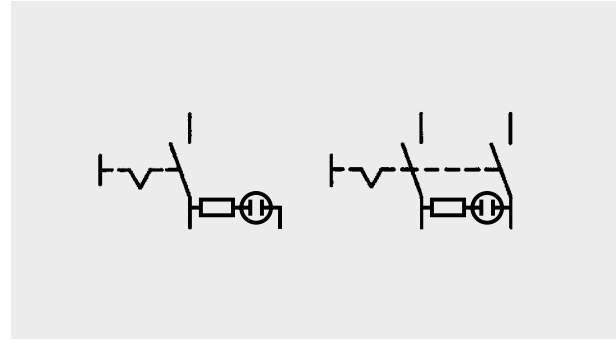


ON/OFF switch with signal lamp
(SPST-Illuminated, DPST-Illuminated)

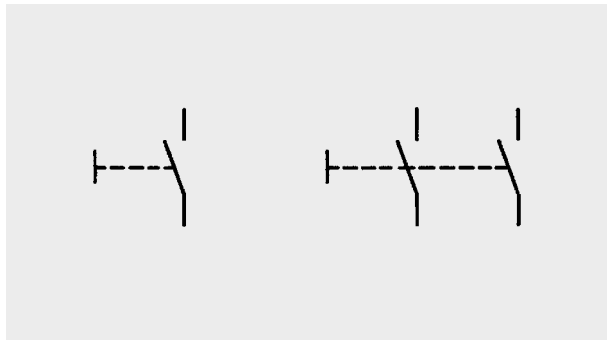


Normally open contact / pushbutton
(SPNO, DPNO)

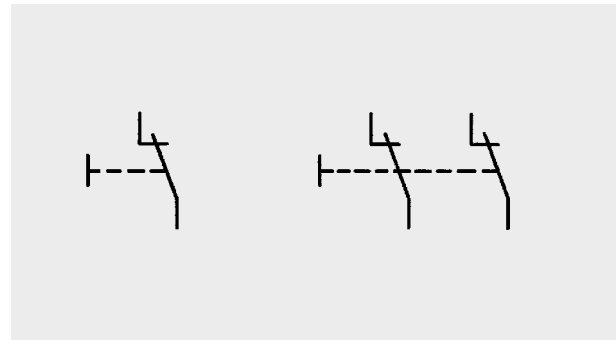


Normally closed contact / pushbutton
(SPNC, DPNC)

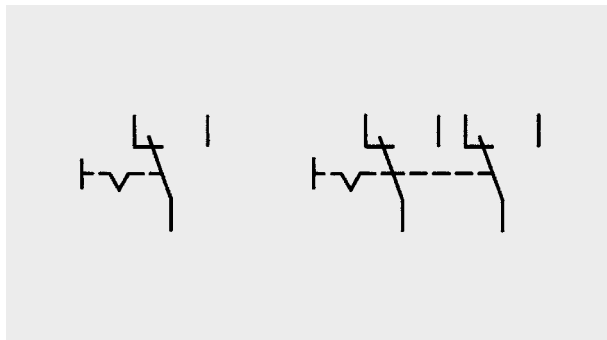


Changeover switch
(SPDT, DPDT)

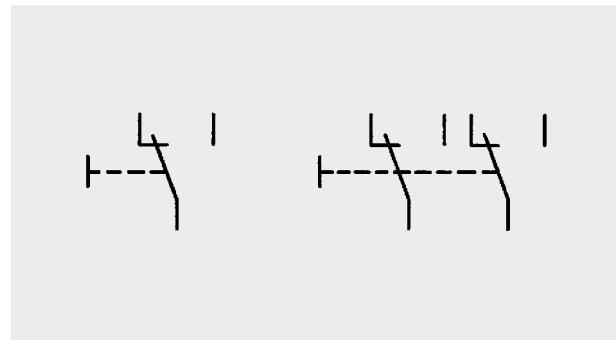

Changeover switch / pushbutton
(SPDT momentary, DPDT momentary)

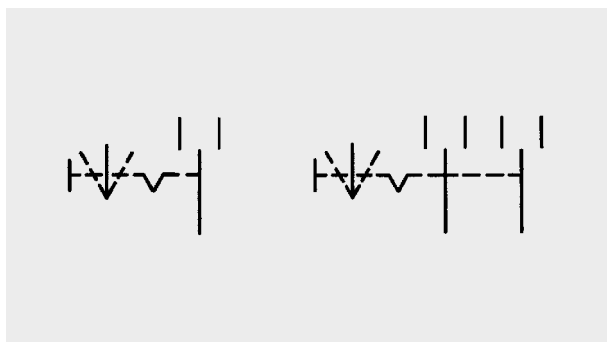

Changeover switch with OFF position in center
(SPDT-Center OFF, DPDT-Center OFF)

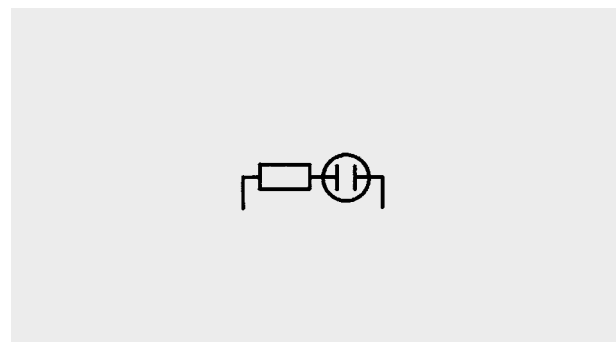

Lamp

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH-IN DRIVE



SPECIAL INFORMATION ABOUT SNAP-ACTION SWITCHES

SWITCHING RELIABILITY

Best switching reliability is achieved with fully exploited pretravel and overtravel so that these should be fully exploited in the concrete application. Another criterion is the contact force which depends on the operating force. Switches with high contact forces should be chosen if possible.


BOUNCE TIME

The bounce time is the time between the first closing of the contacts (switch-on signal) and the last time the contact resistance drops below a given threshold value. The values are typically below 5 ms at typical actuation speeds of approximately 80 mm/s.


SWITCHING TIME / SWITCHING TRAVEL

Switching time/travel is the time or distance which the switching system requires to get from the first opening of the previously closed contacts to the first flow of current through the contacts closed after the snap-action. The respective operating position or release position must be exceeded reliably. Please ask about applications with very slow actuating speeds or applications in which the actuation of the switch is controlled by its switching process.

OPERATING FORCE-TRAVEL DIAGRAM

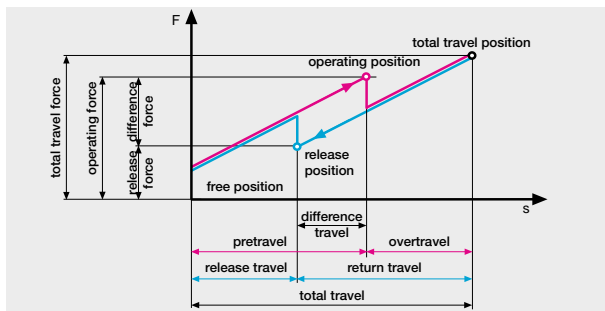

CONTACT FORCE-TRAVEL DIAGRAM

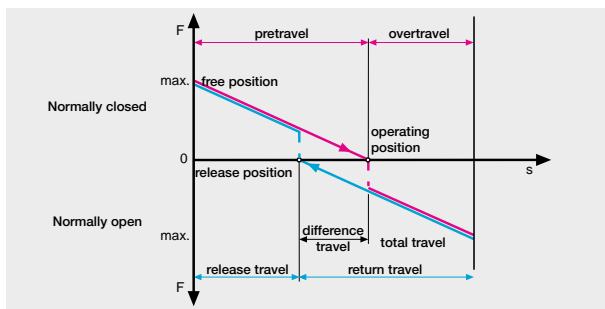

POSITIONS-FORCES-TRAVELS

Free position Position of the actuator in which no external force is applied.

Operating position Point on the actuator travel at which the snap mechanism is irreversibly set in operation.

Total travel position Position of the actuator at the end of the permissible travel.

Release position Point on the actuator travel at which the snap mechanism returns to its initial position.

Operating force Force necessary on the actuator to move this from the free position over the operating position.

Release force Force to which the operating force must be reduced for the snap mechanism to return to the initial position.

Difference force Difference between operating force and release force.

Total travel force Force necessary to keep the actuator in the permissible total travel position.

Pretravel Distance between free position and operating position.

Overtravel Distance between operating position and total travel position.

Return travel Distance between total travel position and release position.

Release travel Distance between release position and free position.

Difference travel Distance between operating position and release position.

Total travel Total of pretravel and overtravel or return and release travel.

The application conditions must be checked in advance for continuously actuated snap-action switches.



ORDER NUMBERS

The standard products in every series are shown in a table form with their most important technical characteristics and their 8-digit order numbers. The accessories have a 9-digit order number.

CUSTOMIZED SOLUTIONS

The series and products shown in this catalog are only an excerpt from the complete Marquardt product range. One of Marquardt's strengths is the implementation of customer-specific requirements. This includes services such as cable assembly, extended or modified functions, other colors, labelings and designs as well as the integration into complete modules and systems. The possibilities "on request" stated in the series must be examined individually. We offer you worldwide contacts for these services.

STOCK VERSIONS / MINIMUM ORDER QUANTITIES

Many of our standard switches are usually available immediately ex-stock in quantities of at least one packing unit (PU). These versions are marked accordingly as a stock version in the tables of the individual series. Please ask about delivery times for the unmarked versions. For the non marked products a minimum order quantity is required. Delivery time is on request. Smaller quantities should be inquired at our distributors.

A list of all switches can be found on page 253. The stock versions are marked by a dot and the respective packing unit (PU) is also listed.

MODIFICATIONS / CATALOG DATA

We reserve the right to make technical modifications and improvements to our products. Data in the catalog (e.g. dimensions, photos, diagrams) are not binding. Specifications, samples and installation drawings with tolerance data will gladly be provided on request.

APPLICATION NOTE / LIABILITY

Since all the data in this catalog refers exclusively to the products delivered by us, you must check whether our products are suitable for your intended application yourselves. We will be glad to help you with advice and information.

Our liability is governed exclusively by our Terms of Delivery and Payment which we will gladly send to you on request.

ORDER DAY AND NIGHT

In our web shop you can order more than
200 standard switches independent of time
and place:
24 hours per day, 7 days per week.

➤ www.marquardt-shop.com





SWITCHES AND SENSORS TAB OVERVIEW

| | |
|-----------------------|--|
| ROCKER SWITCHES | |
| PUSHBUTTON SWITCHES | |
| TOGGLE SWITCHES | |
| SLIDE SWITCHES | |
| ROTARY SWITCHES | |
| FOOT SWITCHES | |
| TACT AND KEY SWITCHES | |
| SNAP-ACTION SWITCHES | |
| MICRO-SIGNAL SWITCHES | |
| SENSORS | |
| ECO | |
| PUSH'N'DRIVE | |

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE

ORDER DAY AND NIGHT

In our web shop you can order more than
200 standard switches independent of time
and place:
24 hours per day, 7 days per week.

➤ www.marquardt-shop.com





ROCKER SWITCHES

| | |
|-----------------------|---|
| ROCKER SWITCHES |  |
| PUSHBUTTON SWITCHES |  |
| TOGGLE SWITCHES |  |
| SLIDE SWITCHES |  |
| ROTARY SWITCHES |  |
| FOOT SWITCHES |  |
| TACT AND KEY SWITCHES |  |
| SNAP-ACTION SWITCHES |  |
| MICRO-SIGNAL SWITCHES |  |
| SENSORS |  |
| ECO |  |
| PUSH'N'DRIVE |  |

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE



SERIES 1900

Smallest single-pole rocker switches to 6 (2) A 250 V AC

Appliance cut-out: 19.2 x 6.8 mm
23.2 x 6.8 mm
30.0 x 6.8 mm



▶ PAGE
18 – 20

SERIES 1800

Single and double-pole rocker switches to 12 (4) A 250 V AC

Appliance cut-out: 19.2 x 12.9 mm
19.2 x 21.9 mm



▶ PAGE
21 – 35

SERIES 1890

Single-pole rocker switches illuminated with LED to 6 A 24 V DC

Appliance cut-out: 19.2 x 12.9 mm



▶ PAGE
36 – 37

SERIES 1881

Single-pole round rocker switches to 12 (4) A 250 V AC

Appliance cut-out: Ø 20.3 mm
Ø 21.2 mm



▶ PAGE
38 – 41

SERIES 1855

Miniature double-pole rocker switches to 4 (1) A 250 V AC

Appliance cut-out: 19.2 x 12.9 mm



▶ PAGE
42 – 44

SERIES 1858

Miniature double-pole rocker switches to 10 (4) A 250 V AC 1E4

Appliance cut-out: 19.2 x 12.9 mm



▶ PAGE
45 – 47

SERIES 1941

Single-pole rocker switches IP 50 to 12 (8) A 250 V AC 1E4

Appliance cut-out: 19.2 x 12.9 mm



▶ PAGE
48 – 49



SERIES 1550

Single-pole rocker switches
to 16 (4) A 250 V AC

Appliance cut-out: 26.2 x 12.4 mm
27.2 x 12.2 mm
28.6 x 14.0 mm



▶ PAGE
50 – 55

SERIES 1830

Single and double-pole
rocker switches
to 20 (4) A 250 V AC

Appliance cut-out: 30.0 x 11.0 mm
30.0 x 22.0 mm



▶ PAGE
56 – 69

SERIES 1930

Double-pole rocker switches IP 65
to 20 (4) A 250 V AC

Appliance cut-out: 30.0 x 22.0 mm



▶ PAGE
70 – 74

SERIES 1656

Single-pole rocker switches
to 10 A 250 V AC

Appliance cut-out: 28.0 x 13.0 mm



▶ PAGE
75 – 76

SERIES 3230

Single and double-pole
rocker switches
to 10 (5) A 12 and 24 V DC



▶ PAGE
77 – 82

SERIES 3250

Single and double-pole rocker
switches IP 66/IP 68
to 20 (10) A 12 and 24 V DC 1E5



▶ PAGE
83 – 93

SERIES 0344

Three-pole rocker switches
to 16 (6) A 400 V AC



▶ PAGE
94



SERIES 1900 - SMALLEST SINGLE-POLE ROCKER SWITCHES

TO 6 (2) A 250 V AC



PRODUCT FEATURES

- Reliable leaf spring contact system with contact spacing ≥ 3 mm
- Attractive, slim design
- Three sizes
- Low space requirement due to small sizes

ON REQUEST


- Other colors
- Other printing variants
- Cable assembly


| | |
|--|---|
| Mechanical life endurance | 75E3 |
| Operating force | 2 - 5 N |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 |
| Ambient temperature | terminal side -20 °C ... +85 °C actuating side -20 °C ... +55 °C |
| Flammability | UL 94 V-2 |
| Glow wire test temperature | 850 °C |
| Material actuator housing terminals | PA PA silver plated |
| Plug force of the terminals | ≤ 80 N |
| Approval marks | |
| Suitable for appliances of protection class II | |




SERIES 1900 - SMALLEST SINGLE-POLE ROCKER SWITCHES

TO 6 (2) A 250 V AC

|  single-pole | Actuator color / printing | Housing color | 6 (2) A 250 V AC 1E4 | 4 (1) A 250 V AC 5E4 | 30 mA 12 V DC 5E4 | 6 A 125 - 250 V AC 1/8 HP | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
|--|---------------------------|---------------|----------------------|----------------------|-------------------|---------------------------|---------------|----------------------|-----------------------|------------------|-----------------------|---------------|
| | ON / OFF switch (SPST) | | | | | | | | | | | |
| 1901.1102 | | Black | ○ | ○ | | ○ | | 4.8 | ≳ 3 | Ag | | ○ |
| 1901.1103 | | Black | ○ | ○ | | ○ | | 4.8 | ≳ 3 | Ag | | ○ |
| 1901.1106 | | White | ○ | ○ | | ○ | | 4.8 | ≳ 3 | Ag | rocker marking silver | |
| 1911.1102 | | Black | ○ | ○ | | ○ | | 4.8 | ≳ 3 | Ag | | ○ |
| 1911.1104 | | Black | ○ | ○ | | ○ | | 4.8 | ≳ 3 | Ag | | |
| 1921.1101 | | White | ○ | ○ | | ○ | | 4.8 | ≳ 3 | Ag | | |
| 1921.1102 | | Black | ○ | ○ | | ○ | | 4.8 | ≳ 3 | Ag | | ○ |
| 1901.1152 | | Black | | | ○ | | | 4.8 | ≳ 3 | Au | | |





Basic type 1901
single-pole



X = Wall thickness

| x | y | z |
|---------------|----------------------|---------------------|
| 0.75 ... 1.25 | 19.2 ^{-0.1} | 6.8 ^{+0.1} |
| 1.25 ... 2 | 19.4 ^{-0.1} | 6.8 ^{+0.1} |
| 2 ... 3 | 19.8 ^{-0.1} | 6.8 ^{+0.1} |

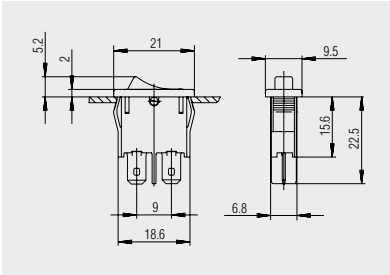


 Quick-connect terminal 4.8 x 0.8

ROCKERSWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SMP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH N' DRIVE




SERIES 1900 - SMALLEST SINGLE-POLE ROCKER SWITCHES

TO 6 (2) A 250 V AC

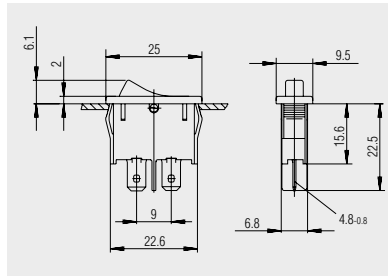


Basic type 1911
single-pole

Quick-connect terminal 4.8 x 0.8




X = Wall thickness

| x | y | z |
|---------------|----------------------|---------------------|
| 0.75 ... 1.25 | 23.2 ^{-0.1} | 6.8 ^{+0.1} |
| 1.25 ... 2 | 23.4 ^{-0.1} | 6.8 ^{+0.1} |
| 2 ... 3 | 23.8 ^{-0.1} | 6.8 ^{+0.1} |

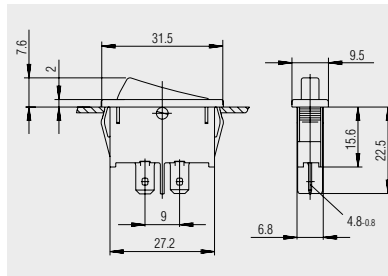

Basic type 1921
single-pole

Quick-connect terminal 4.8 x 0.8



X = Wall thickness

| x | y | z |
|---------------|----------------------|---------------------|
| 0.75 ... 1.25 | 30 ^{-0.1} | 6.8 ^{+0.1} |
| 1.25 ... 2 | 30.2 ^{-0.1} | 6.8 ^{+0.1} |
| 2 ... 3 | 30.6 ^{-0.1} | 6.8 ^{+0.1} |



SERIES 1800 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

T0 12 (4) A 250 V AC



PRODUCT FEATURES

- 100 million times proven switching principle
- High, flexible design variety
- Excellent actuating characteristic
- Illuminated and non-illuminated variants

ON REQUEST

- Other colors
- Other printing variants
- Other lamp variants
- Snap-on, customized actuators
- Cable assembly

| | |
|--|---|
| Mechanical life endurance | 10E4 5E4 (basic types 1808 and 1809) |
| Inrush current (capacitive) | 50 A 70 A (contact pairing Ag / Ag, product-dependent) |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 |
| Ambient temperature | terminal side -20 °C ... +100 °C ... +85 °C (product-dependent) actuating side -20 °C ... +55 °C |
| Flammability | UL 94 V-2 UL 94 V-0 (product-dependent) |
| Glow wire test temperature | 850 °C |
| Material actuator housing terminals | PA / PC PA silver plated / tinned / gold plated |
| Plug force of the terminals | ≤ 80 N |
| Approval marks | |
| Suitable for appliances of protection class II | |



SERIES 1800 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 12 (4) A 250 V AC

| single-pole | | ON / OFF switch (SPST) | | | | | | | | | | | | | | |
|---------------------------------|--|------------------------|---------------|-----------|-----------|-----------|-----------|-----------|----------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| | | 1800.0102 | 1800.0108 | 1800.1102 | 1800.1104 | 1800.1108 | 1801.1121 | 1801.1148 | 1801.1520 | 1801.1908 | 1801.1926 | 1801.6122 | 1801.6130 | 1801.1101 | 1801.1102 | 1801.1119 |
| Lighting voltage (V) | | 230 | 230 | 230 | 230 | 230 | | | | | | | | | | |
| Actuator color / printing | | | | | | | | | | | | | | | | |
| Housing color | | | | | | | | | | | | | | | | |
| 12 (4) A 250 V AC 1E4 | | | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | |
| 10 (4) A 250 V AC 1E4 | | ○ | ○ | ○ | ○ | ○ | | | | | | | | ○ | ○ | ○ |
| 8 (8) A 250 V AC 5E4 | | | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | |
| 6 (4) A 250 V AC 5E4 | | ○ | ○ | ○ | ○ | ○ | | | | | | | | ○ | ○ | ○ |
| 6 (2) A 250 V AC 1E4 | | | | | | | | | | | | | | | | |
| 4 (3) A 250 V AC 6E3 | | | | | | | | | | | | | | | | |
| 4 (2) A 250 V AC 1E4 | | | | | | | | | | | | | | | | |
| 30 mA 12 V DC 5E4 | | | | | | | | | | | | | | | | |
| 15 A 250 V AC 1 1/2 HP | | | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | |
| 15 A 125 V AC 3/4 HP | | | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | |
| 10 A 250 V AC 1/2 HP | | | | | | | | | | | | | | | | |
| 10 A 125 V AC 1/3 HP | | | | | | | | | | | | | | | | |
| 6 A 250 V AC 1/2 HP | | ○ | ○ | ○ | ○ | ○ | | | | | | | | ○ | ○ | ○ |
| 6 A 125 V AC 1/4 HP | | | | | | | | | | | | | | ○ | ○ | ○ |
| 6 A 125 - 250 V AC 1/8 HP | | | | | | | | | | | | | | | | |
| 6 A 125 V AC 1/10 HP | | | | | | | | | | | | | | | | |
| 4 A 250 V AC 1/10 HP | | | | | | | | | | | | | | | | |
| Terminal type | | | | | | | | | | | | | | | | |
| Terminal description | | | | 4.8 | 4.8 | 4.8 | 4.8 | 4.8 | 4.8 | 4.8 | 4.8 | 4.8 | | 4.8 | 4.8 | 4.8 |
| Inrush current (capacitive) (A) | | | | | | | 70 | 70 | 70 | 70 | 70 | 70 | 70 | | 50 | 50 |
| Contact distance (mm) | | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 |
| Contact material | | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag |
| EN 60335 cap. 30 conform "G" | | | | | | | | | | | ○ | ○ | | | | |
| Miscellaneous | | sealing plate | sealing plate | | | | | | snap-on rocker | | | | | | | |
| Stock version | | | | ○ | | ○ | ○ | | ○ | | ○ | | | ○ | ○ | ○ |

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MIKRO-SIGNALSCHALTER

SENSORS




























ECO

PUSH'N'DRIVE



SERIES 1800 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 12 (4) A 250 V AC


| <div style="text-align: center;">  <p>single-pole</p> </div> | ON / OFF switch (SPST) | | | | | | | | Normally closed contact (SPNC) | | Normally open contact (SPNO) | | |
|---|---|---|---|---|---|---|---|--|---|---|---|---|---|
| | 1801.1146 | 1801.1403 | 1801.2106 | 1801.2402 | 1801.2702 | 1801.5102 | 1801.6101 | 1801.6102 | 1801.6115 | 1801.1151 | 1801.1302 | 1801.1303 | 1801.6222 |
| Lighting voltage (V) | | | | | | | | | | | | | |
| Actuator color / printing |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Housing color | black | black | black | black | black | black | white | black | black | black | black | black | black |
| 12 (4) A 250 V AC 1E4 | | | | | | | | | | | | | |
| 10 (4) A 250 V AC 1E4 | o | o | o | o | o | o | o | o | o | | | | o |
| 8 (8) A 250 V AC 5E4 | | | | | | | | | | | | | |
| 6 (4) A 250 V AC 5E4 | o | o | o | o | o | o | o | o | o | | | | o |
| 6 (2) A 250 V AC 1E4 | | | | | | | | | | | | | |
| 4 (3) A 250 V AC 6E3 | | | | | | | | | | | | | |
| 4 (2) A 250 V AC 1E4 | | | | | | | | | | | o | o | |
| 30 mA 12 V DC 5E4 | | | | | | | | | | o | | | |
| 15 A 250 V AC 1 1/2 HP | | | | | | | | | | | | | |
| 15 A 125 V AC 3/4 HP | | | | | | | | | | | | | |
| 10 A 250 V AC 1/2 HP | | | | | | | | | | | | | |
| 10 A 125 V AC 1/3 HP | | | | | | | | | | | | | |
| 6 A 250 V AC 1/2 HP | o | o | o | o | o | o | o | o | o | | | | o |
| 6 A 125 V AC 1/4 HP | o | o | o | o | o | o | o | o | o | | | | o |
| 6 A 125 - 250 V AC 1/8 HP | | | | | | | | | | | | | |
| 6 A 125 V AC 1/10 HP | | | | | | | | | | | o | o | |
| 4 A 250 V AC 1/10 HP | | | | | | | | | | | o | o | |
| Terminal type |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Terminal description | 4.8 | 4.8 | | | | | | | | 4.8 | 4.8 | | |
| Inrush current (capacitive) (A) | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | | | | |
| Contact distance (mm) | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | | ≥ 3 | ≥ 3 | |
| Contact material | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Au | Ag | Ag | Ag |
| EN 60335 cap. 30 conform "G" | | | | | | | | | | o | | | |
| Miscellaneous | | with dust cap black | | installation depth 13.2 | installation depth 28.1 | | | | | | | | |
| Stock version | o | o | o | | | o | o | o | o | | | | o |

ROCKERSWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SMP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH N' DRIVE



SERIES 1800 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 12 (4) A 250 V AC

| <div style="text-align: center;">  <p>single-pole</p> </div> | Normally open contact (SPNO) | | Changeover switch (SPDT) | | | | | | Changeover switch with OFF position in the center (SPDT - Center OFF) | | | | |
|---|------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|---|--------------------------|--------------------------|--------------------------|-----------------------------|
| | 1801.1202 | 1801.2202 | 1803.1102 | 1803.1121 | 1803.2102 | 1803.5102 | 1803.6102 | 1803.6152 | 1808.1101 | 1808.1102 | 1808.1103 | 1808.1112 | 1808.1202 |
| Lighting voltage (V) | | | | | | | | | | | | | |
| Actuator color / printing | | | | | | | | | | | | | |
| Housing color | | | | | | | | | | | | | |
| 12 (4) A 250 V AC 1E4 | | | | | | | | | | | | | |
| 10 (4) A 250 V AC 1E4 | | | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | | | | | |
| 8 (8) A 250 V AC 5E4 | | | | | | | | | | | | | |
| 6 (4) A 250 V AC 5E4 | | | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | | | | | |
| 6 (2) A 250 V AC 1E4 | | | | | | | | | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 4 (3) A 250 V AC 6E3 | | | | | | | | | | | | | |
| 4 (2) A 250 V AC 1E4 | <input type="checkbox"/> | <input type="checkbox"/> | | | | | | | | | | | |
| 30 mA 12 V DC 5E4 | | | | | | | | <input type="checkbox"/> | | | | | |
| 15 A 250 V AC 1 1/2 HP | | | | | | | | | | | | | |
| 15 A 125 V AC 3/4 HP | | | | | | | | | | | | | |
| 10 A 250 V AC 1/2 HP | | | | <input type="checkbox"/> | | | | | | | | | |
| 10 A 125 V AC 1/3 HP | | | | <input type="checkbox"/> | | | | | | | | | |
| 6 A 250 V AC 1/2 HP | | | <input type="checkbox"/> | | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | | | | | |
| 6 A 125 V AC 1/4 HP | | | <input type="checkbox"/> | | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | | | | | |
| 6 A 125 - 250 V AC 1/8 HP | | | | | | | | | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 6 A 125 V AC 1/10 HP | <input type="checkbox"/> | <input type="checkbox"/> | | | | | | | | | | | |
| 4 A 250 V AC 1/10 HP | <input type="checkbox"/> | <input type="checkbox"/> | | | | | | | | | | | |
| Terminal type | | | | | | | | | | | | | |
| Terminal description | 4.8 | | 4.8 | 4.8 | | | | | 4.8 | 4.8 | 4.8 | 4.8 | 4.8 |
| Inrush current (capacitive) (A) | | | | | | | | | | | | | |
| Contact distance (mm) | Ag ≥ 3 | Ag ≥ 3 | Ag ≥ 3 | Ag ≥ 3 | Ag ≥ 3 | Ag ≥ 3 | Ag ≥ 3 | Au ≥ 3 | Ag < 3 | Ag < 3 | Ag < 3 | Ag < 3 | Ag < 3 |
| Contact material | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Au | Ag | Ag | Ag | Ag | Ag |
| EN 60335 cap. 30 conform "G" | | | | | | | | | | | <input type="checkbox"/> | | |
| Miscellaneous | | | | | | | | | | | | | momentary function one side |
| Stock version | <input type="checkbox"/> | | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | <input type="checkbox"/> | | | <input type="checkbox"/> | <input type="checkbox"/> | | <input type="checkbox"/> |

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MIKRO-SIGNALSCHALTER

SENSORS










































ECO

PUSH'N'DRIVE



SERIES 1800 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 12 (4) A 250 V AC


| single-pole | | Changeover switch with OFF position in the center (SPDT - Center OFF) | | | | | | | | | | Changeover switch (SPDT momentary) | | |
|---|---|---|---|---|---|---|---|---|--|---|---|---|---|---|
|  |  | 1808.1302 | 1808.2102 | 1808.2302 | 1808.2704 | 1808.6102 | 1808.6103 | 1808.6202 | 1808.6302 | 1808.1152 | 1808.1353 | 1803.6222 | 1803.1202 | 1803.1252 |
| Lighting voltage (V) | | | | | | | | | | | | | | |
| Actuator color / printing | |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Housing color | |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 12 (4) A 250 V AC 1E4 | | | | | | | | | | | | | | |
| 10 (4) A 250 V AC 1E4 | | | | | | | | | | | | ○ | | |
| 8 (8) A 250 V AC 5E4 | | | | | | | | | | | | ○ | | |
| 6 (4) A 250 V AC 5E4 | | | | | | | | | | | | | | |
| 6 (2) A 250 V AC 1E4 | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | | |
| 4 (3) A 250 V AC 6E3 | | | | | | | | | | | | | | |
| 4 (2) A 250 V AC 1E4 | | | | | | | | | | | | | ○ | |
| 30 mA 12 V DC 5E4 | | | | | | | | | | | | | | ○ |
| 15 A 250 V AC 1 1/2 HP | | | | | | | | | | | | | | |
| 15 A 125 V AC 3/4 HP | | | | | | | | | | | | ○ | | |
| 10 A 250 V AC 1/2 HP | | | | | | | | | | | | ○ | | |
| 10 A 125 V AC 1/3 HP | | | | | | | | | | | | | | |
| 6 A 250 V AC 1/2 HP | | | | | | | | | | | | | | |
| 6 A 125 V AC 1/4 HP | | | | | | | | | | | | | | |
| 6 A 125 - 250 V AC 1/8 HP | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | | |
| 6 A 125 V AC 1/10 HP | | | | | | | | | | | | | ○ | |
| 4 A 250 V AC 1/10 HP | | | | | | | | | | | | | ○ | |
| Terminal type | |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Terminal description | | 4.8 | | | | | | | | | | 4.8 | | 4.8 |
| Inrush current (capacitive) (A) | | | | | | | | | | | | | | |
| Contact distance (mm) | | < 3 | < 3 | < 3 | < 3 | < 3 | < 3 | < 3 | < 3 | < 3 | < 3 | ≥ 3 | ≥ 3 | ≥ 3 |
| Contact material | | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Au | Au | Ag | Ag | Au |
| EN 60335 cap. 30 conform "G" | | | | | | | | | | | | | | |
| Miscellaneous | | momentary function both sides | PCB tinned | PCB tinned momentary function both sides | installation depth 29.6 | | | momentary function one side | momentary function both sides | | | | | momentary function both sides |
| Stock version | | ○ | ○ | ○ | | ○ | ○ | | ○ | | | ○ | ○ | |

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SMAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH N' DRIVE



SERIES 1800 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 12 (4) A 250 V AC

|  | | ON / OFF switch (DPST) | | | | | | | | | | | | | | |
|---|--|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|--|--|-----------|-----------|-------------------------|-------------------|-----------|-----------|-----------|-----------|
| Lighting voltage (V) | | 1805.6102 | 1805.6108 | 1805.7104 | 1805.7109 | 1805.7110 | 1805.7112 | 1805.7118 | 1802.1121 | 1802.1123 | 1802.2504 | 1802.3311 | 1802.6123 | 1802.1101 | 1802.1102 | 1802.1108 |
| Actuator color / printing | | | | | | | | | | | | | | | | |
| Housing color | | | | | | | | | | | | | | | | |
| 12 (4) A 250 V AC 1E4 | | | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | |
| 10 (4) A 250 V AC 1E4 | | ○ | ○ | ○ | ○ | ○ | | | | | | | | ○ | ○ | ○ |
| 8 (8) A 250 V AC 5E4 | | | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | |
| 6 (4) A 250 V AC 5E4 | | ○ | ○ | ○ | ○ | ○ | | | | | | | | ○ | ○ | ○ |
| 6 (2) A 250 V AC 1E4 | | | | | | | | | | | | | | | | |
| 4 (3) A 250 V AC 6E3 | | | | | | | | | | | | | | | | |
| 4 (2) A 250 V AC 1E4 | | | | | | | | | | | | | | | | |
| 30 mA 12 V DC 5E4 | | | | | | | | | | | | | | | | |
| 15 A 250 V AC 1 1/2 HP | | | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | |
| 15 A 125 V AC 3/4 HP | | | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | |
| 10 A 250 V AC 1/2 HP | | | | | | | | | | | | | | | | |
| 10 A 125 V AC 1/3 HP | | | | | | | | | | | | | | | | |
| 6 A 250 V AC 1/2 HP | | ○ | ○ | ○ | ○ | ○ | | | | | | | | ○ | ○ | ○ |
| 6 A 125 V AC 1/4 HP | | | | | | | | | | | | | | ○ | ○ | ○ |
| 6 A 125 - 250 V AC 1/8 HP | | | | | | | | | | | | | | | | |
| 6 A 125 V AC 1/10 HP | | | | | | | | | | | | | | | | |
| 4 A 250 V AC 1/10 HP | | | | | | | | | | | | | | | | |
| Terminal type | | | | | | | | | | | | | | | | |
| Terminal description | | | | 4.8 | 4.8 | 4.8 | 4.8 | 4.8 | 4.8 | 4.8 | 4.3 lang | 4.8 75° angled M3 | | 4.8 | 4.8 | 4.8 |
| Inrush current (capacitive) (A) | | 50 | 50 | 50 | 50 | 50 | 70 | 70 | 70 | 70 | 70 | 70 | 70 | 50 | 50 | 50 |
| Contact distance (mm) | | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 |
| Contact material | | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag |
| EN 60335 cap. 30 conform "G" | | | | | | | ○ | | | | | | | | | |
| Miscellaneous | | installation depth 17.5 | installation depth 17.5 | installation depth 19.5 | installation depth 19.5 | installation depth 19.5 | installation depth 20.5 ignition voltage < 100 V | installation depth 20.5 ignition voltage < 100 V | | | installation depth 16.2 | shortened gate | | | | |
| Stock version | | | | ○ | ○ | ○ | | ○ | ○ | ○ | | | ○ | ○ | ○ | ○ |

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SWAP-ACTION SWITCHES

MIKRO-SIGNALSCHALTER

SENSORS


ECO

PUSH'N'DRIVE



SERIES 1800 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 12 (4) A 250 V AC

|  double-pole | | ON / OFF switch (DPST) | | | | | Normally open contact (DPNO) | Changeover switch (DPDT) | | | | Changeover switch with OFF position in the center (DPDT - Center OFF) | |
|--|---------------------------|------------------------|-----------|-----------|-----------|-----------|------------------------------|--------------------------|-----------------|-----------|-----------|---|-----------------------------|
| Lighting voltage (V) | Actuator color / printing | 1802.2102 | 1802.2104 | 1802.3102 | 1802.5103 | 1802.6152 | 1802.1221 | 1804.1102 | 1804.1125 | 1804.2102 | 1804.6121 | 1809.1102 | 1809.1202 |
| Housing color | | [Red/Black] | | | | | [Black] | [Black] | | | | [Black] | |
| 12 (4) A 250 V AC 1E4 | | | | | | | | | | | | | |
| 10 (4) A 250 V AC 1E4 | | ○ | ○ | ○ | ○ | | | ○ | ○ | ○ | ○ | | |
| 8 (8) A 250 V AC 5E4 | | | | | | | | | | | | | |
| 6 (4) A 250 V AC 5E4 | | ○ | ○ | ○ | ○ | | | ○ | ○ | ○ | ○ | | |
| 6 (2) A 250 V AC 1E4 | | | | | | | | | | | | ○ | |
| 4 (3) A 250 V AC 6E3 | | | | | | | | | | | | | ○ |
| 4 (2) A 250 V AC 1E4 | | | | | | | ○ | | | | | | |
| 30 mA 12 V DC 5E4 | | | | | | ○ | | | | | | | |
| 15 A 250 V AC 1 1/2 HP | | | | | | | | | | | | | |
| 15 A 125 V AC 3/4 HP | | | | | | | | | | | | | |
| 10 A 250 V AC 1/2 HP | | | | | | | | | ○ | | | | |
| 10 A 125 V AC 1/3 HP | | | | | | | | | ○ | | ○ | | |
| 6 A 250 V AC 1/2 HP | | ○ | ○ | ○ | ○ | | | ○ | | ○ | | | |
| 6 A 125 V AC 1/4 HP | | ○ | ○ | ○ | ○ | | | ○ | | ○ | | | |
| 6 A 125 - 250 V AC 1/8 HP | | | | | | | | | | | | ○ | |
| 6 A 125 V AC 1/10 HP | | | | | | | | | | | | ○ | |
| 4 A 250 V AC 1/10 HP | | | | | | | | | | | | ○ | |
| Terminal type | | ⌋ | ⌋ | ⌋ | ⌋ | ⌋ | ⌋ | ⌋ | ⌋ | ⌋ | ⌋ | ⌋ | ⌋ |
| Terminal description | | | | 4.8 M3 | | | 4.8 | 4.8 | 1 mm longer 4.8 | | | 4.8 | 4.8 |
| Inrush current (capacitive) (A) | | 50 | 50 | 50 | 50 | | | | | | | | |
| Contact distance (mm) | | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | < 3 | < 3 |
| Contact material | | Ag | Ag | Ag | Ag | Au | Ag | Ag | Ag | Ag | Ag | Ag | Ag |
| EN 60335 cap. 30 conform "G" | | | | | | | | | | | | | |
| Miscellaneous | | | | | | | | | | | | | momentary function one side |
| Stock version | | ○ | ○ | ○ | ○ | | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

ROCKER SWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 MICRO-SIGNAL SWITCHES
 SMP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH N' DRIVE



SERIES 1800 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 12 (4) A 250 V AC

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MIKRO-SIGNALSCHALTER

SENSORS

ECO











PUSH'N'DRIVE

| <p>double-pole</p> | | 1809.1302 | | 1809.2102 | | 1804.1225 | |
|---------------------------------|--|---|------------|------------------------------------|--|-----------------|--|
| | | Changeover switch with OFF position in the center (DPDT - Center OFF) | | Changeover switch (DPDT momentary) | | | |
| Lighting voltage (V) | | | | | | | |
| Actuator color / printing | | | | | | | |
| Housing color | | | | | | | |
| 12 (4) A 250 V AC 1E4 | | | | | | | |
| 10 (4) A 250 V AC 1E4 | | | | | | | |
| 8 (8) A 250 V AC 5E4 | | | | | | | |
| 6 (4) A 250 V AC 5E4 | | | | | | | |
| 6 (2) A 250 V AC 1E4 | | ○ | ○ | | | | |
| 4 (3) A 250 V AC 6E3 | | | | | | ○ | |
| 4 (2) A 250 V AC 1E4 | | | | | | | |
| 30 mA 12 V DC 5E4 | | | | | | | |
| 15 A 250 V AC 1 1/2 HP | | | | | | | |
| 15 A 125 V AC 3/4 HP | | | | | | | |
| 10 A 250 V AC 1/2 HP | | | | | | | |
| 10 A 125 V AC 1/3 HP | | | | | | | |
| 6 A 250 V AC 1/2 HP | | | | | | | |
| 6 A 125 V AC 1/4 HP | | | | | | | |
| 6 A 125 - 250 V AC 1/8 HP | | ○ | ○ | | | | |
| 6 A 125 V AC 1/10 HP | | | | | | ○ | |
| 4 A 250 V AC 1/10 HP | | | | | | ○ | |
| Terminal type | | | | | | | |
| Terminal description | | 4.8 | | | | 1 mm longer 4.8 | |
| Inrush current (capacitive) (A) | | | | | | | |
| Contact distance (mm) | | < 3 | < 3 | | | ≥ 3 | |
| Contact material | | Ag | Ag | | | Ag | |
| EN 60335 cap. 30 conform "G" | | | | | | | |
| Miscellaneous | | momentary function both sides | PCB tinned | | | | |
| Stock version | | ○ | | | | | |



SERIES 1800 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 12 (4) A 250 V AC

















| Combination  | ON / OFF switch (SPST) | | Changeover switch with OFF position in the center (SPDT - Center OFF) |
|--|---|---|---|
| | 1806.1102 | 1806.6108 | |
| Lighting voltage (V) | | | |
| Actuator color / printing |  |  |  |
| Housing color |  |  |  |
| 12 (4) A 250 V AC 1E4 | | | |
| 10 (4) A 250 V AC 1E4 | ○ | ○ | |
| 8 (8) A 250 V AC 5E4 | | | |
| 6 (4) A 250 V AC 5E4 | ○ | ○ | |
| 6 (2) A 250 V AC 1E4 | | | ○ |
| 4 (3) A 250 V AC 6E3 | | | |
| 4 (2) A 250 V AC 1E4 | | | |
| 30 mA 12 V DC 5E4 | | | |
| 15 A 250 V AC 1 1/2 HP | | | |
| 15 A 125 V AC 3/4 HP | | | |
| 10 A 250 V AC 1/2 HP | | | |
| 10 A 125 V AC 1/3 HP | | | |
| 6 A 250 V AC 1/2 HP | ○ | ○ | |
| 6 A 125 V AC 1/4 HP | ○ | ○ | |
| 6 A 125 - 250 V AC 1/8 HP | | | |
| 6 A 125 V AC 1/10 HP | | | |
| 4 A 250 V AC 1/10 HP | | | |
| Terminal type |  |  |  |
| Terminal description | 4.8 | | 4.8 |
| Inrush current (capacitive) (A) | | | |
| Contact distance (mm) | ≥ 3 | ≥ 3 | < 3 |
| Contact material | Ag | Ag | Ag |
| EN 60335 cap. 30 conform "G" | | | |
| Miscellaneous | | without separating gate | life endurance 50.000 cycles |
| Stock version | ○ | | |

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH N' DRIVE



SERIES 1800 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 12 (4) A 250 V AC

|  <p>Lamp</p> | Lamp | | | | |
|---|--|---|---|---|---|
| | 1806.1508 | 1807.1102 | 1807.1108 | 1807.1126 | 1807.6103 |
| Lighting voltage (V) | 230 230 | 230 | 230 | 230 | 230 |
| Actuator color / printing |  |  |  |  |  |
| Housing color |  |  |  |  |  |
| 12 (4) A 250 V AC 1E4 | | | | | |
| 10 (4) A 250 V AC 1E4 | | | | | |
| 8 (8) A 250 V AC 5E4 | | | | | |
| 6 (4) A 250 V AC 5E4 | | | | | |
| 6 (2) A 250 V AC 1E4 | | | | | |
| 4 (3) A 250 V AC 6E3 | | | | | |
| 4 (2) A 250 V AC 1E4 | | | | | |
| 30 mA 12 V DC 5E4 | | | | | |
| 15 A 250 V AC 1 1/2 HP | | | | | |
| 15 A 125 V AC 3/4 HP | | | | | |
| 10 A 250 V AC 1/2 HP | | | | | |
| 10 A 125 V AC 1/3 HP | | | | | |
| 6 A 250 V AC 1/2 HP | | | | | |
| 6 A 125 V AC 1/4 HP | | | | | |
| 6 A 125 - 250 V AC 1/8 HP | | | | | |
| 6 A 125 V AC 1/10 HP | | | | | |
| 4 A 250 V AC 1/10 HP | | | | | |
| Terminal type |  |  |  |  |  |
| Terminal description | 4.8 | 4.8 | 4.8 | 4.8 | 4.8 |
| Inrush current (capacitive) (A) | | | | | |
| Contact distance (mm) | | | | | |
| Contact material | | | | | |
| EN 60335 cap. 30 conform "G" | | | | | |
| Miscellaneous | | VDE | VDE | VDE | size basic type 1805 VDE |
| Stock version | | ○ | ○ | | |

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MIKRO-SIGNALSCHALTER

SENSORS

ECO

PUSH'N'DRIVE




SERIES 1800 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

T0 12 (4) A 250 V AC




Basic types 1801
single-pole
illuminated / non-illuminated




X = Wall thickness


| x | y | z |
|---------------|----------------------|----------------------|
| 0.75 ... 1.25 | 19.2 ^{-0.1} | 12.9 ^{+0.1} |
| 1.25 ... 2 | 19.4 ^{-0.1} | 12.9 ^{+0.1} |
| 2 ... 3 | 19.8 ^{-0.1} | 12.9 ^{+0.1} |

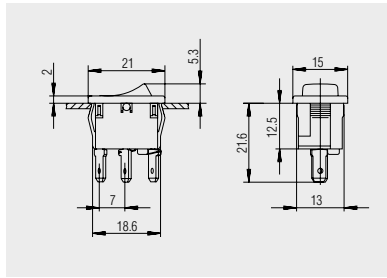


Quick-connect terminal 4.8 x 0.8
basic type 1800

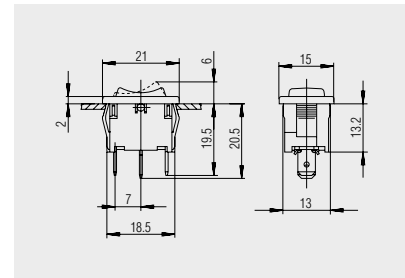


Quick-connect terminal 4.8 x 0.8
basic type 1808

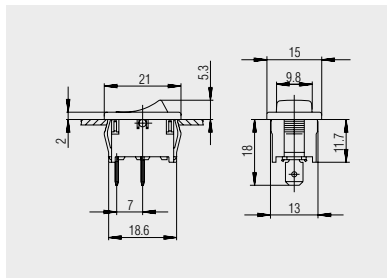


Quick-connect terminal 4.8 x 0.8
basic types 1801 and 1803

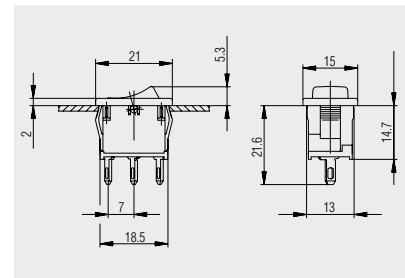


Solder terminal
basic type 1800

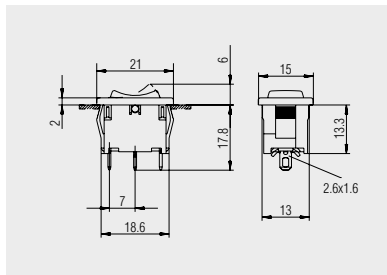

Solder terminal
basic type 1808

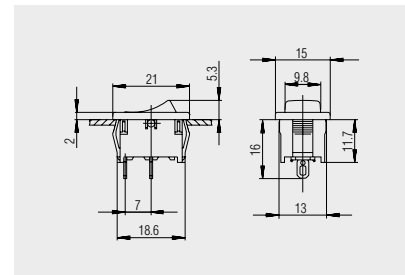

Solder terminal
basic types 1801 and 1803

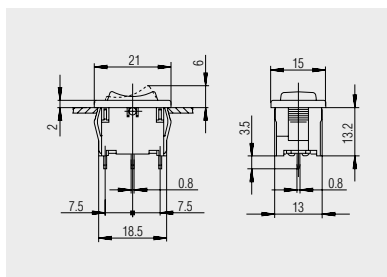

PCB terminal
basic type 1808




SERIES 1800 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 12 (4) A 250 V AC




Basic types 1802, 1804 and 1805 double-pole illuminated / non-illuminated




X = Wall thickness


| x | y | z |
|---------------|----------------------|----------------------|
| 0.75 ... 1.25 | 19.2 ^{-0.1} | 21.9 ^{+0.1} |
| 1.25 ... 2 | 19.4 ^{-0.1} | 21.9 ^{+0.1} |
| 2 ... 3 | 19.8 ^{-0.1} | 21.9 ^{+0.1} |

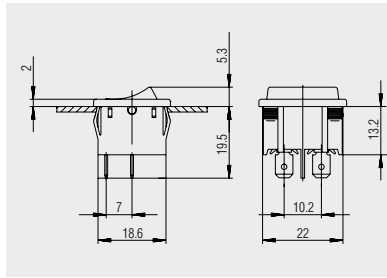


Quick-connect terminal 4.8 x 0.8 basic type 1805

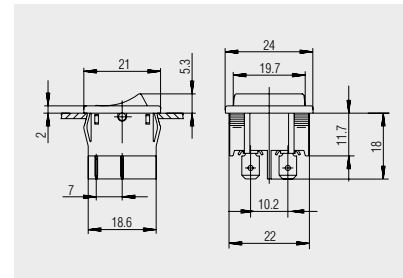


Quick-connect terminal 4.8 x 0.8 basic types 1802 and 1804

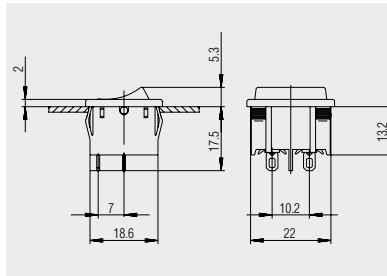


Solder terminal basic type 1805

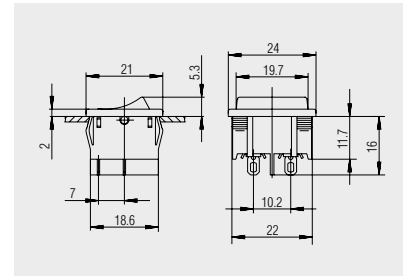


Solder terminal basic types 1802 and 1804

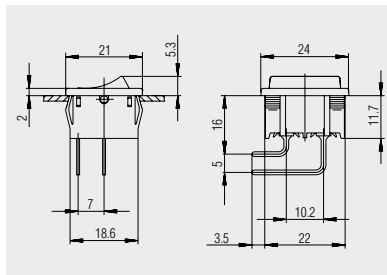

PCB terminal angled

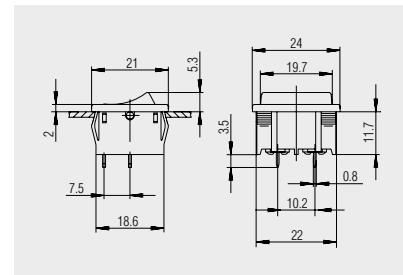

PCB terminal basic types 1802 and 1804

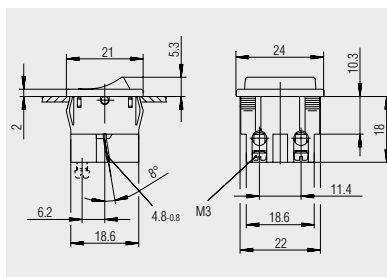

Terminal 1 2 Quick-connect terminal 4.8 x 0.8 Terminal 1a 2a Socket terminal M3 1802.3102




SERIES 1800 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 12 (4) A 250 V AC




Basic type 1809
double-pole
non-illuminated




X = Wall thickness

| x | y | z |
|---------------|----------------------|----------------------|
| 0.75 ... 1.25 | 19.2 ^{-0.1} | 21.9 ^{+0.1} |
| 1.25 ... 2 | 19.4 ^{-0.1} | 21.9 ^{+0.1} |
| 2 ... 3 | 19.8 ^{-0.1} | 21.9 ^{+0.1} |

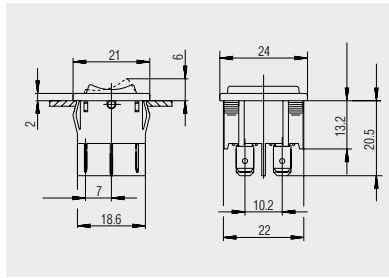


Quick-connect terminal 4.8 x 0.8

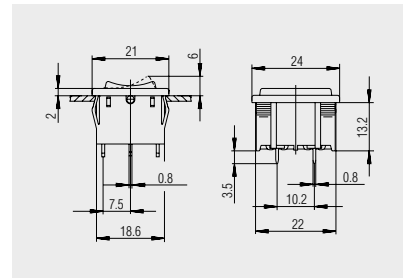

PCB terminal




Basic type 1806
combination




X = Wall thickness


| x | y | z |
|---------------|----------------------|----------------------|
| 0.75 ... 1.25 | 19.2 ^{-0.1} | 21.9 ^{+0.1} |
| 1.25 ... 2 | 19.4 ^{-0.1} | 21.9 ^{+0.1} |
| 2 ... 3 | 19.8 ^{-0.1} | 21.9 ^{+0.1} |

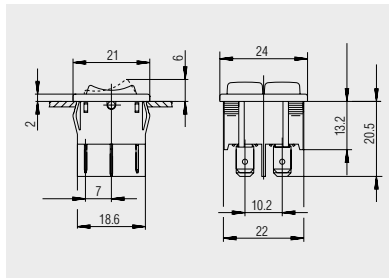

Quick-connect terminal 4.8 x 0.8
1806.1102

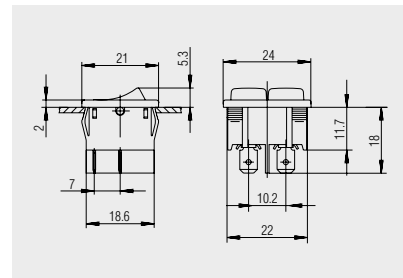

Quick-connect terminal 4.8 x 0.8
1806.1602

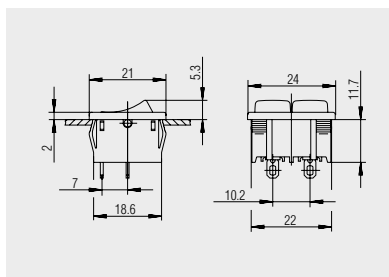


Solder terminal
1806.6108




SERIES 1800 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 12 (4) A 250 V AC

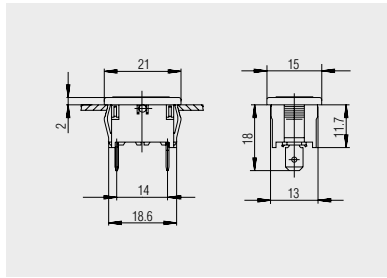


Basic type 1807 lamp

Quick-connect terminal 4.8 x 0.8




X = Wall thickness

| x | y | z |
|---------------|----------------------|----------------------|
| 0.75 ... 1.25 | 19.2 ^{-0.1} | 12.9 ^{+0.1} |
| 1.25 ... 2 | 19.4 ^{-0.1} | 12.9 ^{+0.1} |
| 2 ... 3 | 19.8 ^{-0.1} | 12.9 ^{+0.1} |

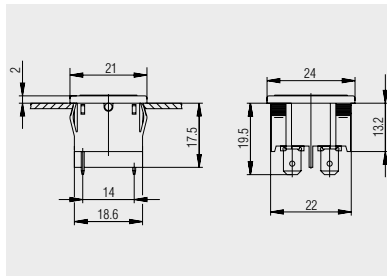

Basic type 1807 lamp

Quick-connect terminal 4.8 x 0.8



X = Wall thickness

| x | y | z |
|---------------|----------------------|----------------------|
| 0.75 ... 1.25 | 19.2 ^{-0.1} | 21.9 ^{+0.1} |
| 1.25 ... 2 | 19.4 ^{-0.1} | 21.9 ^{+0.1} |
| 2 ... 3 | 19.8 ^{-0.1} | 21.9 ^{+0.1} |




SERIES 1800 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 12 (4) A 250 V AC




Protection cap
203.089.011

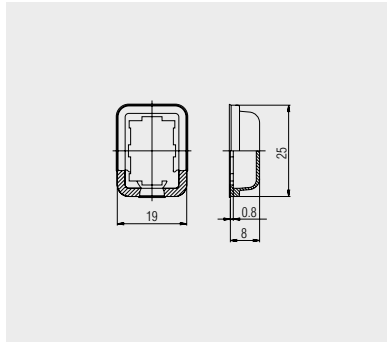

Transparent PVC-protection cap for single-pole switches of basic types 1800, 1801, 1803 and 1808. Serves as dust and water protection of the actuation side.




Protection cap
203.090.011

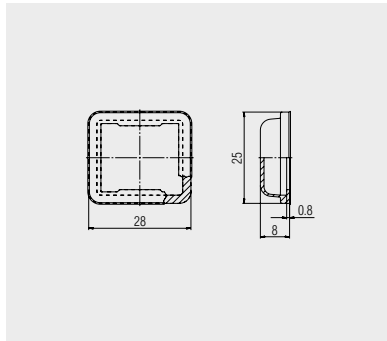

Transparent PVC-protection cap for double-pole switches of basic types 1802, 1804, 1805 and 1809. Serves as dust and water protection of the actuation side.




Dummy piece
203.086.013

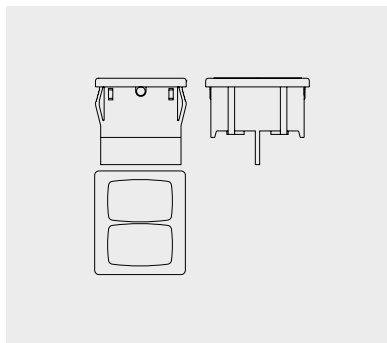

Dummy piece for size of basic type 1802, 1804, 1805, 1806, 1807 and 1809 made of PA with window and housing in black



Dummy piece
203.007.013
203.007.023 - V0 material

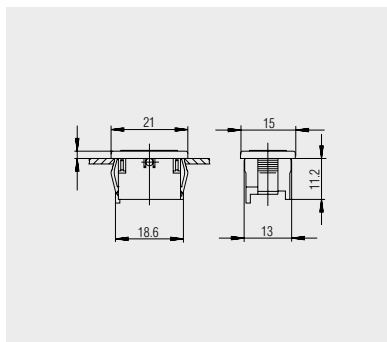

Dummy piece for size of basic type 1800, 1801, 1803, 1807, 1808, 1811, 1813, 1818, 1846, 1850 and 1858 made of PA with window and housing in black

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH N' DRIVE

➤ SERIES 1890 - SINGLE-POLE ROCKER SWITCHES ILLUMINATED WITH LED

TO 6 A 24 V DC



PRODUCT FEATURES

- ➔ Illuminated with LED
- ➔ High mechanical life endurance





ON REQUEST

- ➔ Other colors
- ➔ Printing
- ➔ Other terminal types
- ➔ Variant for mains application

| | |
|---|--|
| Mechanical life endurance | 75E3 |
| Operating force | 3 N |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 |
| Ambient temperature | terminal side -20 °C ... +100 °C actuating side -20 °C ... +55 °C |
| Flammability | UL 94 (actuator: V-2, housing: V-0) |
| Glow wire test temperature | 850 °C |
| Material | actuator housing terminals |
| | PA PA silver plated |
| Plug force of the terminals | ≤ 80 N |
| Suitable for appliances of protection class II | |


➔ SERIES 1890 - SINGLE-POLE ROCKER SWITCHES ILLUMINATED WITH LED


TO 6 A 24 V DC


| | | | | | | | | | | |
|------------------------|----------------------|---|---|---|---|----------------------|-----------------------|------------------|---------------|---------------|
| single-pole | Lighting voltage (V) | Actuator color / printing | Housing color | 6 A 24 V DC | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
| ON / OFF switch (SPST) | | | | | | | | | | |
| 1890.1104 | 24 |  |  |  |  | 4.8 | 3 | Ag | | |



Basic type 1890

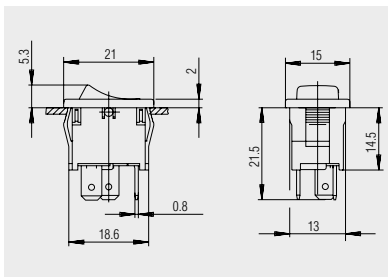

 Quick-connect terminal 4.8 x 0.8




X = Wall thickness

| x | y | z |
|---------------|----------------------|----------------------|
| 0.75 ... 1.25 | 19.2 ^{-0.1} | 12.9 ^{+0.1} |
| 1.25 ... 2 | 19.4 ^{-0.1} | 12.9 ^{+0.1} |
| 2 ... 3 | 19.8 ^{-0.1} | 12.9 ^{+0.1} |



Protection cap
203.089.011

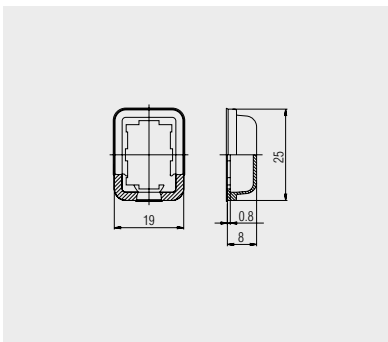

Transparent PVC-protection cap.
Serves as dust and water protection
of the actuation side.



SERIES 1881 - SINGLE-POLE ROUND ROCKER SWITCHES

TO 12 (4) A 250 V AC



PRODUCT FEATURES

- Attractive round rocker switch
- High mechanical rating with at least 100 000 switching cycles
- Variants with IP 51
- Low depth with 18.7 mm
- Appliance cut-out with 20 mm

ON REQUEST





















- Other colors
- Other printing variants
- Other terminal variants (e.g. PCB)
- Cable assembly
- Gold-plated contacts for low voltages
- Other switching functions (e.g. 1888 - middle off)
- Painted variants

| | |
|--|--|
| Mechanical life endurance | 10E4 |
| Operating force | 3 N |
| Inrush current (capacitive) | 70 A |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 and IP 51 (product-dependent) |
| Ambient temperature | terminal side -20 °C ... +100 °C actuating side -20 °C ... +55 °C |
| Flammability | UL 94 V-2 UL 94 V-0 (product-dependent) |
| Glow wire test temperature | 850 °C |
| Material actuator housing terminals | PA PA silver plated |
| Plug force of the terminals | ≤ 80 N |
| Approval marks | |
| Suitable for appliances of protection class II | |



SERIES 1881 - SINGLE-POLE ROUND ROCKER SWITCHES

TO 12 (4) A 250 V AC

|  single-pole | Actuator color / printing | Housing color | 12 (4) A 250 V AC 1E4 | 10 (4) A 250 V AC 1E4 | 8 (8) A 250 V AC 5E4 | 6 (4) A 250 V AC 5E4 | 15 A 250 V AC 1 1/2 HP | 15 A 125 V AC 3/4 HP | 10 A 250 V AC 1/2 HP | 10 A 125 V AC 1/3 HP | Terminal type | Terminal description | Contact distance (mm) | Contact material | Actuator | Miscellaneous | Stock version |
|--|---|---------------|-----------------------|-----------------------|----------------------|----------------------|------------------------|----------------------|----------------------|----------------------|---|----------------------|-----------------------|------------------|----------|---------------|--|
| | | | | | | | | | | | | | | | | | |
| ON / OFF switch (SPST) | | | | | | | | | | | | | | | | | |
| 1881.1103 |  | Black | ○ | ○ | | ○ | ○ | | | |  | 4.8 | ≥ 3 | Ag | IP 40 | | ○ |
| 1881.1104 |  | Black | ○ | ○ | | ○ | ○ | | | |  | 4.8 | ≥ 3 | Ag | IP 40 | | ○ |
| 1881.1105 |  | White | ○ | ○ | | ○ | ○ | | | |  | 4.8 | ≥ 3 | Ag | IP 40 | | ○ |
| 1881.1106 |  | Black | ○ | ○ | | ○ | ○ | | | |  | 4.8 | ≥ 3 | Ag | IP 40 | ○ | |
| 1881.1108 |  | Black | ○ | ○ | | ○ | ○ | | | |  | 4.8 | ≥ 3 | Ag | IP 51 | ○ | with swtiching system cover |
| 1881.1109 |  | Black | ○ | ○ | | ○ | ○ | | | |  | 4.8 | ≥ 3 | Ag | IP 40 | | |
| 1881.1111 |  | Black | ○ | ○ | | ○ | ○ | | | |  | 4.8 | ≥ 3 | Ag | IP 40 | | |
| 1881.1112 |  | White | ○ | ○ | | ○ | ○ | | | |  | 1 mm longer 4.8 | ≥ 3 | Ag | IP 51 | ○ | with swtiching system cover |
| Normally open contact (SPNO) | | | | | | | | | | | | | | | | | |
| 1881.1209 |  | Black | | | | | | | | |  | 4.8 | ≥ 3 | Ag | IP 51 | | with swtiching system cover opening terminal 1b closed |
| Changeover switch (SPDT) | | | | | | | | | | | | | | | | | |
| 1883.1105 |  | Black | | ○ | ○ | | | ○ | ○ | |  | 4.8 | ≥ 3 | Ag | IP 40 | | |
| 1883.1106 |  | Black | | ○ | ○ | | | ○ | ○ | |  | 4.8 | ≥ 3 | Ag | IP 40 | ○ | |

ROCKERSWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SNAP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH N' DRIVE




SERIES 1881 - SINGLE-POLE ROUND ROCKER SWITCHES


TO 12 (4) A 250 V AC




Basic type 1881

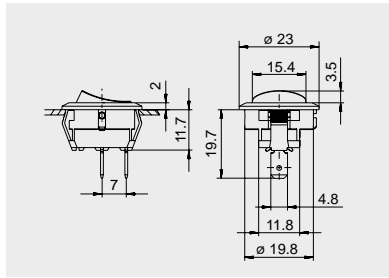

Quick-connect terminal 1 mm longer 4.8 x 0.8

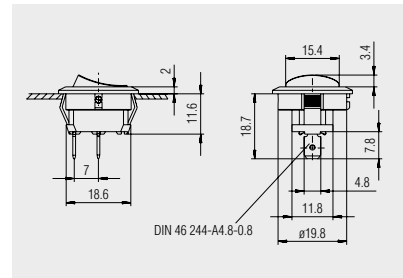

Quick-connect terminal 4.8 x 0.8




X = Wall thickness


| x | Ø |
|---------------|------|
| 0.75 ... 1.25 | 20.3 |
| 1.25 ... 2 | 20.8 |
| 2 ... 3 | 21.1 |



Basic type 1883

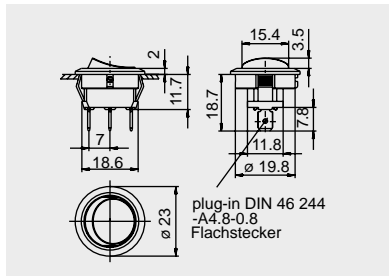

Quick-connect terminal 4.8 x 0.8



X = Wall thickness

| x | Ø |
|---------------|----------------------|
| 0.75 ... 1.25 | 21.2 ^{+0.1} |
| 1.25 ... 2 | 21.4 ^{+0.1} |
| 2 ... 3 | 21.8 ^{+0.1} |

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE




SERIES 1881 - SINGLE-POLE ROUND ROCKER SWITCHES

TO 12 (4) A 250 V AC



Protection cap
207.122.011

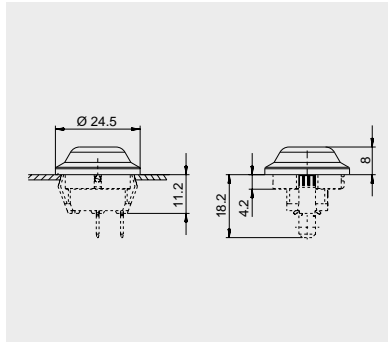

Transparent PVC - protection cap.
Serves as dust and water protection
of the actuation side.

Further information under

WWW.MARQUARDT-SWITCHES.COM

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH-IN DRIVE



SERIES 1855 - MINIATURE DOUBLE-POLE ROCKER SWITCHES

TO 4 (1) A 250 V AC






PRODUCT FEATURES

- Illuminated rocker switches
- Different lamp variants
- Powerful with 50 000 mechanical switching cycles
- Caulked terminals for reliable plugging of the receptacles

ON REQUEST




















- Other colors
- Other printing variants
- Other terminal types
- Other lamp variants
- Cable assembly

| | |
|---|---|
| Mechanical life endurance | 5E4 |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 |
| Ambient temperature | terminal side -20 °C ... +85 °C actuating side -20 °C ... +55 °C |
| Flammability | UL 94 V-2 |
| Glow wire test temperature | 850 °C |
| Material | actuator PA housing PA terminals silver plated |
| Plug force of the terminals | ≤ 80 N |
| Approval marks |  /  /  |
| Suitable for appliances of protection class II | |



SERIES 1855 - MINIATURE DOUBLE-POLE ROCKER SWITCHES

TO 4 (1) A 250 V AC

|  double-pole | Lighting voltage (V) | Actuator color / printing | Housing color | 4 (1) A 250 V AC 1E4 | | | Terminal type | Terminal description | Contact distance (mm) | Contact material | EN 60335 cap. 30 conform "G" | Stock version |
|--|----------------------|---|---------------|----------------------|----------------------|----------------------|---|----------------------|-----------------------|------------------|------------------------------|---------------|
| | | | | | 6 A 125 V AC 1/10 HP | 4 A 250 V AC 1/10 HP | | | | | | |
| ON / OFF switch (DPST) | | | | | | | | | | | | |
| 1855.0102 | 230 |  | | ○ | | ○ |  | | ≥ 3 | Ag | | ○ |
| 1855.0108 | 230 |  | | ○ | | ○ |  | | ≥ 3 | Ag | | ○ |
| 1855.1102 | 230 |  | | ○ | | ○ |  | 4.8 | ≥ 3 | Ag | | ○ |
| 1855.1104 | 230 |  | | ○ | | ○ |  | 4.8 | ≥ 3 | Ag | | ○ |
| 1855.1108 | 230 |  | | ○ | | ○ |  | 4.8 | ≥ 3 | Ag | | ○ |
| 1855.1115 | 230 |  | | ○ | | ○ |  | 4.8 | ≥ 3 | Ag | ○ | |
| 1855.1118 | 230 |  | | ○ | | ○ |  | 4.8 | ≥ 3 | Ag | ○ | |
| 1855.1122 | 110 |  | | | ○ | |  | 4.8 | ≥ 3 | Ag | | |
| 1855.1124 | 110 |  | | | ○ | |  | 4.8 | ≥ 3 | Ag | | |

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH N' DRIVE




SERIES 1855 - MINIATURE DOUBLE-POLE ROCKER SWITCHES


TO 4 (1) A 250 V AC




Basic type 1855

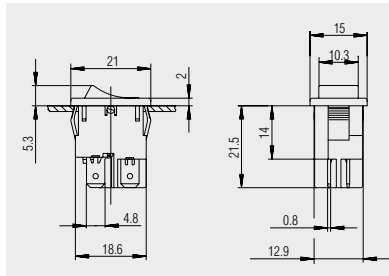

Quick-connect terminal 4.8 x 0.8

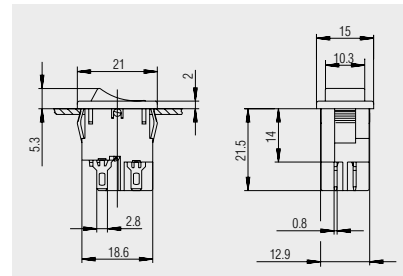

Solder terminal




X = Wall thickness

| x | y | z |
|---------------|----------------------|----------------------|
| 0.75 ... 1.25 | 19.2 ^{-0.1} | 12.9 ^{+0.1} |
| 1.25 ... 2 | 19.4 ^{-0.1} | 12.9 ^{+0.1} |
| 2 ... 3 | 19.8 ^{-0.1} | 12.9 ^{+0.1} |



Protection cap
203.089.011

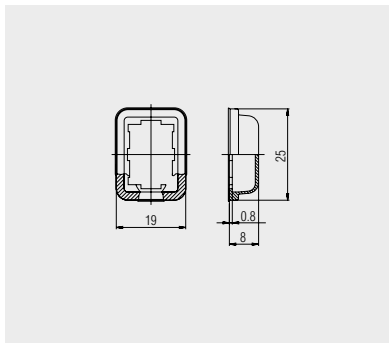

Transparent PVC-protection cap.
Serves as dust and water protection
for the actuating side.



SERIES 1858 - MINIATURE DOUBLE-POLE ROCKER SWITCHES

TO 10 (4) A 250 V AC 1E4



PRODUCT FEATURES

- Non-illuminated rocker switch
- Powerful with inrush currents (capacitive) up to 100 A
- Immediately self-extinguishing due to UL 94 V-0 material
- Conformant acc. to EN 60065 par. 14.6

ON REQUEST


- Other colors
- Other printing variants
- Single-pole assembled
- Cable assembly

| | |
|---|--|
| Mechanical life endurance | 10E4 |
| Operating force | ≤ 5 N |
| Inrush current (capacitive) | 100 A |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 |
| Ambient temperature | terminal side -20 °C ... +100 °C actuating side -20 °C ... +55 °C |
| Flammability | UL 94 V-0 UL 94 V-2 (in the versions in white) |
| Glow wire test temperature | 850 °C |
| Material actuator housing terminals | PA PA silver plated |
| Plug force of the terminals | ≤ 80 N |
| Approval marks | |
| Suitable for appliances of protection class II | |



SERIES 1858 - MINIATURE DOUBLE-POLE ROCKER SWITCHES

TO 10 (4) A 250 V AC 1E4

|  double-pole | Actuator color / printing | Housing color | 10 (4) A 250 V AC 1E4 | 6 (4) A 250 V AC 5E4 | 12 A 250 V AC 1/2 HP | 12 A 125 V AC 1/3 HP | Terminal type | Terminal description | Contact distance (mm) | Contact material | EN 60335 cap. 30 conform "G" | Miscellaneous | Stock version |
|--|---------------------------|---------------|-----------------------|-----------------------|-----------------------|-----------------------|---------------|----------------------|-----------------------|------------------|------------------------------|----------------------|-----------------------|
| | ON / OFF switch (DPST) | | | | | | | | | | | | |
| 1858.0103 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | | ≈ 3 | Ag | <input type="radio"/> | | |
| 1858.0104 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | | ≈ 3 | Ag | <input type="radio"/> | | |
| 1858.1102 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≈ 3 | Ag | <input type="radio"/> | | <input type="radio"/> |
| 1858.1103 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≈ 3 | Ag | <input type="radio"/> | | <input type="radio"/> |
| 1858.1104 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≈ 3 | Ag | <input type="radio"/> | | |
| 1858.1105 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≈ 3 | Ag | | terminal spacing 10 | |
| 1858.2202 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | | ≈ 3 | Ag | <input type="radio"/> | | <input type="radio"/> |
| 1858.2204 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | | ≈ 3 | Ag | <input type="radio"/> | | |
| 1858.4202 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | | ≈ 3 | Ag | <input type="radio"/> | | <input type="radio"/> |
| 1858.4205 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | | ≈ 3 | Ag | <input type="radio"/> | | <input type="radio"/> |
| 1858.9202 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | | ≈ 3 | Ag | <input type="radio"/> | single-pole occupied | |

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE




SERIES 1858 - MINIATURE DOUBLE-POLE ROCKER SWITCHES

TO 10 (4) A 250 V AC 1E4




Basic type 1858
double-pole




X = Wall thickness


| x | y | z |
|---------------|----------------------|----------------------|
| 0.75 ... 1.25 | 19.2 ^{-0.1} | 12.9 ^{+0.1} |
| 1.25 ... 2 | 19.4 ^{-0.1} | 12.9 ^{+0.1} |
| 2 ... 3 | 19.8 ^{-0.1} | 12.9 ^{+0.1} |

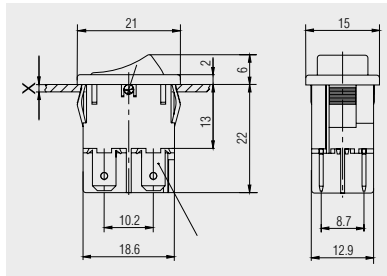


Quick-connect terminal 4.8 x 0.8

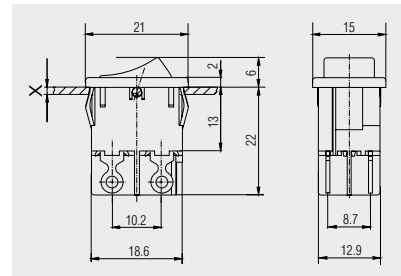


Solder terminal

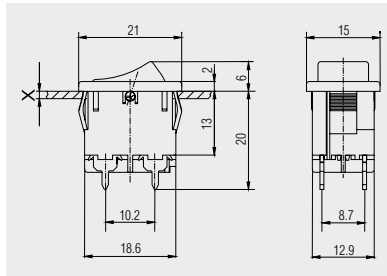

PCB terminal

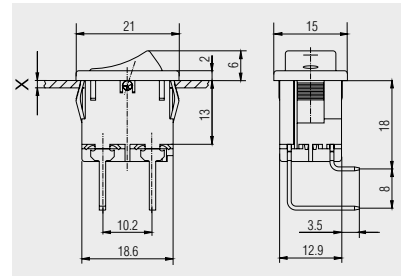


PCB terminal angled to
terminal side 1

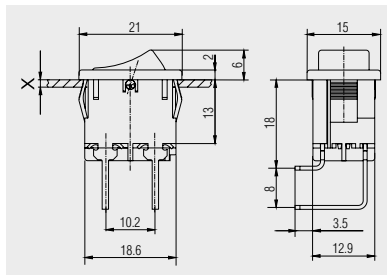

PCB terminal angled to
terminal side 2



Protection cap
203.089.011

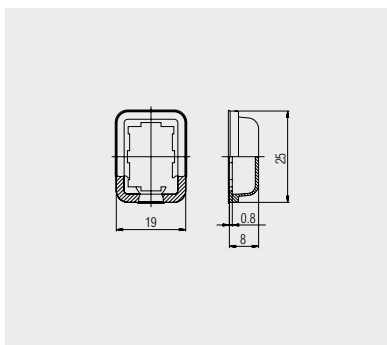

Transparent PVC-protection cap.
Serves as dust and water protection
of the actuation side.



SERIES 1941 - SINGLE-POLE ROCKER SWITCHES IP 50

TO 12 (8) A 250 V AC 1E4



PRODUCT FEATURES

- Single-pole rocker switch
- High dust protection with IP 50
- 100 million times proven switching principle
- Appliance cut-out same as basic type 1801

ON REQUEST

- Other colors
- Other printing variants
- Other terminal variants
- PVC - protection cap
- With approval mark


| | |
|--|--|
| Mechanical life endurance | 1E5 5E4 (normally open contact) |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 |
| Ambient temperature | terminal side -20 °C ... +100 °C ... +125 °C (product-dependent) actuating side -20 °C ... +55 °C |
| Flammability | UL 94 V-2 |
| Glow wire test temperature | 850 °C |
| Material actuator housing | PA PA / PA glass fiber-reinforced |
| Plug force of the terminals | ≤ 80 N |
| Suitable for appliances of protection class II | |



SERIES 1941 - SINGLE-POLE ROCKER SWITCHES IP 50


TO 12 (8) A 250 V AC 1E4

| single-pole | Actuator color / printing | | 12 (8) A 250 V AC 1E4 | 8 (8) A 250 V AC 5E4 | 6 (4) A 250 V AC 5E4 | 6 (2) A 250 V AC 5E4 | Terminal type | Terminal description | Contact distance (mm) | Contact material | Inrush current (capacitive) (A) | Miscellaneous | Stock version |
|-------------------------------------|---------------------------|--|-----------------------|----------------------|----------------------|----------------------|---------------|----------------------|-----------------------|------------------|---------------------------------|-----------------------|---------------|
| ON / OFF switch (SPST) | | | | | | | | | | | | | |
| 1941.1102 | | | | | | | | 4.8 | ≥ 3 | Ag | 50 | without approval mark | |
| 1941.1103 | | | | | | | | 4.8 | ≥ 3 | Ag | 50 | 0 at On-position | |
| 1941.1105 | | | | | | | | 4.8 | ≥ 3 | Ag | 50 | | |
| Normally open contact (SPNO) | | | | | | | | | | | | | |
| 1941.1203 | | | | | | | | 4.8 | ≥ 3 | Ag | | 0 at On-position | |

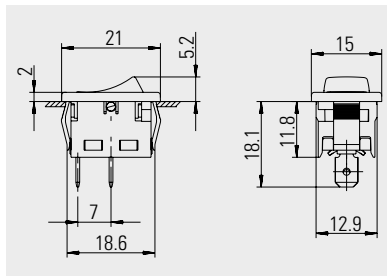

Basic type 1941 single-pole


Quick-connect terminal 4.8 x 0.8



X = Wall thickness

| x | y | z |
|---------------|----------------------|----------------------|
| 0.75 ... 1.25 | 19.2 ^{-0.1} | 12.9 ^{+0.1} |
| 1.25 ... 2 | 19.4 ^{-0.1} | 12.9 ^{+0.1} |

Housing with internal meander and a hole underneath the snap-on mechanism for IP 50. Switching system is dust- and waterproof.

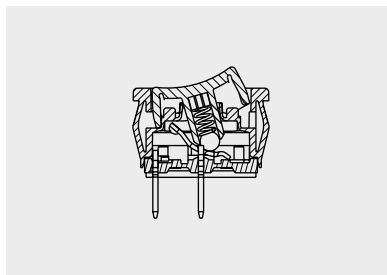

Sectional drawing

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH N DRIVE



SERIES 1550 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 16 (4) A 250 V AC



PRODUCT FEATURES

- Inrush currents (capacitive) up to 100 A
- Two housing variants (with flange or lower lying)
- With mechanical forced opening
- Illuminated window with lens effect

ON REQUEST



- Other colors
- Other rocker labelings
- Other lamp variants
- Conformity IEC 60065 chap. 14.6
- Special rockers
- Cable assembly

| | |
|--|--|
| Mechanical life endurance | 5E4 |
| Inrush current (capacitive) | 100 A |
| Contact distance | ≥ 3 mm |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 |
| Ambient temperature | terminal side -20 °C ... +100 °C actuating side -20 °C ... +55 °C |
| Flammability | UL 94 V-2 UL 94 V-0 (product-dependent) |
| Glow wire test temperature | 850 °C |
| Material actuator housing | PA PA |
| Plug force of the terminals | ≤ 80 N |
| Approval marks | |
| Suitable for appliances of protection class II | |



SERIES 1550 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 16 (4) A 250 V AC


|  single-pole  | | Lighting voltage (V) | Actuator color / printing | Housing color | 7 A 250 V AC 5E4 | 16 (4) A 250 V AC 5E4 | 16 (4) A 250 V AC 1E4 | 10 (4) A 250 V AC 5E4 | 10 (4) A 250 V AC 25E3 | 10 A 12 V DC | 20 mA 250 V AC 5E4 | 20 A 250 V AC 2 HP | 20 A 125 V AC 1 HP | 16 A 250 V AC 2 HP | 16 A 125 V AC 1 HP | Terminal type | Terminal description | Contact material | EN 60335 cap. 30 conform "G" | Miscellaneous | Stock version |
|---|-----|----------------------|---------------------------|---------------|------------------|-----------------------|-----------------------|-----------------------|------------------------|--------------|--------------------|--------------------|--------------------|--------------------|--------------------|---------------|----------------------|------------------|------------------------------|---|---------------|
| ON / OFF switch (SPST) | | | | | | | | | | | | | | | | | | | | | |
| 1550.3102 | 230 | | | | | ○ | ○ | | | | | | | ○ | | U | 6.3 | Ag | | | |
| 1550.3609 | 12 | | | | | | | | ○ | | | | | | | U | 6.3 | Ag | | lower lying flange | |
| 1551.3102 | | | | | | ○ | ○ | | | | | | | ○ | ○ | U | 6.3 | Ag | ○ | | ○ |
| 1551.3103 | | | | | | ○ | ○ | | | | | | | ○ | ○ | U | 6.3 | Ag | | | |
| 1551.3106 | | | | | | ○ | ○ | | | | | | | ○ | ○ | U | 6.3 | Ag | | | |
| 1551.2654 | | | | | | | | | | ○ | | | | | | U | | Au | | approvals KEMA lower lying flange | |
| Normally closed contact (SPNC) | | | | | | | | | | | | | | | | | | | | | |
| 1581.1303 | | | | | ○ | | | | | | | | | ○ | ○ | U | 6.3 | Ag | ○ | increased life endurance at a high electrical rating | |
| 1551.1303 | | | | | | ○ | ○ | | | | | | | ○ | ○ | U | 6.3 | Ag | | | |
| Normally open contact (SPNO) | | | | | | | | | | | | | | | | | | | | | |
| 1551.3202 | | | | | | ○ | ○ | | | | | | | ○ | ○ | U | 6.3 | Ag | | | ○ |
| 1551.3702 | | | | | | ○ | ○ | | | | | | | ○ | ○ | U | 6.3 | Ag | | lower lying flange | |

ROCKERSWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SMP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH N' DRIVE




SERIES 1550 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 16 (4) A 250 V AC

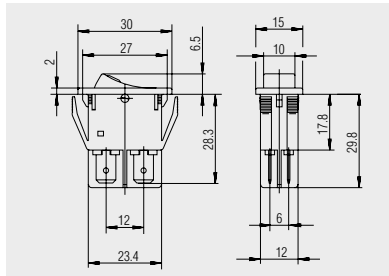


Basic types 1550 and 1555
single and double-pole

Quick-connect terminal 6.3 x 0.8




X = Wall thickness

| x | y | z |
|-------------|----------------------|----------------------|
| 0.8 ... 5.0 | 27.2 ^{+0.1} | 12.2 ^{+0.2} |

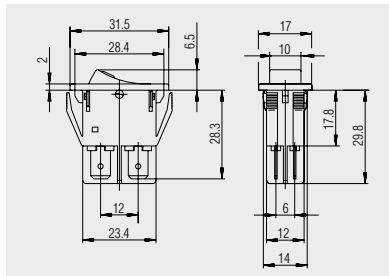

1555.8104
double-pole

Quick-connect terminal 6.3 x 0.8
cover frame 31.5 x 17 mm



X = Wall thickness

| x | y | z |
|-------------|----------------------|--------------------|
| 0.8 ... 5.0 | 28.6 ^{+0.1} | 14 ^{+0.2} |

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH N' DRIVE




SERIES 1550 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES


TO 16 (4) A 250 V AC




Basic types 1550 and 1555
lower lying flange
single and double-pole

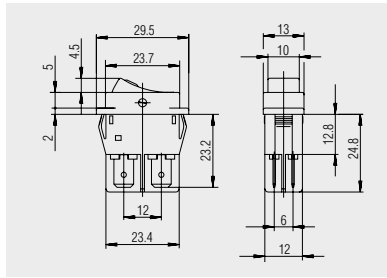

Quick-connect terminal 6.3 x 0.8

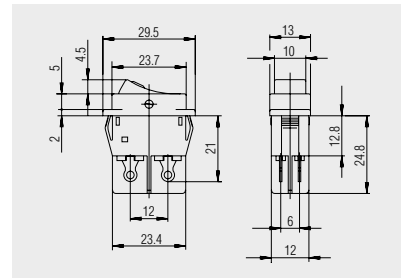

Solder terminal




X = Wall thickness


| x | y | z |
|---------------|----------------------|----------------------|
| 0.75 ... 1.25 | 26.2 ^{-0.1} | 12.4 ^{+0.1} |
| 2 ... 3 | 26.8 ^{-0.1} | 12.4 ^{+0.1} |
| 2 ... 3 | 26.8 ^{-0.1} | 12.4 ^{+0.1} |
| 1.25 ... 2 | 26.4 ^{-0.1} | 12.4 ^{+0.1} |




Basic type 1551 and 1552
single and double-pole

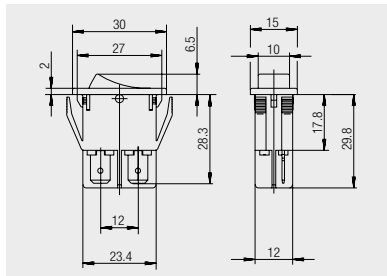

Quick-connect terminal 6.3 x 0.8

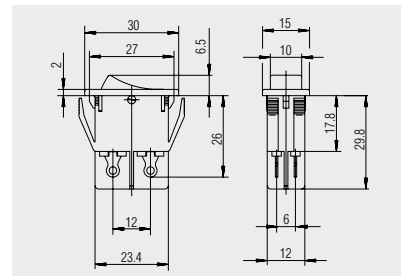

Solder terminal



X = Wall thickness

| x | y | z |
|-------------|----------------------|----------------------|
| 0.8 ... 5.0 | 27.2 ^{+0.1} | 12.2 ^{+0.2} |




SERIES 1550 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 16 (4) A 250 V AC




Basic types 1551 and 1552
lower lying flange
single and double-pole




X = Wall thickness


| x | y | z |
|---------------|----------------------|----------------------|
| 0.75 ... 1.25 | 26.2 ^{-0.1} | 12.4 ^{+0.1} |
| 1.25 ... 2 | 26.4 ^{-0.1} | 12.4 ^{+0.1} |
| 2 ... 3 | 26.8 ^{-0.1} | 12.4 ^{+0.1} |

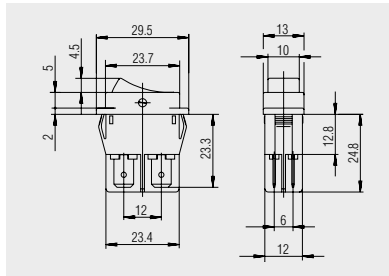


Quick-connect terminal 6.3 x 0.8

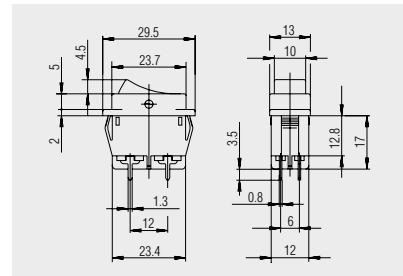

PCB terminal

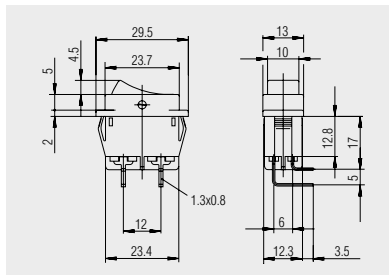


PCB terminal angled

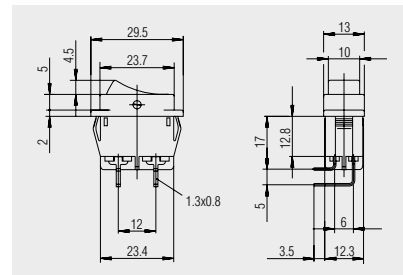

PCB terminal angled mirror-inverted



Dummy piece
203.103.013

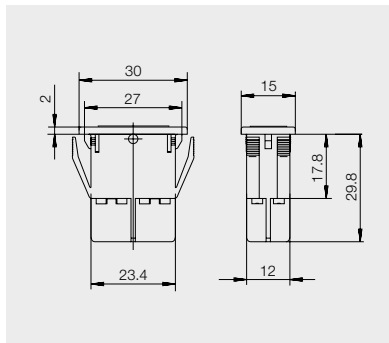

Dummy piece for series 1550 made of PA



SERIES 1830 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 20 (4) A 250 V AC



PRODUCT FEATURES

- 100 million times proven switching principle
- mechanical life endurance up to 1 million switching cycles
- Large variety
- Variants with IP 67 or dust protection insert
- Two housing variants
- Actuating characteristic
- Illuminated and non-illuminated variants
- Approval for 400 V (product-dependent)

ON REQUEST


- Other colors
- Other rocker printings
- Other lamp variants
- Snap-on customized actuators
- Cable assembly

| | |
|--|---|
| Mechanical life endurance | 10E4 5E4 (basic type 1839) 1E6 (product-dependent) |
| Inrush current (capacitive) | 120 A / 50 A (contact pair Ag / Cu and basic type 1834) |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 / IP 67 (product-dependent) |
| Ambient temperature | terminal side -20 °C ... +105 °C / ... +85 °C / ... +100 °C (product-dependent) actuating side -20 °C ... +55 °C |
| Flammability | UL 94 V-2 UL 94 V-0 (product-dependent) |
| Glow wire test temperature | 850 °C |
| Material actuator housing terminals | PA / PC (product-dependent) PA silver plated / tinned (product-dependent) |
| Plug force of the terminals | ≤ 80 N |
| Approval marks | |
| Suitable for appliances of protection class II | |



SERIES 1830 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 20 (4) A 250 V AC


|  single-pole | | ON / OFF switch (SPST) | | | | | | | | | | | | | |
|--|--|------------------------|-----------|-----------|-----------|-----------|-----------|---------------------------------|---------------------------------|--|--|-----------|--------------------|-----------|-----------|
| Lighting voltage (V) | | 1830.3112 | 1830.3118 | 1830.0102 | 1831.0114 | 1831.3312 | 1831.3313 | 1831.3606 | 1831.3607 | 1831.3815 | 1831.3816 | 1831.3933 | 1831.8112 | 1831.3311 | 1831.1107 |
| Actuator color / printing | | | | | | | | | | | | | | | |
| Housing color | | | | | | | | | | | | | | | |
| 20 (4) A 250 V AC 1E4 | | o | o | | o | o | o | o | o | o | o | o | o | | |
| 20 (4) A 250 V AC | | | | | | | | | | | | | | o | |
| 16 (4) A 250 V AC 1E4 | | | | | | | | | | | | | | | |
| 10 (8) A 400 V AC 5E4 | | | | | | | | | | | | | | | |
| 10 (8) A 250 V AC 5E4 | | o | o | | o | o | o | o | o | o | o | o | o | o | |
| 10 (4) A 250 V AC 1E4 | | | | o | | | | | | | | | | | o |
| 10 A 12 V DC | | | | | | | | | | | | | | | |
| 6 (4) A 250 V AC 5E4 | | | | o | | | | | | | | | | | o |
| 6 (4) A 250 V AC 1E4 | | | | | | | | | | | | | | | |
| 6 (4) A 250 V AC | | | | | | | | | | | | | | | |
| 4 (2) A 250 V AC 1E4 | | | | | | | | | | | | | | | |
| 30 mA 12 V DC | | | | | | | | | | | | | | | |
| 16 A 250 V AC 1 HP | | o | o | | o | o | o | o | o | o | o | o | o | o | |
| 16 A 250 V AC 1/2 HP | | | | | | | | | | | | | | | |
| 16 A 125 V AC 1/3 HP | | | | | o | o | o | o | o | o | o | o | o | o | |
| 16 A 125 V AC 1/4 HP | | | | | | | | | | | | | | | |
| 6 A 250 V AC 1/2 HP | | | | o | | | | | | | | | | | o |
| 6 A 125 V AC 1/4 HP | | | | | | | | | | | | | | | o |
| 6 A 125 - 250 V AC 1/8 HP | | | | | | | | | | | | | | | |
| 6 A 125 V AC 1/10 HP | | | | | | | | | | | | | | | |
| 4 A 250 V AC 1/10 HP | | | | | | | | | | | | | | | |
| Terminal type | | | | | | | | | | | | | | | |
| Terminal description | | 6.3 | 6.3 | | | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 4.8 |
| Contact distance (mm) | | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 |
| Contact material | | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag |
| EN 60335 cap. 30 conform "G" | | | | | | | | o | o | | | | | o | |
| Miscellaneous | | | | | | | | housing with 2 separating gates | housing with 2 separating gates | 1E6 mechanical life endurance IP 67 | 1E6 mechanical life endurance IP 67 | | lower lying flange | | |
| Stock version | | o | o | | | o | o | | | | | | o | o | o |

ROCKERSWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH-N-DRAW



SERIES 1830 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 20 (4) A 250 V AC

| <div style="text-align: center;">  <p>single-pole</p> </div> | Normally open switch (SPNO) | | | | Changeover switch (SPDT) | | | Changeover switch with OFF position in the center (SPDT - Center OFF) | | | | | |
|---|-----------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|---|-------------------------------|--------------------------|--------------------------|--------------------------|-----------------------------|
| | 1831.1202 | 1831.3402 | 1831.8202 | 1831.1253 | 1833.3312 | 1833.1102 | 1833.3307 | 1838.0305 | 1838.3901 | 1838.1402 | 1838.1502 | 1838.1509 | 1838.1602 |
| Lighting voltage (V) | | | | | | | | | | | | | |
| Actuator color / printing | | | | | | | | | | | | | |
| Housing color | | | | | | | | | | | | | |
| 20 (4) A 250 V AC 1E4 | | | | | | | | | | | | | |
| 20 (4) A 250 V AC | | | | | | | | | | | | | |
| 16 (4) A 250 V AC 1E4 | | | | | <input type="checkbox"/> | | | <input type="checkbox"/> | <input type="checkbox"/> | | | | |
| 10 (8) A 400 V AC 5E4 | | | | | | | | | | | | | |
| 10 (8) A 250 V AC 5E4 | | | | | | | | | | | | | |
| 10 (4) A 250 V AC 1E4 | | | | | | | <input type="checkbox"/> | | | | | | |
| 10 A 12 V DC | | | | | | | | | | | | | |
| 6 (4) A 250 V AC 5E4 | | | | | | | <input type="checkbox"/> | | | | | | |
| 6 (4) A 250 V AC 1E4 | | | | | | | | | | <input type="checkbox"/> | | | |
| 6 (4) A 250 V AC | | | | | | | | | | | <input type="checkbox"/> | | |
| 4 (2) A 250 V AC 1E4 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | | | | | | | | | |
| 30 mA 12 V DC | | | | <input type="checkbox"/> | | | | | | | | | |
| 16 A 250 V AC 1 HP | | | | | | <input type="checkbox"/> | | | <input type="checkbox"/> | | | | |
| 16 A 250 V AC 1/2 HP | | | | | | | | | | <input type="checkbox"/> | | | |
| 16 A 125 V AC 1/3 HP | | | | | | <input type="checkbox"/> | | | | | | | |
| 16 A 125 V AC 1/4 HP | | | | | | | | | | | | | |
| 6 A 250 V AC 1/2 HP | | | | | | | <input type="checkbox"/> | | | | | | |
| 6 A 125 V AC 1/4 HP | | | | | | | | | | | <input type="checkbox"/> | | |
| 6 A 125 - 250 V AC 1/8 HP | | | | | | | | | | <input type="checkbox"/> | | <input type="checkbox"/> | |
| 6 A 125 V AC 1/10 HP | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | | | | | | | | | |
| 4 A 250 V AC 1/10 HP | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | | | | | | | | | |
| Terminal type | | | | | | | | | | | | | |
| Terminal description | 4.8 | 6.3 | 6.3 | 4.8 | 6.3 | 4.8 | 6.3 | | 6.3 | 4.8 | 4.8 | 4.8 | 4.8 |
| Contact distance (mm) | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 |
| Contact material | Ag | Ag | Ag | Au | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag |
| EN 60335 cap. 30 conform "G" | | | | | | | <input type="checkbox"/> | | | | | | |
| Miscellaneous | | | lower lying flange | | | | | | momentary function both sides | | | | momentary function one side |
| Stock version | <input type="checkbox"/> | <input type="checkbox"/> | | | | | | | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SWAP-ACTION SWITCHES

MIKRO-SIGNALSCHALTER

SENSORS

ECO

PUSH'DRIVE



SERIES 1830 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 20 (4) A 250 V AC


| single-pole | | Changeover switch with OFF position in the center (SPDT - Center OFF) | | | | Changeover switch (SPDT momentary) | | |
|------------------------------|--|---|--|-------------------------------|-----------|--|-----------|-----------|
| | | 1838.4307 | 1838.8302 | 1838.3402 | 1838.3502 | 1835.3902 | 1833.1202 | 1833.3402 |
| Lighting voltage (V) | | | | | | 230 | | |
| Actuator color / printing | | | | | | | | |
| Housing color | | | | | | | | |
| 20 (4) A 250 V AC 1E4 | | | | | | | | |
| 20 (4) A 250 V AC | | | | | | | | |
| 16 (4) A 250 V AC 1E4 | | | | | | | | |
| 10 (8) A 400 V AC 5E4 | | | | | | | | |
| 10 (8) A 250 V AC 5E4 | | | | | | | | |
| 10 (4) A 250 V AC 1E4 | | | | | | | | |
| 10 A 12 V DC | | | | | | | | |
| 6 (4) A 250 V AC 5E4 | | | | | | | | |
| 6 (4) A 250 V AC 1E4 | | ○ | ○ | | | | | |
| 6 (4) A 250 V AC | | | | ○ | ○ | | | |
| 4 (2) A 250 V AC 1E4 | | | | | | ○ | ○ | ○ |
| 30 mA 12 V DC | | | | | | | | |
| 16 A 250 V AC 1 HP | | | | | | | | |
| 16 A 250 V AC 1/2 HP | | | | | | | | |
| 16 A 125 V AC 1/3 HP | | | | | | | | |
| 16 A 125 V AC 1/4 HP | | | | | | | | |
| 6 A 250 V AC 1/2 HP | | | | | | | | |
| 6 A 125 V AC 1/4 HP | | | | | | | | |
| 6 A 125 - 250 V AC 1/8 HP | | ○ | ○ | ○ | ○ | | | |
| 6 A 125 V AC 1/10 HP | | | | | | ○ | ○ | ○ |
| 4 A 250 V AC 1/10 HP | | | | | | ○ | ○ | ○ |
| Terminal type | | | | | | | | |
| Terminal description | | 2.8 | 6.3 | 6.3 | 6.3 | 6.3 | 4.8 | 6.3 |
| Contact distance (mm) | | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 |
| Contact material | | Ag | Ag | Ag | Ag | Ag | Ag | Ag |
| EN 60335 cap. 30 conform "G" | | | | | | | | |
| Miscellaneous | | momentary function one side | momentary function both sides lower lying flange | momentary function both sides | | external lamp connection two-pole size | | |
| Stock version | | | | ○ | ○ | | | |

ROCKER SWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SMP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH IN DRIVE



SERIES 1830 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES









































TO 20 (4) A 250 V AC

|  double-pole | | ON / OFF switch (DPST) | | | | | | | | | | | | | | | | | |
|--|--|------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Lighting voltage (V) | | 400 | 230 | 230 | 230 | 230 | 230 | 230 | 230 | 230 | 230 | 115 - 230 | 12 | | | | | | |
| Actuator color / printing | | | | | | | | | | | | | | | | | | | |
| Housing color | | | | | | | | | | | | | | | | | | | |
| 20 (4) A 250 V AC 1E4 | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |
| 20 (4) A 250 V AC | | | | | | | | | | | | | | | | | | | |
| 16 (4) A 250 V AC 1E4 | | | | | | | | | | | | | | | | | | | |
| 10 (8) A 400 V AC 5E4 | | <input type="radio"/> | | | | | | | | | | | | | | | | | |
| 10 (8) A 250 V AC 5E4 | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |
| 10 (4) A 250 V AC 1E4 | | | | | | | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | | | | | | | |
| 10 A 12 V DC | | | | | | | | | | | | | <input type="radio"/> | | | | | | |
| 6 (4) A 250 V AC 5E4 | | | | | | | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | | | | | | | |
| 6 (4) A 250 V AC 1E4 | | | | | | | | | | | | | | | | | | | |
| 6 (4) A 250 V AC | | | | | | | | | | | | | | | | | | | |
| 4 (2) A 250 V AC 1E4 | | | | | | | | | | | | | | | | | | | |
| 30 mA 12 V DC | | | | | | | | | | | | | | | | | | | |
| 16 A 250 V AC 1 HP | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | | | | <input type="radio"/> | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |
| 16 A 250 V AC 1/2 HP | | | | | | | | | | | | | | | | | | | |
| 16 A 125 V AC 1/3 HP | | | | | | | | | | | | | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |
| 16 A 125 V AC 1/4 HP | | | | | | | | | | | | | | | | | | | |
| 6 A 250 V AC 1/2 HP | | | | | | | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | | | | | | | |
| 6 A 125 V AC 1/4 HP | | | | | | | | | | | | | | | | | | | |
| 6 A 125 - 250 V AC 1/8 HP | | | | | | | | | | | | | | | | | | | |
| 6 A 125 V AC 1/10 HP | | | | | | | | | | | | | | | | | | | |
| 4 A 250 V AC 1/10 HP | | | | | | | | | | | | | | | | | | | |
| Terminal type | | | | | | | | | | | | | | | | | | | |
| Terminal description | | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 4.8 | 6.3 | 6.3 | 6.3 | 6.3 |
| Contact distance (mm) | | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 |
| Contact material | | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag |
| EN 60335 cap. 30 conform "G" | | | | | | | | | | | | | | | | | | | <input type="radio"/> |
| Miscellaneous | | cover frame 33.2 long | | | | | | PCB holder 248.103.011 mounted lower lying flange | | | | | | | cover frame 33.2 long | | | | |
| Stock version | | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |



SERIES 1830 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 20 (4) A 250 V AC

|  double-pole | | ON / OFF switch (DPST) | | | | | | | | Normally open contact (DPNO) | | Changeover switch (DPDT) | | | | | | | | | | | | | | | | | | | | |
|--|---|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------------|-----------------------|--------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|---------------------------|-----------------------|-----------------------|-----------------------|-----------------------|---|------------------|------------------------------|---------------|---------------|-----------------------|-----------------------|
| Lighting voltage (V) | Actuator color / printing | Housing color | 20 (4) A 250 V AC 1E4 | 20 (4) A 250 V AC | 16 (4) A 250 V AC 1E4 | 10 (8) A 400 V AC 5E4 | 10 (8) A 250 V AC 5E4 | 10 (4) A 250 V AC 1E4 | 10 A 12 V DC | 6 (4) A 250 V AC 5E4 | 6 (4) A 250 V AC 1E4 | 6 (4) A 250 V AC | 4 (2) A 250 V AC 1E4 | 30 mA 12 V DC | 16 A 250 V AC 1 HP | 16 A 250 V AC 1/2 HP | 16 A 125 V AC 1/3 HP | 16 A 125 V AC 1/4 HP | 6 A 250 V AC 1/2 HP | 6 A 125 V AC 1/4 HP | 6 A 125 - 250 V AC 1/8 HP | 6 A 125 V AC 1/10 HP | 4 A 250 V AC 1/10 HP | Terminal type | Terminal description | Contact distance (mm) | Contact material | EN 60335 cap. 30 conform "G" | Miscellaneous | Stock version | | |
| |  |  | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |  | 6.3 | ≥ 3 | Ag | | cover frame 33.2 long | |
| |  |  | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |  | 4.8 | ≥ 3 | Ag | | lower lying flange | |
| |  |  | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |  | | ≥ 3 | Ag | | lower lying flange | |
| |  |  | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |  | 6.3 | ≥ 3 | Ag | | lower lying flange | |
| |  |  | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |  | | ≥ 3 | Ag | | lower lying flange | |
| |  |  | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |  | | ≥ 3 | Ag | | dust protection inlay | |
| |  |  | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |  | 4.8 | ≥ 3 | Ag | | | <input type="radio"/> |
| |  |  | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |  | 6.3 | ≥ 3 | Ag | | | <input type="radio"/> |
| |  |  | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |  | | ≥ 3 | Ag | | lower lying flange | |
| |  |  | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |  | 6.3 | ≥ 3 | Ag | | | <input type="radio"/> |
| |  |  | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |  | 6.3 | ≥ 3 | Ag | | | <input type="radio"/> |
| |  |  | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |  | 6.3 | ≥ 3 | Ag | | | <input type="radio"/> |
| |  |  | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |  | 6.3 | ≥ 3 | Ag | | | <input type="radio"/> |

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH-IN DRIVE



SERIES 1830 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 20 (4) A 250 V AC

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES


SNAP-ACTION SWITCHES

MIKRO-SIGNALSCHALTER

SENSORS

ECO


PUSH'DRIVE

|  <p>double-pole</p> | | Changeover switch (DPDT) | | | | | Changeover switch with OFF position in the center (DPDT - Center Off) | | | | | | | | | |
|--|--|--------------------------|-----------|-----------|-----------------------|--------------------|---|-------------------------------|-------------------------------|---|-----------|-----------|-----------------------|-----------------------------|-----------|--|
| Lighting voltage (V) | | 1834.1102 | 1834.3302 | 1834.3309 | 1834.3603 | 1834.6103 | 1839.3512 | 1839.1402 | 1839.1407 | 1839.1410 | 1839.1502 | 1839.1507 | 1839.1509 | 1839.1518 | 1839.1602 | |
| Actuator color / printing | | | | | | | | | | | | | | | | |
| Housing color | | | | | | | | | | | | | | | | |
| 20 (4) A 250 V AC 1E4 | | | | | | | | | | | | | | | | |
| 20 (4) A 250 V AC | | | | | | | | | | | | | | | | |
| 16 (4) A 250 V AC 1E4 | | | | | | | ○ | | | | | | | | | |
| 10 (8) A 400 V AC 5E4 | | | | | | | | | | | | | | | | |
| 10 (8) A 250 V AC 5E4 | | | | | | | | | | | | | | | | |
| 10 (4) A 250 V AC 1E4 | | ○ | ○ | ○ | ○ | ○ | | | | | | | | | | |
| 10 A 12 V DC | | | | | | | | | | | | | | | | |
| 6 (4) A 250 V AC 5E4 | | ○ | ○ | ○ | ○ | ○ | | | | | | | | | | |
| 6 (4) A 250 V AC 1E4 | | | | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |
| 6 (4) A 250 V AC | | | | | | | | | | | | | | | | |
| 4 (2) A 250 V AC 1E4 | | | | | | | | | | | | | | | | |
| 30 mA 12 V DC | | | | | | | | | | | | | | | | |
| 16 A 250 V AC 1 HP | | | | | | | | | | | | | | | | |
| 16 A 250 V AC 1/2 HP | | | | | | | ○ | | | | | | | | | |
| 16 A 125 V AC 1/3 HP | | | | | | | ○ | | | | | | | | | |
| 16 A 125 V AC 1/4 HP | | | | | | | | | | | | | | | | |
| 6 A 250 V AC 1/2 HP | | ○ | ○ | ○ | ○ | ○ | | | | | | | | | | |
| 6 A 125 V AC 1/4 HP | | ○ | ○ | ○ | ○ | ○ | | | | | | | | | | |
| 6 A 125 - 250 V AC 1/8 HP | | | | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |
| 6 A 125 V AC 1/10 HP | | | | | | | | | | | | | | | | |
| 4 A 250 V AC 1/10 HP | | | | | | | | | | | | | | | | |
| Terminal type | | | | | | | | | | | | | | | | |
| Terminal description | | 4.8 | 6.3 | 6.3 | 6.3 | 4.8 | 6.3 | 4.8 | 4.8 | 4.8 | 4.8 | 4.8 | 4.8 | 4.8 | 4.8 | |
| Contact distance (mm) | | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | |
| Contact material | | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | |
| EN 60335 cap. 30 conform "G" | | | | | ○ | | | | | | | | | | | |
| Miscellaneous | | | | | cover frame 33.2 long | lower lying flange | | momentary function both sides | momentary function both sides | dust protection inlay momentary function both sides | | | dust protection inlay | momentary function one side | | |
| Stock version | | | ○ | ○ | | | | ○ | ○ | | | ○ | | | | |



SERIES 1830 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 20 (4) A 250 V AC

















|  double-pole | | Changeover switch with OFF position in the center (DPDT - Center OFF) | | | | | | | Changeover switch (DPDT momentary) | |
|--|---------------------------|---|-----------|-----------|-----------------------------|--|---|-----------------------|------------------------------------|--|
| Lighting voltage (V) | Actuator color / printing | 1839.3402 | 1839.3502 | 1839.3503 | 1839.3602 | 1839.7304 | 1839.3352 | 1839.0105 | 1834.3402 | |
| Housing color | | Black | Black | Grey | Black | Black with I O R | Black | Black with I O II | Black | |
| 20 (4) A 250 V AC 1E4 | | | | | | | | | | |
| 20 (4) A 250 V AC | | | | | | | | | | |
| 16 (4) A 250 V AC 1E4 | | | | | | | | | | |
| 10 (8) A 400 V AC 5E4 | | | | | | | | | | |
| 10 (8) A 250 V AC 5E4 | | | | | | | | | | |
| 10 (4) A 250 V AC 1E4 | | | | | | | | | | |
| 10 A 12 V DC | | | | | | | | | | |
| 6 (4) A 250 V AC 5E4 | | | | | | | | | | |
| 6 (4) A 250 V AC 1E4 | | ○ | ○ | ○ | ○ | ○ | | | | |
| 6 (4) A 250 V AC | | | | | | | | | | |
| 4 (2) A 250 V AC 1E4 | | | | | | | | | ○ | |
| 30 mA 12 V DC | | | | | | | ○ | | | |
| 16 A 250 V AC 1 HP | | | | | | | | | | |
| 16 A 250 V AC 1/2 HP | | | | | | | | | | |
| 16 A 125 V AC 1/3 HP | | | | | | | | | | |
| 16 A 125 V AC 1/4 HP | | | | | | | | | | |
| 6 A 250 V AC 1/2 HP | | | | | | | | | | |
| 6 A 125 V AC 1/4 HP | | | | | | | | | | |
| 6 A 125 - 250 V AC 1/8 HP | | ○ | ○ | ○ | ○ | ○ | | | | |
| 6 A 125 V AC 1/10 HP | | | | | | | | | ○ | |
| 4 A 250 V AC 1/10 HP | | | | | | | | | ○ | |
| Terminal type | | | | | | | | | | |
| Terminal description | | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | |
| Contact distance (mm) | | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 3 | |
| Contact material | | Ag | Ag | Ag | Ag | Ag | Au | Ag | Ag | |
| EN 60335 cap. 30 conform "G" | | | | | | | | | | |
| Miscellaneous | | momentary function both sides | | | momentary function one side | dust protection inlay momentary function one side lower lying flange | cover frame 33.2 long momentary function both sides | dust protection inlay | | |
| Stock version | | ○ | ○ | | | | | | ○ | |

ROCKER SWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SNAP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH-N-DRAW



SERIES 1830 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 20 (4) A 250 V AC

| | Lamp | | | |
|-------------------------------------|---|---|---|---|
| | 1837.1118 | 1837.3102 | 1837.8102 | 1837.8108 |
| Lamp |  |  |  |  |
| Lighting voltage (V) | 230 | 230 | 230 | 230 |
| Actuator color / printing |  |  |  |  |
| Housing color |  |  |  |  |
| 20 (4) A 250 V AC 1E4 | | | | |
| 20 (4) A 250 V AC | | | | |
| 16 (4) A 250 V AC 1E4 | | | | |
| 10 (8) A 400 V AC 5E4 | | | | |
| 10 (8) A 250 V AC 5E4 | | | | |
| 10 (4) A 250 V AC 1E4 | | | | |
| 10 A 12 V DC | | | | |
| 6 (4) A 250 V AC 5E4 | | | | |
| 6 (4) A 250 V AC 1E4 | | | | |
| 6 (4) A 250 V AC | | | | |
| 4 (2) A 250 V AC 1E4 | | | | |
| 30 mA 12 V DC | | | | |
| 16 A 250 V AC 1 HP | | | | |
| 16 A 250 V AC 1/2 HP | | | | |
| 16 A 125 V AC 1/3 HP | | | | |
| 16 A 125 V AC 1/4 HP | | | | |
| 6 A 250 V AC 1/2 HP | | | | |
| 6 A 125 V AC 1/4 HP | | | | |
| 6 A 125 - 250 V AC 1/8 HP | | | | |
| 6 A 125 V AC 1/10 HP | | | | |
| 4 A 250 V AC 1/10 HP | | | | |
| Terminal type |  |  |  |  |
| Terminal description | 4.8 | 6.3 | 6.3 | 6.3 |
| Contact distance (mm) | | | | |
| Contact material | | | | |
| EN 60335 cap. 30 conform "G" | | | | |
| Miscellaneous | | | size basic type 1835 | size basic type 1835 |
| Stock version | | | | |

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MIKRO-SIGNALSCHALTER

SENSORS

ECO

PUSH'DRIVE




SERIES 1830 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES


TO 20 (4) A 250 V AC




Basic types 1830, 1831,
1833 and 1838
single-pole
illuminated / non-illuminated




| x | y | z |
|---------------|----------------------|--------------------|
| 0.75 ... 1.25 | 30 ^{-0.1} | 11 ^{+0.1} |
| 1.25 ... 2 | 30.2 ^{-0.1} | 11 ^{+0.1} |
| 2 ... 3 | 30.6 ^{-0.1} | 11 ^{+0.1} |

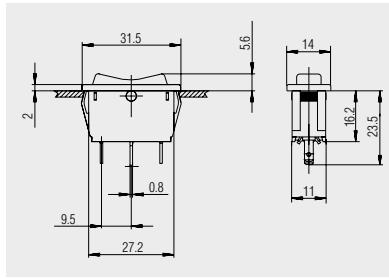


Quick-connect terminal 2.8 x 0.8
1838.4307

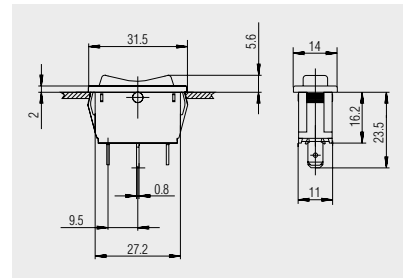


Quick-connect terminal 4.8 x 0.8
basic type 1838

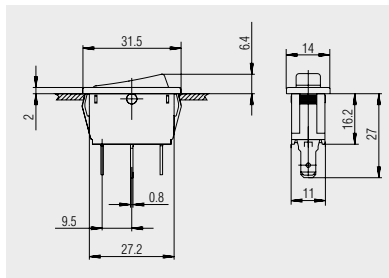


Quick-connect terminal 4.8 x 0.8
basic types 1830, 1831 and
1833

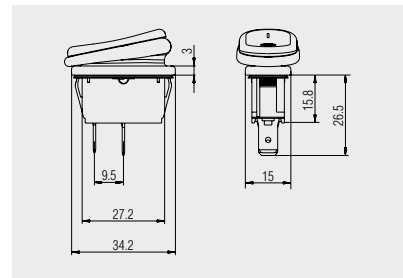


Quick-connect terminal 6.3 x 0.8
1831.3815

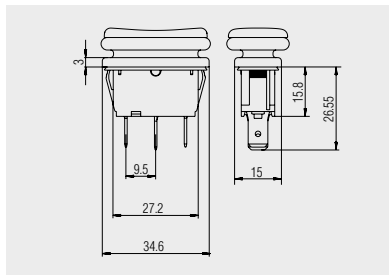


Quick-connect terminal 6.3 x 0.8
1838.3901

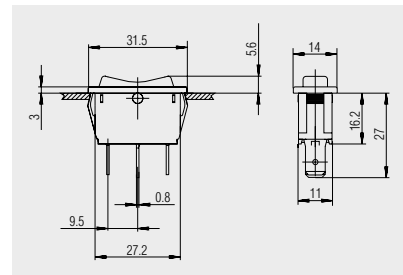


Quick-connect terminal 6.3 x 0.8
basic type 1838

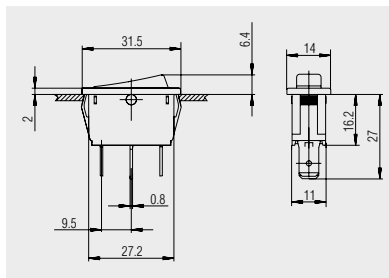

Quick-connect terminal 6.3 x 0.8
basic types 1831 and 1833

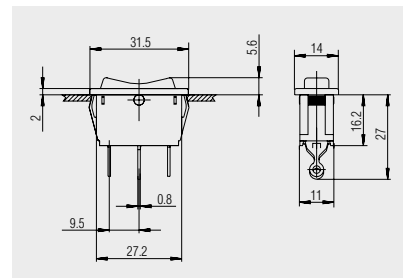

Solder terminal
basic type 1838

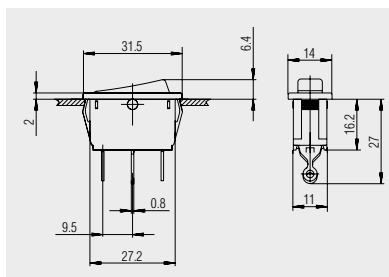

Solder terminal
basic types 1830 and 1831




SERIES 1830 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 20 (4) A 250 V AC




Basic types 1832, 1834,
1835 and 1839
double-pole
illuminated / non-illuminated




X = Wall thickness


| x | y | z |
|---------------|----------------------|--------------------|
| 0.75 ... 1.25 | 30 ^{-0.1} | 22 ^{+0.2} |
| 1.25 ... 2 | 30.2 ^{-0.1} | 22 ^{+0.2} |
| 2 ... 3 | 30.6 ^{-0.1} | 22 ^{+0.2} |

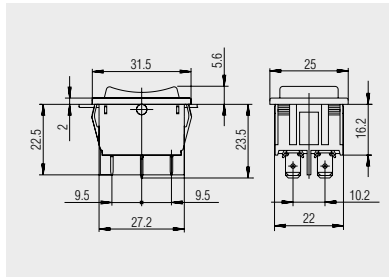


Quick-connect terminal 4.8 x 0.8

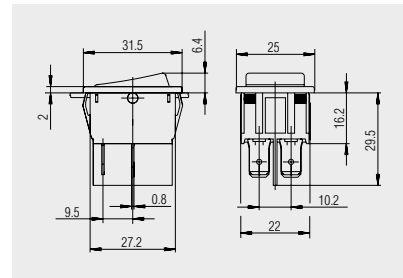


Quick-connect terminal 6.3 x 0.8 / 4.8
basic types 1832, 1834 and 1835

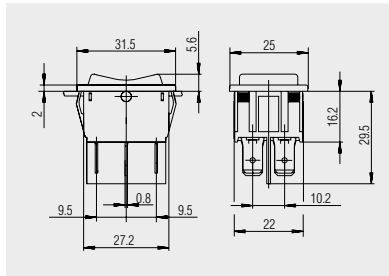


Quick-connect terminal 6.3 x 0.8
basic type 1839

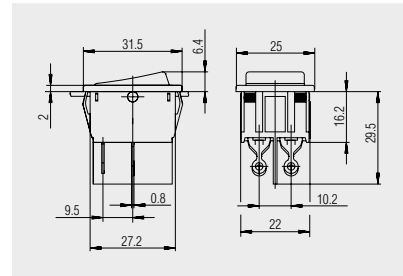

Solder terminal
basic type 1832

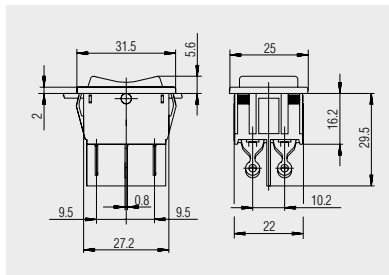

Solder terminal
basic type 1839

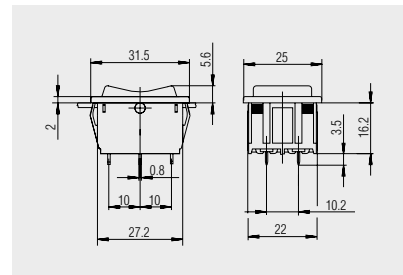

PCB terminal
basic type 1839




Basic types 1830, 1831 and 1833
single-pole, lower lying flange
illuminated / non-illuminated



X = Wall thickness

| x | y | z |
|---------------|----------------------|--------------------|
| 0.75 ... 1.25 | 30 ^{-0.1} | 11 ^{+0.1} |
| 1.25 ... 2 | 30.2 ^{-0.1} | 11 ^{+0.1} |
| 2 ... 3 | 30.6 ^{-0.1} | 11 ^{+0.1} |

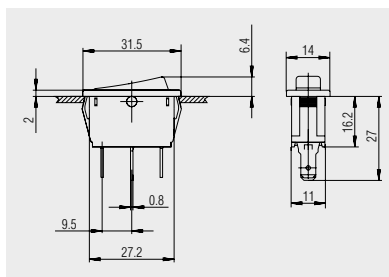

Quick-connect terminal 4.8 x 0.8
basic types 1830, 1831 and 1833




SERIES 1830 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 20 (4) A 250 V AC




Basic types 1832, 1834,
1835 and 1839
double-pole, lower lying flange
illuminated / non-illuminated




X = Wall thickness


| x | y | z |
|---------------|----------------------|--------------------|
| 0.75 ... 1.25 | 30 ^{-0.1} | 22 ^{+0.2} |
| 1.25 ... 2 | 30.2 ^{-0.1} | 22 ^{+0.2} |
| 2 ... 3 | 30.6 ^{-0.1} | 22 ^{+0.2} |

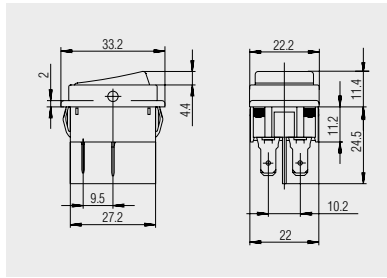


Quick-connect terminal 4.8 x 0.8
basic types 1832 and 1834

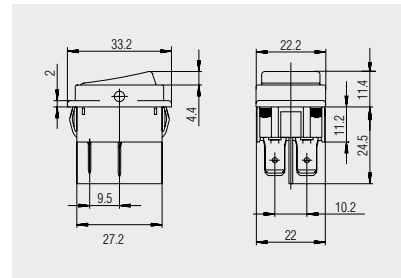


Quick-connect terminal 6.3 x 0.8
basic type 1832

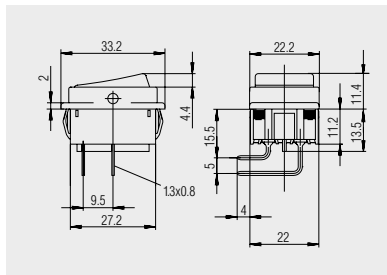

PCB terminal
angled
basic types 1832 and 1835

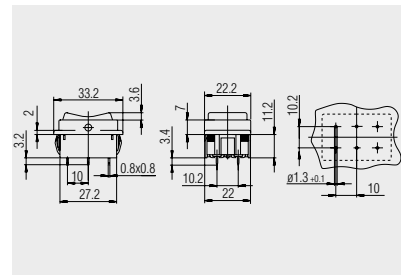

PCB terminal
basic type 1839

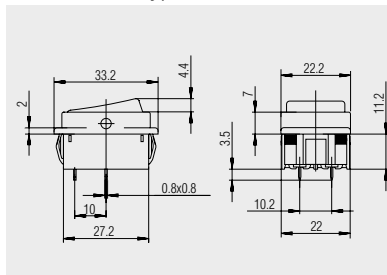

PCB terminal
basic types 1832 and 1835




SERIES 1830 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES


TO 20 (4) A 250 V AC




Basic type 1837 lamp
single and double-pole

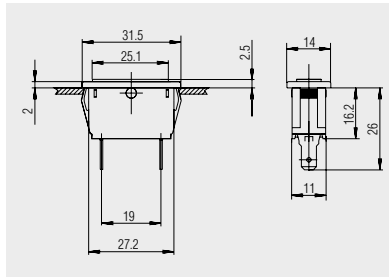


Quick-connect terminal 4.8 x 0.8
single-pole size

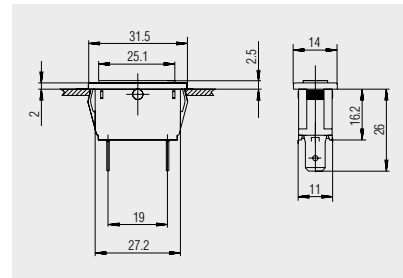


Quick-connect terminal 6.3 x 0.8
single-pole size



| x | y | z |
|---------------|----------------------|--------------------|
| 0.75 ... 1.25 | 30 ^{-0.1} | 22 ^{+0.1} |
| 1.25 ... 2 | 30.2 ^{-0.1} | 22 ^{+0.1} |
| 2 ... 3 | 30.6 ^{-0.1} | 22 ^{+0.1} |

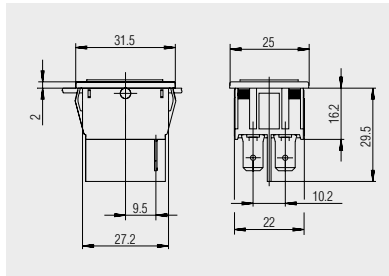


Quick-connect terminal 6.3 x 0.8
double-pole size

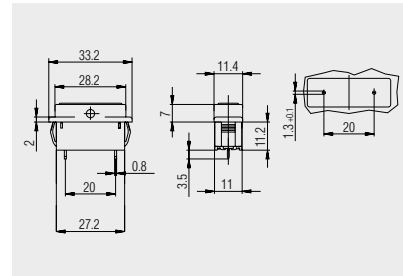

PCB terminal
lower lying flange
1837.2504




Protection cap
203.731.011

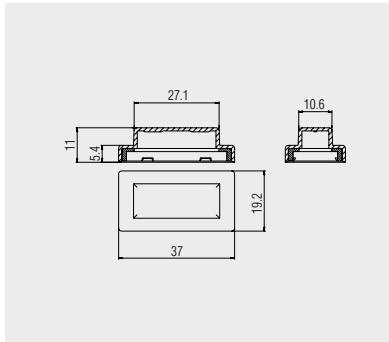

Transparent PVC-protection cap for single-pole switches of basic types 1830, 1831, 1833 and 1838. Serves as dust and water protection of the actuation side.



Protection cap
203.201.011

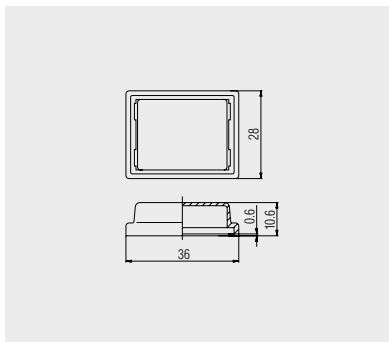

Transparent PVC-protection cap for double-pole switches of basic types 1832, 1834, 1835 and 1839 with frame length 33.2 mm. Serves as dust and water protection of the actuation side.




SERIES 1830 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 20 (4) A 250 V AC



Protection cap
203.078.011

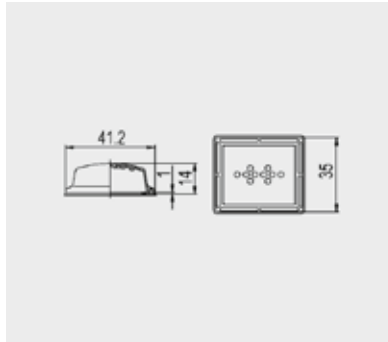

Transparent PVC-protection cap with burling. Serves as dust and water protection of the actuation side for double-pole basic types 1832, 1834, 1835 and 1839 with standard flange length 30 mm.



Dummy cap
203.145.051



Housing
217.132.031

Housing and dummy cap for double-pole size of basic types 1830, 1831, 1833, 1837 and 1838 made of PA black.

Housing and dummy cap must be assembled by the customer and make only sense in combination



Dummy cap
203.146.051



Housing
217.127.491

Housing and dummy cap for double-pole size of basic types 1832, 1834, 1835 and 1839 made of PA black.

Housing and dummy cap must be assembled by the customer and make only sense in combination



Block connector
217.954.011

Block connector for cable connection for the double-pole versions of the rocker switch series 1830 und 1930.

Used with the standard timer plug AMP 0-927 936-1



SERIES 1930 - DOUBLE-POLE ROCKER SWITCHES IP 65

TO 20 (4) A 250 V AC



PRODUCT FEATURES

- Illuminated and non-illuminated variants with various switching functions
- IP 65 with integrated gasket for high dust and water protection
- Inrush current (capacitive) up to 120 A
- Approval for 400 V
- 100 million times proven switching principle
- Modern rocker design
- High, flexible variety

ON REQUEST


- Other switching functions (e.g. Changeover switch)
- Other terminal types
- Other colors
- Other printing variants
- Other lamp variants
- Cable assembly

| | |
|---|--|
| Mechanical life endurance | 5E4 |
| Operating force | 3 - 8 N |
| Inrush current (capacitive) | 120 A 100 A (basic type 1939) 50 A (basic type 1934) |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 (terminal side), IP 65 (actuating side) |
| Ambient temperature | terminal side -30 °C ... +105 °C actuating side -30 °C ... +55 °C |
| Flammability | UL 94 V-2 UL 94 V-0 (housing and socket only) |
| Glow wire test temperature | 850 °C |
| Material | actuator housing terminals |
| | PC / TPU (bellows) PA silver plated |
| Plug force of the terminals | ≤ 80 N |
| Approval marks | |
| Suitable for appliances of protection class II | |



SERIES 1930 - DOUBLE-POLE ROCKER SWITCHES IP 65

TO 20 (4) A 250 V AC


|  double-pole | | ON / OFF switch (DPST) | | | | | | | | | | | | | | |
|--|--|------------------------|-----------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|----------------------------------|-----------------------|
| Lighting voltage (V) | | 1935.3135 | 1935.3137 | 1935.3112 | 1935.3113 | 1935.3114 | 1935.3118 | 1935.3119 | 1935.3129 | 1935.3134 | 1935.3128 | 1935.3131 | 1935.3138 | 1932.1113 | 1932.3112 | 1932.3113 |
| Actuator color / printing | | | | | | | | | | | | | | | | |
| Housing color | | | | | | | | | | | | | | | | |
| 20 (4) A 250 V AC 1E4 | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |
| 12 (4) A 250 V AC 1E4 | | | | | | | | | | | | | | | | |
| 10 (8) A 400 V AC 5E4 | | <input type="radio"/> | <input type="radio"/> | | | | | | | | | | | | | |
| 10 (8) A 250 V AC 5E4 | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |
| 10 A 12 V DC | | | | | | | | | | | | | <input type="radio"/> | | | |
| 6 (4) A 250 V AC 5E4 | | | | | | | | | | | | | | | | |
| 16 A 250 V AC 1 HP | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |
| 16 A 125 V AC 3/4 HP | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |
| 16 A 125 V AC 1/3 HP | | | | | | | | | | | | <input type="radio"/> | | | | |
| 14 A 250 V AC 3/4 HP | | | | | | | | | | | | | | | | |
| 14 A 250 V AC 1/2 HP | | | | | | | | | | | | | | | | |
| 14 A 125 V AC 1/3 HP | | | | | | | | | | | | | | | | |
| 14 A 125 V AC 1/4 HP | | | | | | | | | | | | | | | | |
| 12 A 250 V AC 1 HP | | | | | | | | | | | | | | | | |
| 12 A 125 V AC 1/2 HP | | | | | | | | | | | | | | | | |
| Terminal type | | | | | | | | | | | | | | | | |
| Terminal description | | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 4.8 | 6.3 | 6.3 |
| Contact distance (mm) | | Ag ≥ 3 | Ag ≥ 3 | Ag ≥ 3 | Ag ≥ 3 | Ag ≥ 3 | Ag ≥ 3 | Ag ≥ 3 | Ag ≥ 3 | Ag ≥ 3 | Ag ≥ 3 | Ag ≥ 3 | Ag ≥ 3 | Ag ≥ 3 | Ag ≥ 3 | Ag ≥ 3 |
| Contact material | | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag |
| EN 60335 cap. 30 conform "G" | | | | | | | | | | | | | | | | |
| Miscellaneous | | | | | | | | bellows anthracite | | | | | | | | |
| Stock version | | | | <input checked="" type="radio"/> | <input checked="" type="radio"/> | <input checked="" type="radio"/> | <input checked="" type="radio"/> | | | | | | | | <input checked="" type="radio"/> | |

ROCKER SWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SMP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH N' DRIVE



SERIES 1930 - DOUBLE-POLE ROCKER SWITCHES IP 65

TO 20 (4) A 250 V AC

|  double-pole | | ON / OFF switch (DPST) | | | | | | | | Normally closed contact (DPNC) | | Normally open contact (DPNO) | | | | | | | | | | | | |
|--|---------------------------|------------------------|-----------------------|-----------------------|-----------------------|-----------------------|--------------|----------------------|--------------------|--------------------------------|----------------------|------------------------------|----------------------|----------------------|----------------------|--------------------|----------------------|---------------|----------------------|-----------------------|------------------|------------------------------|----------------------|---------------|
| Lighting voltage (V) | Actuator color / printing | Housing color | 20 (4) A 250 V AC 1E4 | 12 (4) A 250 V AC 1E4 | 10 (8) A 400 V AC 5E4 | 10 (8) A 250 V AC 5E4 | 10 A 12 V DC | 6 (4) A 250 V AC 5E4 | 16 A 250 V AC 1 HP | 16 A 125 V AC 3/4 HP | 16 A 125 V AC 1/3 HP | 14 A 250 V AC 3/4 HP | 14 A 250 V AC 1/2 HP | 14 A 125 V AC 1/3 HP | 14 A 125 V AC 1/4 HP | 12 A 250 V AC 1 HP | 12 A 125 V AC 1/2 HP | Terminal type | Terminal description | Contact distance (mm) | Contact material | EN 60335 cap. 30 conform "G" | Miscellaneous | Stock version |
| | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | | | | U | 6.3 | ≥ 3 | Ag | ○ | | |
| | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | | | | U | 6.3 | ≥ 3 | Ag | ○ | bellows white | |
| | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | | | | U | 6.3 | ≥ 3 | Ag | ○ | bellows red | |
| | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | | | | U | 6.3 | ≥ 3 | Ag | ○ | single-pole occupied | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | U | 6.3 | ≥ 3 | Ag | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | |



SERIES 1930 - DOUBLE-POLE ROCKER SWITCHES IP 65

TO 20 (4) A 250 V AC

| | | Changeover switch (DPDT) | | | Changeover switch with OFF position in the center (DPDT - Center OFF) | | | | | | |
|------------------------------|--|--------------------------|--------------------------|--------------------------|---|--------------------------|-------------------------------|-------------------------------|-------------------------------|---|--|
| | | 1934.3112 | 1934.3114 | 1934.2114 | 1939.3119 | 1939.3125 | 1939.3312 | 1939.3314 | 1939.3318 | 1939.0454 | |
| Lighting voltage (V) | | | | | | | | | | | |
| Actuator color / printing | | | | | | | | | | | |
| Housing color | | | | | | | | | | | |
| 20 (4) A 250 V AC 1E4 | | | | | | | | | | | |
| 12 (4) A 250 V AC 1E4 | | | | | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | |
| 10 (8) A 400 V AC 5E4 | | | | | | | | | | | |
| 10 (8) A 250 V AC 5E4 | | <input type="checkbox"/> | <input type="checkbox"/> | | | | | | | | |
| 10 A 12 V DC | | | | | | | | | | | |
| 6 (4) A 250 V AC 5E4 | | | | <input type="checkbox"/> | | | | | | | |
| 16 A 250 V AC 1 HP | | | | | | | | | | | |
| 16 A 125 V AC 3/4 HP | | | | | | | | | | | |
| 16 A 125 V AC 1/3 HP | | | | | | | | | | | |
| 14 A 250 V AC 3/4 HP | | | | | <input type="checkbox"/> | <input type="checkbox"/> | | | | | |
| 14 A 250 V AC 1/2 HP | | | | | | | <input type="checkbox"/> | | | | |
| 14 A 125 V AC 1/3 HP | | | | | <input type="checkbox"/> | <input type="checkbox"/> | | <input type="checkbox"/> | | | |
| 14 A 125 V AC 1/4 HP | | | | | | | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | |
| 12 A 250 V AC 1 HP | | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | | | | | | |
| 12 A 125 V AC 1/2 HP | | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | | | | | | |
| Terminal type | | | | | | | | | | | |
| Terminal description | | 6.3 | 6.3 | | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | | |
| Contact distance (mm) | | Ag ≥ 3 | Ag ≥ 3 | Ag ≥ 3 | Ag ≥ 3 | Ag ≥ 3 | Ag < 3 | Ag < 3 | Ag < 3 | Au < 3 | |
| Contact material | | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Au | |
| EN 60335 cap. 30 conform "G" | | | | | | | | | | | |
| Miscellaneous | | | | | | | momentary function both sides | momentary function both sides | momentary function both sides | single-pole occupied momentary function both sides | |
| Stock version | | | | | <input type="checkbox"/> | | <input type="checkbox"/> | <input type="checkbox"/> | | | |

- ROCKER SWITCHES
- PUSHBUTTON SWITCHES
- TOGGLE SWITCHES
- SLIDE SWITCHES
- ROTARY SWITCHES
- FOOT SWITCHES
- TACT AND KEY SWITCHES
- SMAP-ACTION SWITCHES
- MICRO-SIGNAL SWITCHES
- SENSORS
- ECO
- PUSH N' DRIVE




SERIES 1930 - DOUBLE-POLE ROCKER SWITCHES IP 65

TO 20 (4) A 250 V AC




Basic types 1932, 1934, 1935 and 1939 double-pole




X = Wall thickness


| x | y | z |
|---------------|----------------------|--------------------|
| 0.75 ... 1.25 | 30 ^{-0.1} | 22 ^{+0.2} |
| 1.25 ... 3 | 30.2 ^{-0.1} | 22 ^{+0.2} |

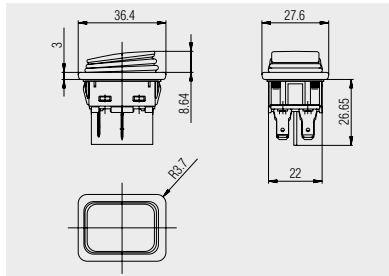


Quick-connect terminal 4.8 x 0.8 basic type 1932

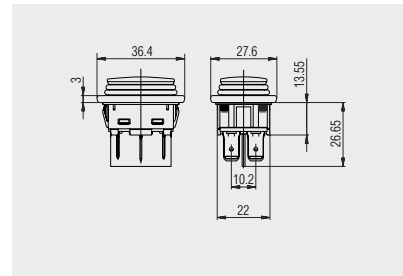


Quick-connect terminal 6.3 x 0.8 basic type 1939

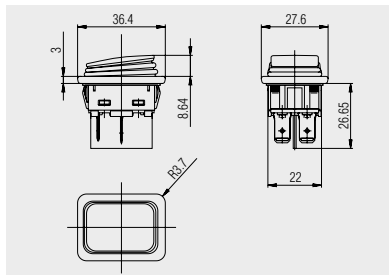


Quick-connect terminal 6.3 x 0.8 basic types 1932, 1934 and 1935

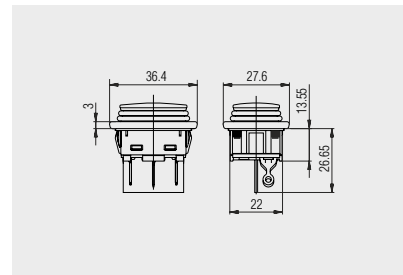

Solder terminal basic type 1939

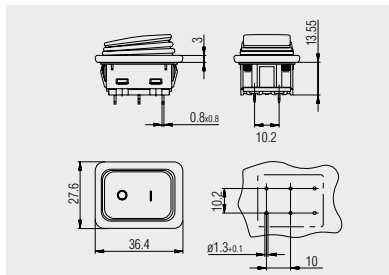

PCB terminal basic type 1934

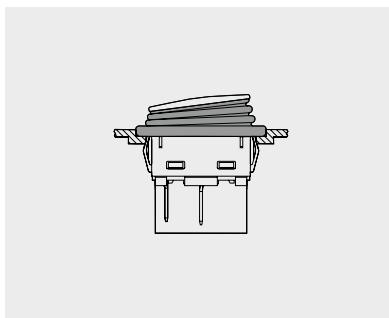

Sunken installation recommended for IP 65

A correct assembly and examination on tightness according to IP 65 in the equipment must be ensured by the customer.



Block connector 217.954.011

Block connector for cable connection for the double-pole versions of the rocker switch series 1830 und 1930.

Used with the standard timer plug AMP 0-927 936-1



SERIES 1656 - SINGLE-POLE ROCKER SWITCHES

TO 10 A 250 V AC



PRODUCT FEATURES

- Powerful, illuminated rocker switch with plate spring switching system
- Silk matt printable surface
- Can be mounted from rear (alternatively with frame)
- Switching system sealed from rocker to protect against overflowing water (VDE 700 part 15)
- Snap fastening for wall thicknesses > 2 mm

ON REQUEST

- Other actuator forms (e.g. oval)
- As a double switch
- Other colors
- Other printing variants
- Other terminal types
- Other lamp variants
- Variant without illumination
- Cable assembly


| | |
|--|--|
| Mechanical life endurance | 2E4 |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Ambient temperature | terminal side -20 °C ... +100 °C actuating side -20 °C ... +55 °C |
| Flammability | UL 94 V-2 |
| Glow wire test temperature | 850 °C |
| Material | actuator PA housing PA terminals Cu and CuZn bare (bearing terminal silver plated) |
| Plug force of the terminals | ≤ 80 N |
| Approval marks | |
| Suitable for appliances of protection class II | |



SERIES 1656 - SINGLE-POLE ROCKER SWITCHES


TO 10 A 250 V AC

| | | | | | | | | | |
|------------------------|----------------------|---------------------------|----------------------|---------------|----------------------|-----------------------|------------------|---------------|--|
| single-pole | Lighting voltage (V) | Actuator color / printing | | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
| | 10 A 250 V AC 1E4 | 10 A 250 V AC 1/2 HP | 10 A 125 V AC 1/3 HP | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| ON / OFF switch (SPST) | | | | | | | | | |
| 1656.1703 | 230 | | | | | 4.8 | ≥ 3 | Ag | |
| 1656.1723 | 90 | | | | | 4.8 | ≥ 3 | Ag | glow lamp with ignition voltage < 90 V |

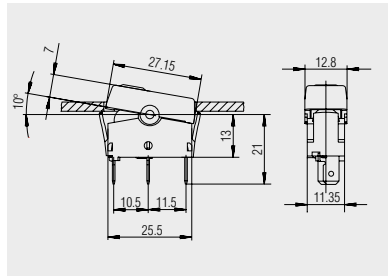


Basic type 1656

Quick-connect terminal 4.8 x 0.8



X = Wall thickness

| x | y | z |
|-----|--------------------|--------------------|
| > 2 | 28 ^{+0.1} | 13 ^{+0.1} |

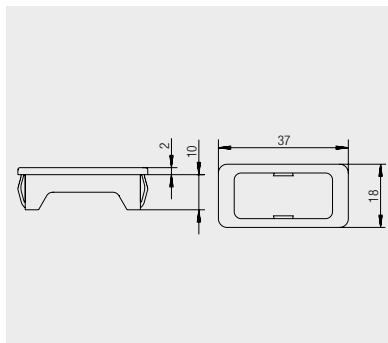

Mounting frame made of polyamide

Mounting frame

217.313.011 - black

217.313.041 - anthracite metallic

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'DRIVE



SERIES 3230 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 10 (5) A 12 AND 24 V DC



PRODUCT FEATURES

- Attractive rocker switch (rocker separate)
- Million times proven, friction snap-action contact system
- Powerful with 100 000 switching cycles electrically and mechanically for DC voltage applications
- Indicator lamp identical
- Dust and water protected
- High variety
- With or without function illumination (LED)
- Installation from the front directly or with assembly frame
- Block connector support

ON REQUEST










- Other colors
- Other rocker symbols (laser etched)
- Other switching functions
- Other lamp variants
- With assembled rocker

| | |
|--|---|
| Mechanical life endurance | 10E4 |
| Ambient temperature | -40 °C ... +85 °C |
| Material actuator housing terminals | PA glass fiber-reinforced PA silver plated |
| Miscellaneous | illumination with mounted rocker: day design = light gray / night design = pea green |



SERIES 3230 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 10 (5) A 12 AND 24 V DC

|  single-pole (rocker separate) | Lighting voltage (V) | Housing color | 10 (5) A 24 V DC 1E5 | 10 (5) A 12 V DC 1E5 | Terminal type | Terminal description | Miscellaneous | Stock version |
|---|----------------------|---------------|----------------------|----------------------|---|----------------------|---|---------------|
| Normally open contact latching 1-step (SPST) | | | | | | | | |
| 3230.0102 | 24 | | ○ | |  | 3.0 x 0.8 | with search lighting LED green circuit symbol: 3.01 | |
| 3230.0202 | 24 | | ○ | |  | 3.0 x 0.8 | with function indicator LED red with search lighting LED green circuit symbol: 3.03 | |
| 3230.0101 | 12 | | | ○ |  | 3.0 x 0.8 | with search lighting LED green circuit symbol: 3.01 | |
| 3230.0201 | 12 | | | ○ |  | 3.0 x 0.8 | with function indicator LED red with search lighting LED green circuit symbol: 3.03 | |
| Normally open contact momentary 1-step (SPNO) | | | | | | | | |
| 3230.0302 | 24 | | ○ | |  | 3.0 x 0.8 | with search lighting LED green circuit symbol: 3.02 | |
| 3230.0301 | 12 | | | ○ |  | 3.0 x 0.8 | with search lighting LED green circuit symbol: 3.02 | |
|  double-pole (rocker separate) | Lighting voltage (V) | Housing color | 10 (5) A 24 V DC 1E5 | 10 (5) A 12 V DC 1E5 | Terminal type | Terminal description | Miscellaneous | Stock version |
| Changeover switch latching 1-step (DPDT) | | | | | | | | |
| 3230.1902 | 12 | | ○ | |  | 3.0 x 0.8 | with search lighting LED green circuit symbol: 3.09 | |

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS








ECO






PUSH'N'DRIVE



SERIES 3230 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 10 (5) A 12 AND 24 V DC

|  Combination (rocker separate) | Lighting voltage (V) | Housing color | 10 (5) A 24 V DC 1E5 | 10 (5) A 12 V DC 1E5 | Terminal type | Terminal description | Miscellaneous | Stock version |
|---|----------------------|---------------|----------------------|----------------------|---|----------------------|--|---------------|
| Changeover switch latching 2-step (SPDT) | | | | | | | | |
| 3230.0502 | 24 | | ○ | |  | 3.0 x 0.8 | 2 x single-pole changeover switch with search lighting LED green circuit symbol: 3.31 | |
| 3230.0602 | 24 | | ○ | |  | 3.0 x 0.8 | 2 x single-pole changeover switch with function indicator LED red with search lighting LED green circuit symbol: 3.33 | |
| 3230.0501 | 12 | | | ○ |  | 3.0 x 0.8 | 2 x single-pole changeover switch with search lighting LED green circuit symbol: 3.31 | |
| 3230.0601 | 12 | | | ○ |  | 3.0 x 0.8 | 2 x single-pole changeover switch with function indicator LED red with search lighting LED green circuit symbol: 3.33 | |
| Changeover switch momentary 2-step (SPDT momentary) | | | | | | | | |
| 3230.0702 | 24 | | ○ | |  | 3.0 x 0.8 | 2 x single-pole changeover switch with search lighting LED green circuit symbol: 3.32 | |
| 3230.0701 | 12 | | | ○ |  | 3.0 x 0.8 | 2 x single-pole changeover switch with search lighting LED green circuit symbol: 3.32 | |


|  Lamp (rocker separate) | Lighting voltage (V) | Housing color | 10 (5) A 24 V DC 1E5 | 10 (5) A 12 V DC 1E5 | Terminal type | Terminal description | Miscellaneous | Stock version |
|--|----------------------|---------------|----------------------|----------------------|---|----------------------|--------------------|---------------|
| Lamp | | | | | | | | |
| 3237.0102 | 24 24 | | | |  | 3.0 x 0.8 | LED red / red | |
| 3237.0104 | 24 24 | | | |  | 3.0 x 0.8 | LED red / green | |
| 3237.0106 | 24 24 | | | |  | 3.0 x 0.8 | LED green / green | |
| 3237.0108 | 24 24 | | | |  | 3.0 x 0.8 | LED yellow / green | |

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH N'DRIVE



SERIES 3230 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 10 (5) A 12 AND 24 V DC

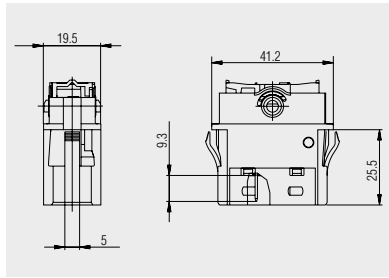

Quick-connect terminal 3.0 x 0.8

Basic types 3230 and 3237




Rocker

190.389.011 - without stop
(switching function both sides)

190.389.021 - with stop
(switching function one side)

Cap

203.442.011 - with stop both
sides (for lamp 3237)

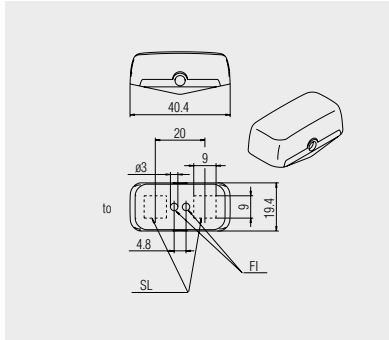

Snap-on rocker for basic type 3230 and cap for basic type 3237 (without switching function) painted black with or without stop for both or one-sided switching function. Laser etched by customer or on request.


Note:

Rocker must be ordered separately in addition to the basic switch. Assembly on customer side.



Installation frame

217.353.021

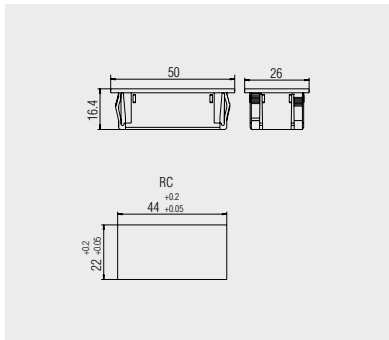

Installation frame for basic types 3230 and 3237 in black



Dummy piece

203.069.013






Dummy piece for the basic types 3230 and 3237 with mounted black cap



SERIES 3230 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 10 (5) A 12 AND 24 V DC

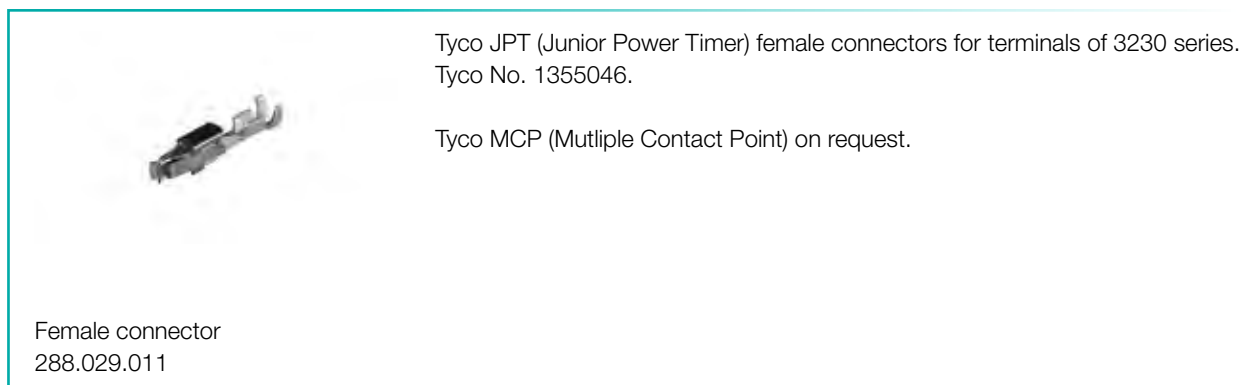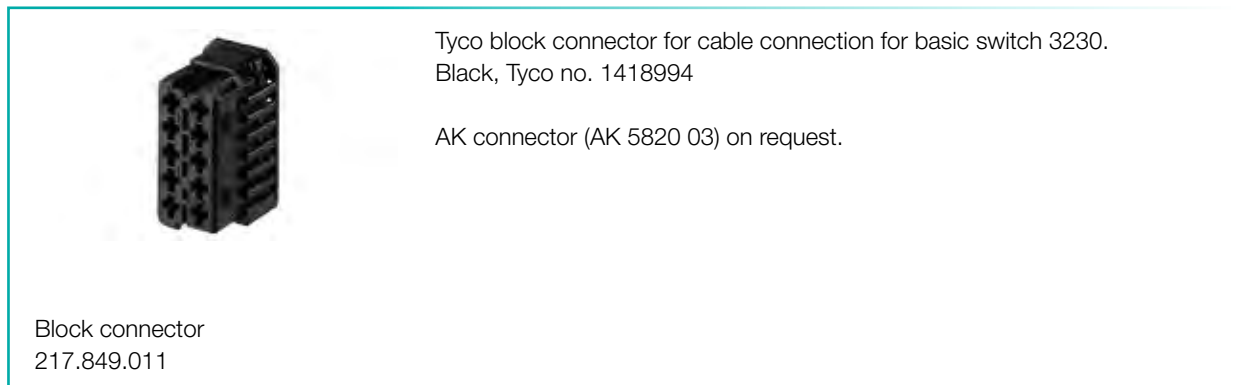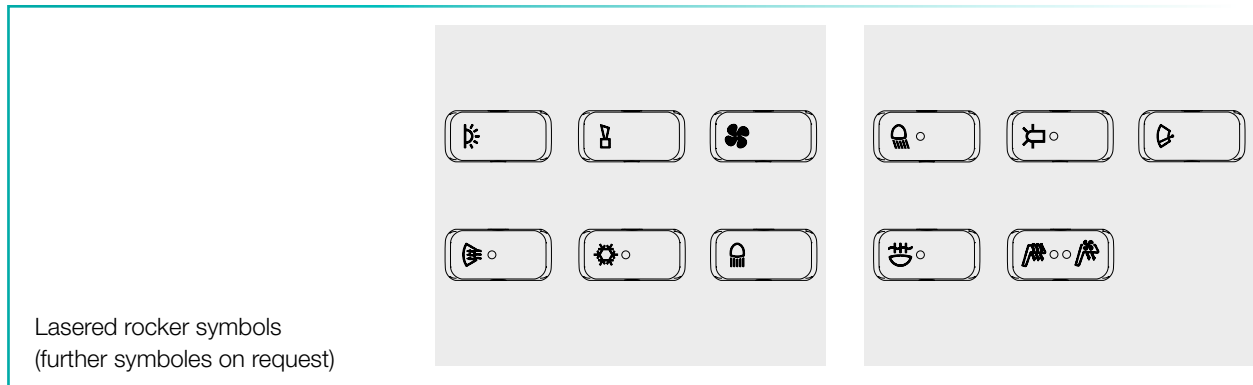

Further information under

WWW.MARQUARDT-SWITCHES.COM



SERIES 3230 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 10 (5) A 12 AND 24 V DC

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SWAP-ACTION SWITCHES


MICRO-SIGNAL SWITCHES

SENSORS


ECO

PUSH'N'DRIVE


Circuit symbols

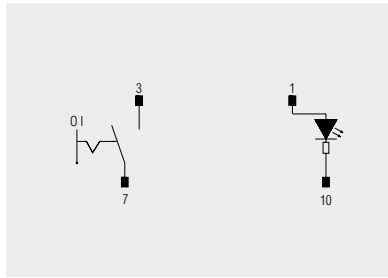


Circuit symbol: 3.01

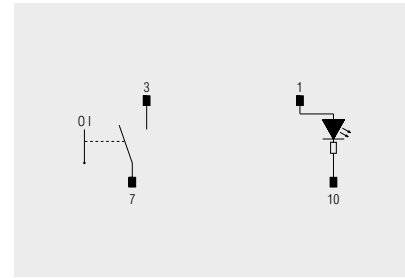


Circuit symbol: 3.02

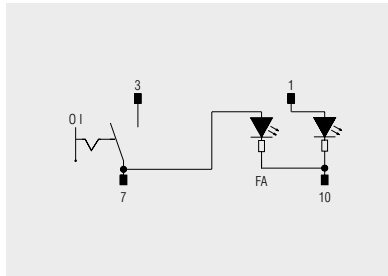


Circuit symbol: 3.03

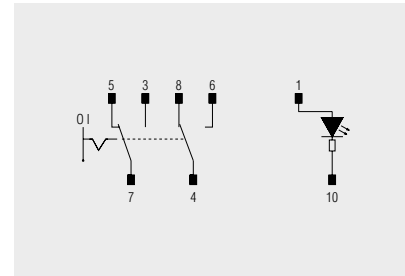


Circuit symbol: 3.09

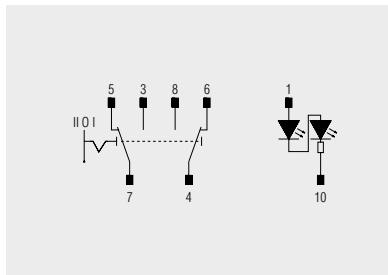

Circuit symbol: 3.31

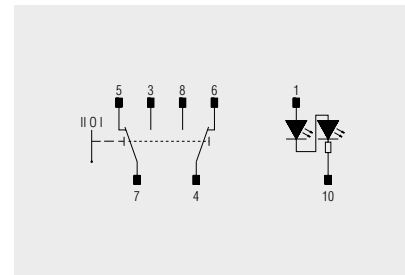

Circuit symbol: 3.32

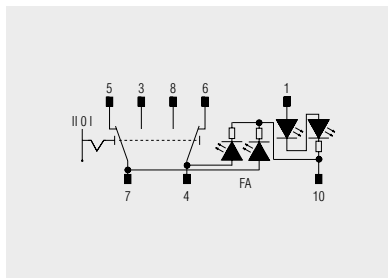

Circuit symbol: 3.33

➔ SERIES 3250 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES IP 66/IP 68

TO 20 (10) A 12 AND 24 V DC 1E5



PRODUCT FEATURES

- ➔ High dust and water protection with IP 66 and IP 68
- ➔ Unique and millions of times proven snap-action switching system
- ➔ Self cleaning due to relative movement
- ➔ Up to 4 integrated LEDs for background and function illumination
- ➔ Mechanical life $\geq 500\,000$ cycles
- ➔ Wide range up to 20 A at 12 / 24 VDC
- ➔ Large variety of all required switching and circuit options
- ➔ Attractive design with various cap shapes and colors
- ➔ Large selection of laser etched symbols and accessories
- ➔ Individually configurable on www.marquardt-switches.com/configurator3250


ON REQUEST

- ➔ Further cap symbols (laser etched)
- ➔ Further switching functions
- ➔ Further illumination variants
- ➔ Further cap colors
- ➔ Customer specific cap style

| | |
|---|---|
| Mechanical life endurance | 50E4 |
| Operating force | 7 N to 12 N +1,5 N |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Actuator | IP 66 and IP 68 actuator side |
| Ambient temperature | terminal side -40 °C ... +85 °C actuating side -40 °C ... +85 °C |
| Material actuator housing terminals | PA glass fiber-reinforced / PC PA / PP silver plated |
| Terminal type | Quick-connect terminal |
| Lighting type | Symbol position 1 + 2 green; red function illumination red; yellow external function illumination red; yellow |
| Lighting voltage | 24 V 12 V |

➤ SERIES 3250 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES IP 66/IP 68

TO 20 (10) A 12 AND 24 V DC 1E5

|  single-pole | Lighting voltage (V) | Housing color | 20 (10) A 24 V DC 1E5 | 20 (10) A 12 V DC 1E5 | 10 (5) A 24 V DC 1E5 | 10 (5) A 12 - 24 V DC 1E5 | 10 (5) A 12 V DC 1E5 | < 100 mA 24 V DC 5E5 | < 100 mA 12 V DC 5E5 | Terminal type | Terminal description | Product code | Miscellaneous | Stock version |
|--|-------------------------------|---------------|-----------------------|-----------------------|----------------------|---------------------------|----------------------|----------------------|----------------------|---------------|----------------------|-----------------------------------|--|---------------|
| | ON / OFF switch (SPST) | | | | | | | | | | | | | |
| 3250.0009 | 24 | ○ | | | | | | | | ⌋ | 3.0 x 0.8 | 3250-1A-30-3-0 | with search lighting LED green circuit symbol: 50.01 | |
| 3250.0033 | 24 | ○ | | | | | | | | ⌋ | 3.0 x 0.8 | 3250-1A-40-3-0 | with search lighting LED red circuit symbol: 50.01 | |
| 3250.0007 | 24 | | | ○ | | | | | | ⌋ | 3.0 x 0.8 | 3250-1A-30-1-0 | with search lighting LED green circuit symbol: 50.01 | |
| 3250.0013 | 24 | | | ○ | | | | | | ⌋ | 3.0 x 0.8 | 3250-1A-31-1-0 | with function indicator LED red with search lighting LED green circuit symbol: 50.13 | |
| 3251.0002 | 24 | | | ○ | | | | | | ⌋ | 3.0 x 0.8 | 3250-1A-31-1-0-A0-bl-0719-0000-01 | with function indicator LED red with search lighting LED green with pre assembled cap circuit symbol: 50.13 | |
| 3251.0005 | 24 | | | ○ | | | | | | ⌋ | 3.0 x 0.8 | 3250-1A-31-1-0-A0-re-1360-0000-00 | with search lighting LED green with pre assembled cap circuit symbol: 50.01 | |
| 3250.0006 | 12 | | | ○ | | | | | | ⌋ | 3.0 x 0.8 | 3250-1A-10-3-0 | with search lighting LED green circuit symbol: 50.01 | |
| 3250.0030 | 12 | | | ○ | | | | | | ⌋ | 3.0 x 0.8 | 3250-1A-20-3-0 | with search lighting LED red circuit symbol: 50.01 | |
| 3250.0001 | | | | | ○ | | | | | ⌋ | 3.0 x 0.8 | 3250-1A-00-1-0 | circuit symbol: 50.43 | |
| Normally open contact (SPNO) | | | | | | | | | | | | | | |
| 3250.0060 | 24 | ○ | | | | | | | | ⌋ | 3.0 x 0.8 | 3250-1B-30-3-0 | with search lighting LED green circuit symbol: 50.02 | |
| 3250.0072 | 24 | ○ | | | | | | | | ⌋ | 3.0 x 0.8 | 3250-1B-40-3-0 | with search lighting LED red circuit symbol: 50.02 | |
| 3250.0057 | 12 | | | ○ | | | | | | ⌋ | 3.0 x 0.8 | 3250-1B-10-3-0 | with search lighting LED green circuit symbol: 50.02 | |
| 3250.0069 | 12 | | | ○ | | | | | | ⌋ | 3.0 x 0.8 | 3250-1B-20-3-0 | with search lighting LED red circuit symbol: 50.02 | |
| 3250.0052 | | | | | ○ | | | | | ⌋ | 3.0 x 0.8 | 3250-1B-00-1-0 | circuit symbol: 50.44 | |
| Changeover switch (SPDT) | | | | | | | | | | | | | | |
| 3250.0118 | 24 | | | ○ | | | | | | ⌋ | 3.0 x 0.8 | 3250-1E-31-1-0 | with function indicator LED red with search lighting LED green circuit symbol: 50.17 | |
| 3250.0142 | 24 | | | ○ | | | | | | ⌋ | 3.0 x 0.8 | 3250-1E-41-1-0 | with function indicator LED yellow with search lighting LED red circuit symbol: 50.17 | |
| 3250.0115 | 12 | | | | ○ | | | | | ⌋ | 3.0 x 0.8 | 3250-1E-11-1-0 | with function indicator LED red with search lighting LED green circuit symbol: 50.17 | |
| 3250.0139 | 12 | | | | ○ | | | | | ⌋ | 3.0 x 0.8 | 3250-1E-21-1-0 | with function indicator LED yellow with search lighting LED red circuit symbol: 50.17 | |
| 3250.0106 | | | | | ○ | | | | | ⌋ | 3.0 x 0.8 | 3250-1E-00-1-0 | circuit symbol: 50.47 | |
| Changeover switch (SPDT momentary) | | | | | | | | | | | | | | |
| 3250.0163 | 24 | | | ○ | | | | | | ⌋ | 3.0 x 0.8 | 3250-1F-30-1-0 | with search lighting LED green circuit symbol: 50.06 | |
| 3250.0170 | 24 | | | | | | ○ | | | ⌋ | 3.0 x 0.8 | 3250-1F-34-2-0 | with function indicator LED red with search lighting LED green circuit symbol: 50.24 | |
| 3250.0160 | 12 | | | | ○ | | | | | ⌋ | 3.0 x 0.8 | 3250-1F-10-1-0 | with search lighting LED green circuit symbol: 50.06 | |
| 3250.0167 | 12 | | | | | | | ○ | | ⌋ | 3.0 x 0.8 | 3250-1F-14-2-0 | with function indicator LED red with search lighting LED green circuit symbol: 50.24 | |

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SWAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES














SENSORS

ECO

PUSH'DRIVE

➔ SERIES 3250 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES IP 66/IP 68

TO 20 (10) A 12 AND 24 V DC 1E5

|  double-pole | Lighting voltage (V) | Housing color | 20 (10) A 24 V DC 1E5 | 20 (10) A 12 V DC 1E5 | 10 (5) A 24 V DC 1E5 | 10 (5) A 12 - 24 V DC 1E5 | 10 (5) A 12 V DC 1E5 | < 100 mA 24 V DC 5E5 | < 100 mA 12 V DC 5E5 | Terminal type | Terminal description | Product code | Miscellaneous | Stock version |
|--|------------------------|---------------|-----------------------|-----------------------|----------------------|---------------------------|----------------------|----------------------|----------------------|---|----------------------|-----------------------------------|--|---------------|
| | ON / OFF switch (DPST) | | | | | | | | | | | | | |
| 3250.0196 | 24 | | | | | ○ | | | |  | 3.0 x 0.8 | 3250-2A-31-1-0 | with function indicator LED red with search lighting LED green circuit symbol: 50.25 | |
| 3250.0184 | | | | | ○ | | | | |  | 3.0 x 0.8 | 3250-2A-00-1-0 | circuit symbol: 50.49 | |
| Changeover switch (DPDT) | | | | | | | | | | | | | | |
| 3250.0301 | 24 | | | | ○ | | | | |  | 3.0 x 0.8 | 3250-2E-31-1-0 | with function indicator LED red with search lighting LED green circuit symbol: 50.29 | |
| 3250.0325 | 24 | | | | ○ | | | | |  | 3.0 x 0.8 | 3250-2E-41-1-0 | with function indicator LED yellow with search lighting LED red circuit symbol: 50.29 | |
| 3250.0298 | 12 | | | | | ○ | | | |  | 3.0 x 0.8 | 3250-2E-11-1-0 | with function indicator LED red with search lighting LED green circuit symbol: 50.29 | |
| 3250.0322 | 12 | | | | | ○ | | | |  | 3.0 x 0.8 | 3250-2E-21-1-0 | with function indicator LED yellow with search lighting LED red circuit symbol: 50.29 | |
| 3251.0003 | 12 | | | | | ○ | | | |  | 3.0 x 0.8 | 3250-2E-21-1-0-B0-bl-1370-0000-01 | with function indicator LED yellow with search lighting LED red with pre assembled cap circuit symbol: 50.29 | |
| 3250.0289 | | | | | ○ | | | | |  | 3.0 x 0.8 | 3250-2E-00-1-0 | circuit symbol: 50.53 | |
| Changeover switch (DPDT momentary) | | | | | | | | | | | | | | |
| 3250.0346 | 24 | | | | ○ | | | | |  | 3.0 x 0.8 | 3250-2F-30-1-0 | with search lighting LED green circuit symbol: 50.42 | |
| 3250.0353 | 24 | | | | | ○ | | | |  | 3.0 x 0.8 | 3250-2F-35-2-0 | with function indicator LED red with search lighting LED green circuit symbol: 50.36 | |
| 3250.0343 | 12 | | | | | ○ | | | |  | 3.0 x 0.8 | 3250-2F-10-1-0 | with search lighting LED green circuit symbol: 50.42 | |
| 3250.0350 | 12 | | | | | | | ○ | |  | 3.0 x 0.8 | 3250-2F-15-2-0 | with function indicator LED red with search lighting LED green circuit symbol: 50.36 | |

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES
























SENSORS

ECO

PUSH N' DRIVE

➔ SERIES 3250 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES IP 66/IP 68

TO 20 (10) A 12 AND 24 V DC 1E5

|  Combination | Lighting voltage (V) | Housing color | 20 (10) A 24 V DC 1E5 | 20 (10) A 12 V DC 1E5 | 10 (5) A 24 V DC 1E5 | 10 (5) A 12 - 24 V DC 1E5 | 10 (5) A 12 V DC 1E5 | < 100 mA 24 V DC 5E5 | < 100 mA 12 V DC 5E5 | Terminal type | Terminal description | Product code | Miscellaneous | Stock version |
|--|---|---------------|-----------------------|-----------------------|----------------------|---------------------------|----------------------|----------------------|----------------------|---|----------------------|-----------------------------------|---|---------------|
| | 3-step OFF-ON-ON switch (2xSPST) | | | | | | | | | | | | | |
| 3250.0649 | | | | | ○ | | | | |  | 3.0 x 0.8 | 3250-5A-00-1-0 | circuit symbol: 50.139 | |
| Changeover switch with OFF-position in the center (2xSPST - Center OFF) | | | | | | | | | | | | | | |
| 3250.0379 | 24 | | | | ○ | | | | |  | 3.0 x 0.8 | 3250-3A-34-1-0 | with function indicator LED red with search lighting LED green circuit symbol: 50.113 | |
| 3250.0436 | 24 | | | | ○ | | | | |  | 3.0 x 0.8 | 3250-3B-39-1-0 | with search lighting LED green circuit symbol: 50.108 momentary function both sides | |
| 3250.0431 | 24 | | | | | | | ○ | |  | 3.0 x 0.8 | 3250-3B-48-2-0 | with function indicator LED yellow with search lighting LED red momentary function both sides | |
| 3250.0376 | 12 | | | | | | ○ | | |  | 3.0 x 0.8 | 3250-3A-14-1-0 | with function indicator LED red with search lighting LED green circuit symbol: 50.113 | |
| 3250.0433 | 12 | | | | | | ○ | | |  | 3.0 x 0.8 | 3250-3B-19-1-0 | mit Suchbeleuchtung LED grün Schaltzeichen: 50.108 Tastfunktion beidseitig | |
| 3251.0004 | 12 | | | | | | ○ | | |  | 3.0 x 0.8 | 3250-3B-19-1-0-B0-bl-1390-1380-00 | mit Suchbeleuchtung LED grün Schaltzeichen: 50.108 Tastfunktion beidseitig | |
| 3250.0428 | 12 | | | | | | | ○ | |  | 3.0 x 0.8 | 3250-3B-28-2-0 | mit Funktionsanzeige LED gelb mit Suchbeleuchtung LED rot Schaltzeichen: 50.128 Tastfunktion beidseitig | |
| 3250.0367 | | | | | ○ | | | | |  | 3.0 x 0.8 | 3250-3A-00-1-0 | Schaltzeichen: 50.121 | |
| 3250.0418 | | | | | ○ | | | | |  | 3.0 x 0.8 | 3250-3B-00-1-0 | Schaltzeichen: 50.122 Tastfunktion beidseitig | |
| 3-step changeover switch (2xSPDT) | | | | | | | | | | | | | | |
| 3250.0514 | 24 | | | | ○ | | | | |  | 3.0 x 0.8 | 3250-4A-34-1-0 | mit Funktionsanzeige LED rot mit Suchbeleuchtung LED grün Schaltzeichen: 50.117 | |
| 3250.0577 | 24 | | | | ○ | | | | |  | 3.0 x 0.8 | 3250-4B-39-1-0 | mit Suchbeleuchtung LED grün Schaltzeichen: 50.112 Tastfunktion beidseitig | |
| 3250.0616 | 24 | | | | ○ | | | | |  | 3.0 x 0.8 | 3250-4C-38-1-0 | mit Funktionsanzeige LED rot mit Suchbeleuchtung LED grün Schaltzeichen: 50.137 Tastfunktion einseitig | |
| 3250.0572 | 24 | | | | | | ○ | | |  | 3.0 x 0.8 | 3250-4B-38-2-0 | mit Funktionsanzeige LED rot mit Suchbeleuchtung LED grün Schaltzeichen: 50.132 Tastfunktion beidseitig | |
| 3250.0590 | 24 | | | | | | ○ | | |  | 3.0 x 0.8 | 3250-4B-48-2-0 | mit Funktionsanzeige LED gelb mit Suchbeleuchtung LED rot Schaltzeichen: 50.132 Tastfunktion beidseitig | |
| 3250.0511 | 12 | | | | | | ○ | | |  | 3.0 x 0.8 | 3250-4A-14-1-0 | mit Funktionsanzeige LED rot mit Suchbeleuchtung LED grün Schaltzeichen: 50.117 | |
| 3250.0574 | 12 | | | | | | ○ | | |  | 3.0 x 0.8 | 3250-4B-19-1-0 | mit Suchbeleuchtung LED grün Schaltzeichen: 50.112 Tastfunktion beidseitig | |
| 3250.0613 | 12 | | | | | | ○ | | |  | 3.0 x 0.8 | 3250-4C-18-1-0 | mit Funktionsanzeige LED rot mit Suchbeleuchtung LED grün Schaltzeichen: 50.137 Tastfunktion einseitig | |
| 3250.0569 | 12 | | | | | | | ○ | |  | 3.0 x 0.8 | 3250-4B-18-2-0 | mit Funktionsanzeige LED rot mit Suchbeleuchtung LED grün Schaltzeichen: 50.132 Tastfunktion beidseitig | |
| 3250.0587 | 12 | | | | | | | ○ | |  | 3.0 x 0.8 | 3250-4B-28-2-0 | | |
| 3251.0001 | 12 | | | | | | | ○ | |  | 3.0 x 0.8 | 3250-4B-28-2-0-B0-bl-1213-1223-02 | mit Funktionsanzeige LED gelb mit Suchbeleuchtung LED rot Schaltzeichen: 50.132 Tastfunktion beidseitig | |
| 3250.0496 | | | | | ○ | | | | |  | 3.0 x 0.8 | 3250-4A-00-K1-0 | Schaltzeichen: 50.125 | |

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SWAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES


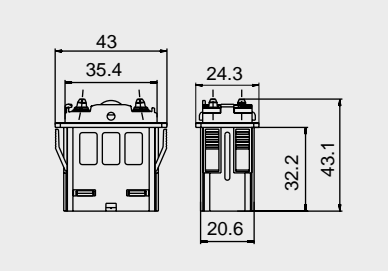
SENSORS

ECO

PUSH'DRIVE


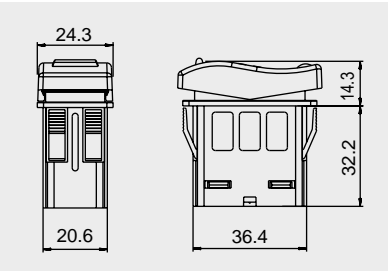
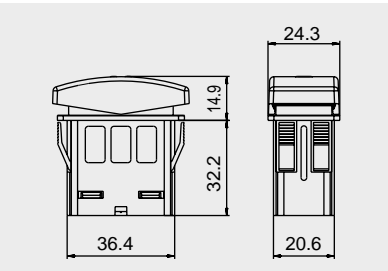
➤ SERIES 3250 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES IP 66/IP 68

TO 20 (10) A 12 AND 24 V DC 1E5

Series 3250


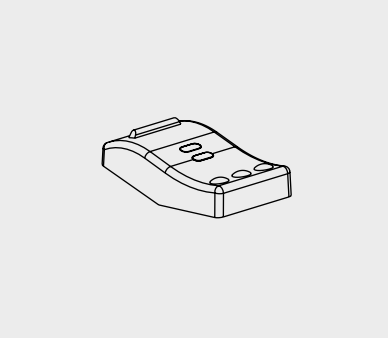
Quick-connect terminal 3.0 x 0.8

Series 3250

Quick-connect terminal 3.0 x 0.8

Quick-connect terminal 3.0 x 0.8

Cap design 1

black
203.990.015 - no light guide
203.105.016 - 1 light guide
203.105.026 - 2 light guide

red
203.990.045 - kein light guide
203.105.036 - 1 light guide
203.105.046 - 2 light guide

lock 1
203.107.016 - bl.; no light g.
203.107.046 - bl.; 1 light g.
203.107.076 - red.; no light g.
203.107.106 - red.; 1 light g.

lock 2
203.107.026 - bl.; no light g.
203.107.056 - bl.; 1 light g.
203.107.086 - red.; no light g.
203.107.116 - red.; 1 light g.

lock 3
203.107.036 - bl.; no light g.
203.107.066 - bl.; 1 light g.
203.107.096 - red.; no light g.
203.107.126 - red.; 1 light g.

Snap-on cap for basic type 3250. Painted black or red. With or without light guide for function illumination. Laser etched by customer or on request.

Versions with locking function:

- lock 1 in neutral position
- lock 2 in actuated position
- lock 3 in both positions

Note: Rocker must be ordered separately in addition to the basic switch. Assembly on request or on customer side.

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH N' DRIVE

➤ SERIES 3250 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES IP 66/IP 68

TO 20 (10) A 12 AND 24 V DC 1E5




Cap design 2

black

- 203.991.015 - no light guide
- 203.106.016 - 1 light guide
- 203.106.026 - 2 light guide

red

- 203.991.045 - kein light guide
- 203.106.036 - 1 light guide
- 203.106.046 - 2 light guide

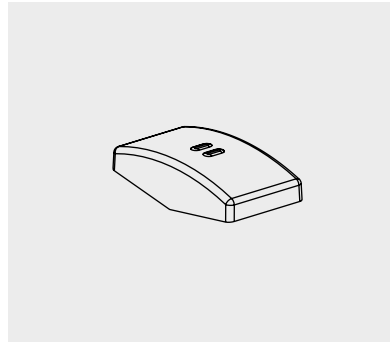

lock 1

- 203.108.016 - bl.; no light g.
- 203.108.046 - bl.; 1 light g.
- 203.108.076 - red; no light g.
- 203.108.106 - red.; 1 light g.

lock 2

- 203.108.026 - bl.; no light g.
- 203.108.056 - bl.; 1 light g.
- 203.108.086 - red.; no light g.
- 203.108.116 - red.; 1 light g.

Snap-on cap for basic type 3250. Painted black or red. With or without light guide for function illumination. Laser etched by customer or on request.

Versions with locking function:

- lock 1 in neutral position
- lock 2 in actuated position
- lock 3 in both positions

Note: Rocker must be ordered separately in addition to the basic switch. Assembly on request or on customer side.



lock 3

- 203.108.036 - bl.; no light g.
- 203.108.066 - bl.; 1 light g.
- 203.108.096 - red.; no light g.
- 203.108.126 - red.; 1 light g.





Assembly frame

- Can be stringed together; black
- 217.887.011 (end piece)
- 217.887.021 (center piece)

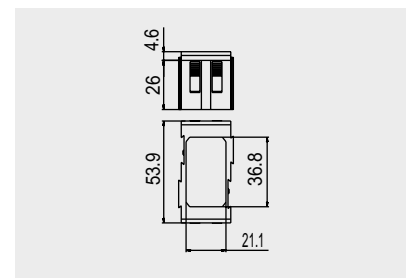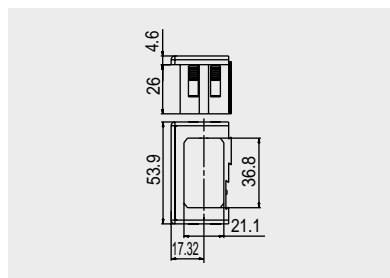



➤ SERIES 3250 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES IP 66/IP 68

TO 20 (10) A 12 AND 24 V DC 1E5



Adapter frame
217.879.011

Adapter frame for basic type 3250 in black. For cut-out 44 mm x 22 mm.



Panel seal
343.171.011
Seal for adapter frame
343.171.021

Panel seal for base switch 3250 / adapter frame 217.879.011. Dust- and water protection IP 67 from actuation side (correct customer assembly mandatory). Assembly on customers side or on demand. Thickness 1.5 mm; black.

Hole plug
237.036.011

Hole plug for basic type 3250. With support for block connector.

Pilot light 3257

Pilot light 3257 in the same design as basic type 3250 without switching function. With 2 LEDs. Different colors available on demand. Each LED individually controllable. Laser inscription by customer or on request.

➤ SERIES 3250 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES IP 66/IP 68

TO 20 (10) A 12 AND 24 V DC 1E5



Tyco block connector for cable connection for basic switch 3250.
Black, Tyco no. 1418994

AK connector (AK 5820 03) on request.


Block connector
217.849.011



Tyco JPT (Junior Power Timer) female connectors for terminals of 3250 series.
Tyco No. 1355046.

Tyco MCP (Multiple Contact Point) on request.

Female connector
288.029.011

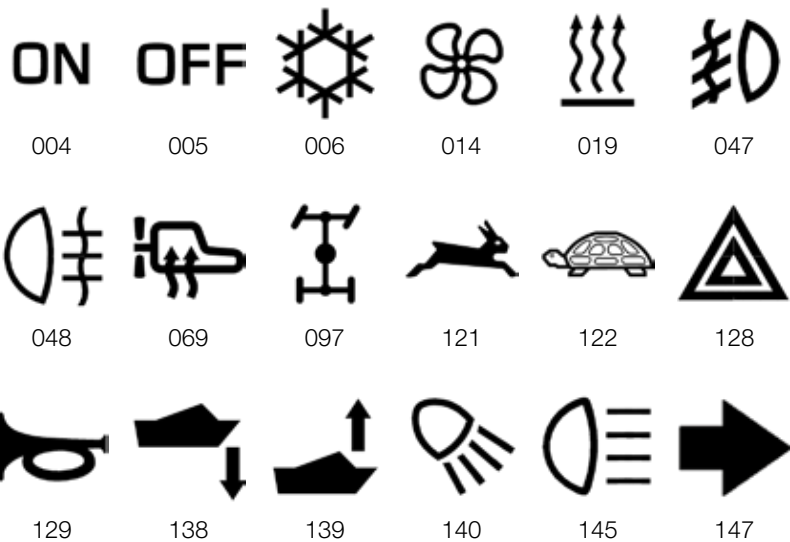


Lasered rocker symbols
(examples)
more on request


➤ SERIES 3250 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES IP 66/IP 68

TO 20 (10) A 12 AND 24 V DC 1E5


Circuit symbols

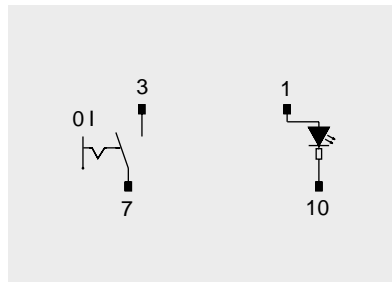


50.01

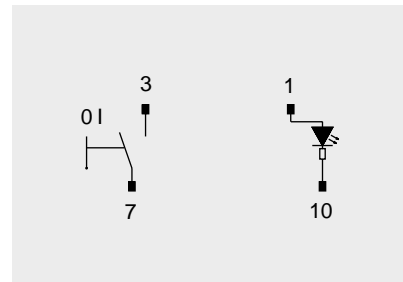


50.02

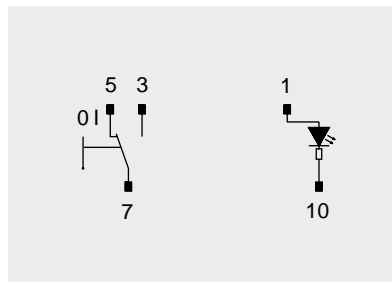


50.06

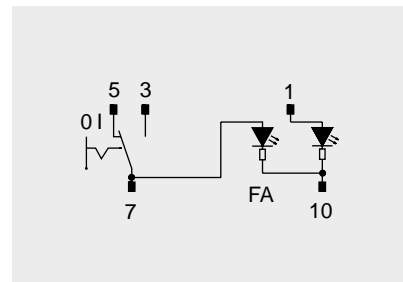


50.17

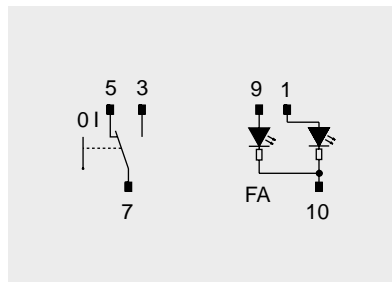


50.24

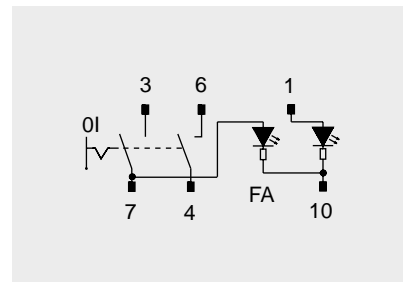


50.25

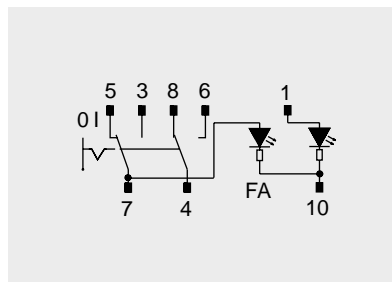


50.29

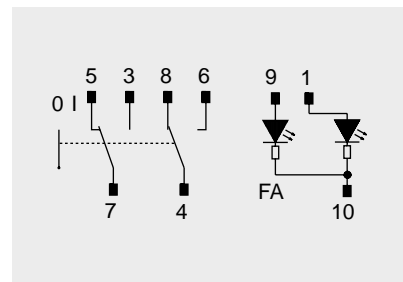

50.36

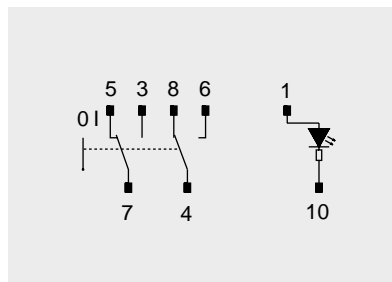

50.42

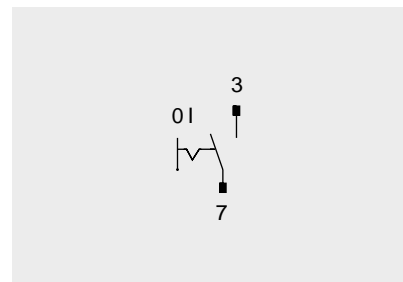

50.43

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH-IN DRIVE

➤ SERIES 3250 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES IP 66/IP 68

TO 20 (10) A 12 AND 24 V DC 1E5

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SWAP-ACTION SWITCHES


MICRO-SIGNAL SWITCHES

SENSORS


ECO

PUSH'N'DRIVE


Circuit symbols
(continue from page 91)

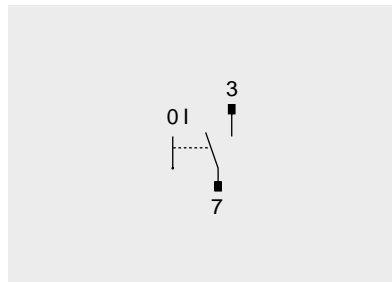


50.44

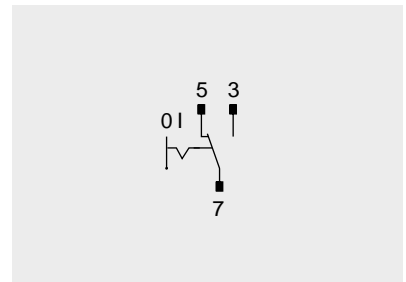


50.47

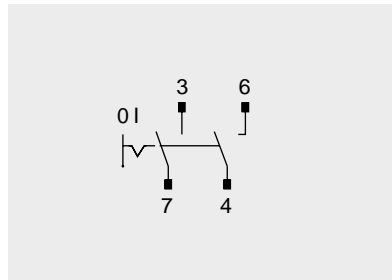


50.49

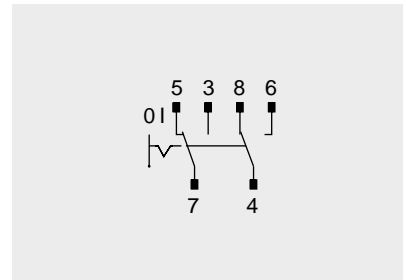


50.53

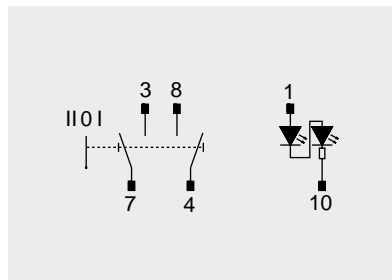


50.108

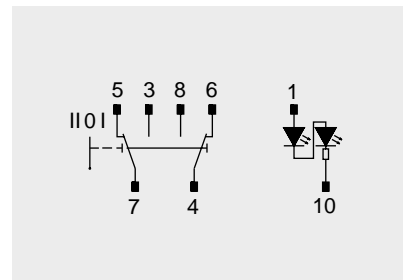


50.112

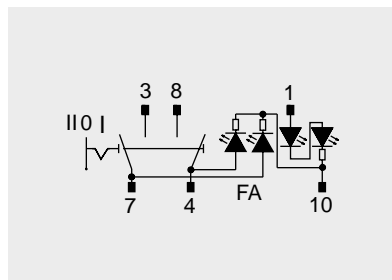


50.113

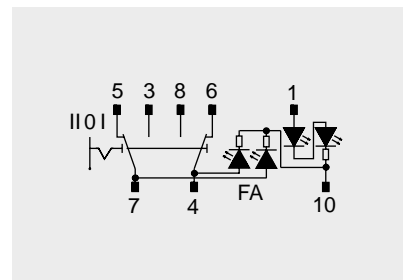

50.117

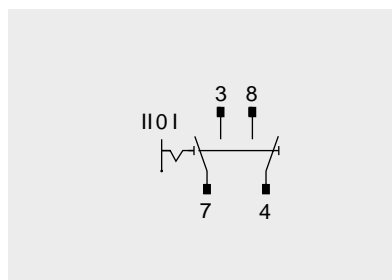

50.121

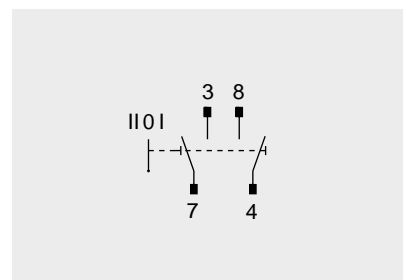


50.122


➤ SERIES 3250 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES IP 66/IP 68

TO 20 (10) A 12 AND 24 V DC 1E5


Circuit symbols
(continue from page 92)

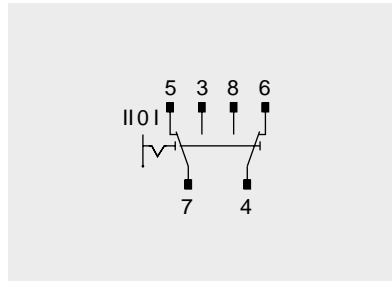


50.125

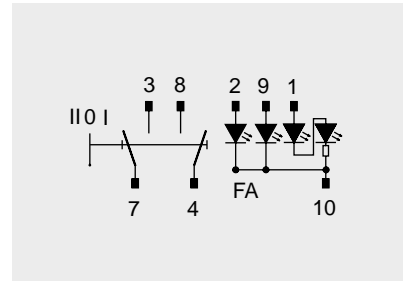


50.128

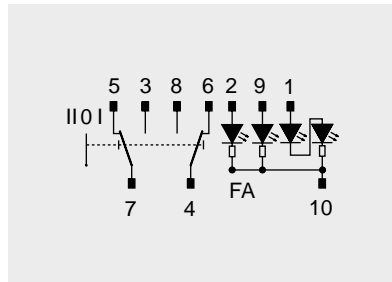

50.132

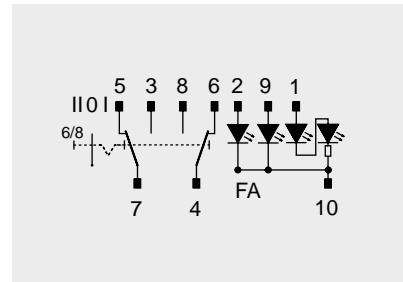

50.137

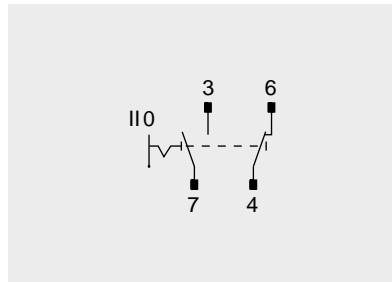

50.139

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH 'N' DRIVE



SERIES 0344 - THREE-POLE ROCKER SWITCHES

TO 16 (6) A 400 V AC

PRODUCT FEATURES


- Robust and powerful rocker switch
- Dust protected
- Approval for 400 V


ON REQUEST

- Other terminal variants

| | |
|--|--|
| Material actuator housing terminals | PA Duroplast / Duroplast (base) / chromated galvanized steel (bracket plate) chromatiert |
| Prüfzeichen | |

| three-pole | Actuator color / printing | Housing color | 16 (6) A 400 V AC 5E4 | 25 A 400 V AC | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
|------------------------|---------------------------|---------------|-----------------------|---------------|---------------|----------------------|-----------------------|------------------|---------------|---------------|
| ON / OFF switch (TPST) | | | | | | | | | | |
| 0344.0102 | | | | | | M4 | ≥ 3 | Ag | | |
| 0344.0201 | | | | | | M4 | ≥ 3 | Ag | | |



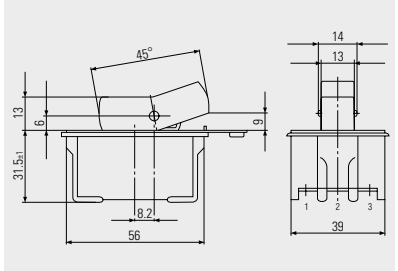

Screw terminal M4

Basic type 0344



PUSHBUTTON SWITCHES

| | |
|----------------------------|--|
| ROCKER SWITCHES | |
| PUSHBUTTON SWITCHES | |
| TOGGLE SWITCHES | |
| SLIDE SWITCHES | |
| ROTARY SWITCHES | |
| FOOT SWITCHES | |
| TACT AND KEY SWITCHES | |
| SNAP-ACTION SWITCHES | |
| MICRO-SIGNAL SWITCHES | |
| SENSORS | |
| ECO | |
| PUSH'N'DRIVE | |

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH'N'DRIVE



SERIES 1680

Single and double-pole pushbutton switches to 16 (4) A / 12 (12) A 250 V AC



▶ PAGE
98 – 104

SERIES 1683

Single and double-pole pushbutton switches to 16 A 250 V AC

Appliance cut-out: 19,2 x 12,9 mm



▶ PAGE
105 – 108

SERIES 1691

Smallest single-pole pushbutton switches for low voltages



▶ PAGE
109

SERIES 1247

Double-pole pushbutton switches to 7 (7) A 250 V AC



▶ PAGE
110 – 111

SERIES 5000

Round pushbutton switches for at least 200 000 mechanical switching cycles

Appliance cut-out: Ø 16.0 mm



▶ PAGE
112 – 113

SERIES 1846

Single-pole pushbutton switches to 2 (1) A 250 V AC

Appliance cut-out: 19,2 x 12,9 mm



▶ PAGE
114 – 115

SERIES 1840

Single and double-pole pushbutton switches to 6 (4) A 250 V AC

Appliance cut-out: Ø 12.0 mm



▶ PAGE
116 – 119



SERIES 1660

Single and double-pole
pushbutton switches
to 16 (4) A 250 V AC

Appliance cut-out: 30.0 x 22.2 mm



▶ PAGE
120 – 123

SERIES 1670

Single and double-pole
pushbutton switches
to 16 (4) A 250 V AC


Appliance cut-out: 30.0 x 22.2 mm



▶ PAGE
124 – 128

➔ SERIES 1680 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES

TO 16 (4) A / 12 (12) A 250 V AC

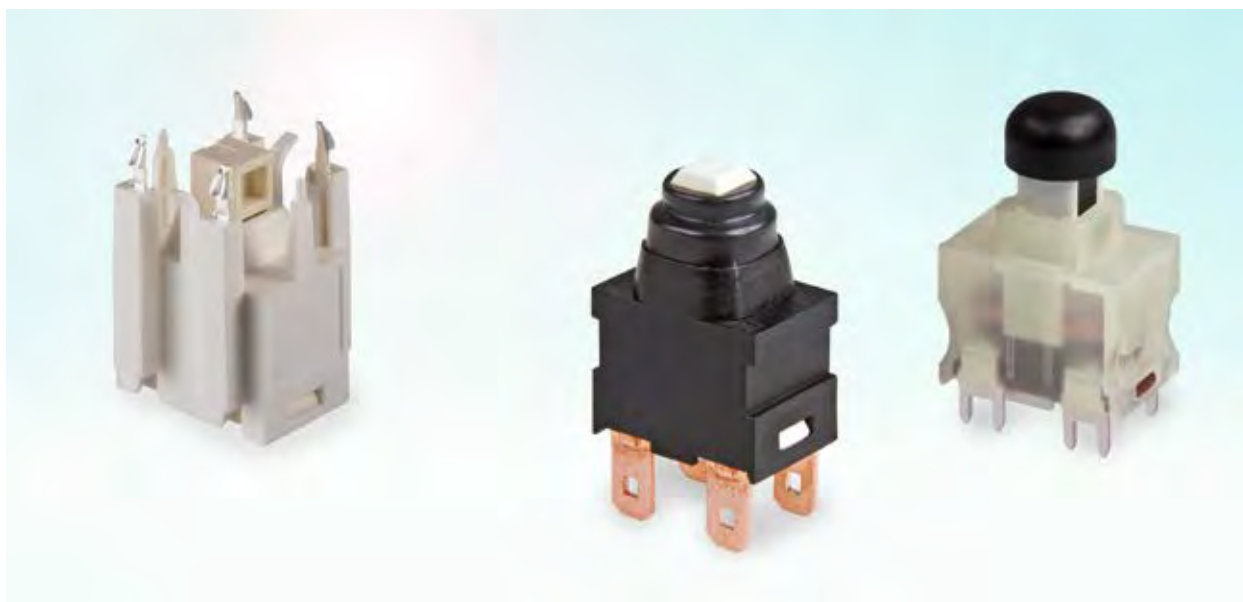






PRODUCT FEATURES

- ➔ Million times proven double lifting contact system with at least 100 000 mechanical switching cycles
- ➔ High electrical rating up to 16 A
- ➔ High mechanical load capacity up to 750 N (for foot actuation)
- ➔ Great variety
- ➔ Variable housing and pushbutton form with holders
- ➔ With pole separating wall (basic type 1689)

ON REQUEST


- ➔ Special plastics
- ➔ Other terminal variants
- ➔ Customized actuators and housing contours
- ➔ Cable assembly
- ➔ Behind PCB mountable variants

| | |
|---|---|
| Mechanical life endurance | 10E4 |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 |
| Ambient temperature | terminal side -20 °C ... +100 °C ... +105 °C ... +125 °C (product-dependent) actuating side -20 °C ... +55 °C |
| Flammability | UL 94 (actuator: V-0, socket: V-1, housing: V-2) UL 94 V-0 (product-dependent) |
| Glow wire test temperature | 850 °C |
| Material | actuator housing terminals |
| | PBTP / PA / PA (product-dependent) PA / PA glass fiber-reinforced / PA C3U / PA Latamid glass fiber-reinforced (product-dependent) silver plated / tinned / copper bare (product-dependent) |
| Plug force of the terminals | ≤ 80 N |
| Approval marks |  /  /  /  /  (product-dependent) |
| Suitable for appliances of protection class II | |



SERIES 1680 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES

TO 16 (4) A / 12 (12) A 250 V AC




























|  single-pole | 8 (8) A 250 V AC 1E4 | 16 (4) A 250 V AC 1E4 | 12 (12) A 250 V AC 5E4 | 12 (12) A 250 V AC 1E4 | 12 (8) A 250 V AC 1E4 | 10 (8) A 250 V AC 5E4 | 16 A 125 - 250 V AC | 12 A 125 - 250 V AC 1/2 HP | 5 A 125 V AC L | Terminal type | Terminal description | Contact distance (mm) | Contact material | Operating force (N) | Free position (FP) max. (mm) | Operating position (OP) (mm) | Permissible total travel position (TP) (mm) | EN 60335 cap. 30 conform "G" | Miscellaneous | Actuator description | Stock version |
|--|------------------------|-----------------------|------------------------|------------------------|-----------------------|-----------------------|---------------------|----------------------------|----------------|---------------|----------------------|-----------------------|------------------|---------------------|------------------------------|------------------------------|---|------------------------------|-------------------------|----------------------|---------------|
| | ON / OFF switch (SPST) | | | | | | | | | | | | | | | | | | | | |
| 1681.2102 | | | ○ | | | | | ○ | | | vertical | ≥ 3 | Ag | 7.0 ± 2.5 | 26.5 | 23.8 | 22.2 | ○ | resting pin | | |
| 1681.3104 | | | ○ | | | | | ○ | | | 4.8 horizontal | ≥ 3 | Ag | 7.0 ± 2.5 | 26.5 | 23.8 | 22.2 | ○ | | | |
| 1681.4403 | | | ○ | | | | | ○ | | | horizontal | ≥ 3 | Ag | 7.0 ± 2.5 | 24 | 21.3 | 19.7 | ○ | resting pin | | |
| 1681.4431 | | | ○ | | | ○ | | ○ | | | 5.3 long horizontal | ≥ 3 | Ag | 7.0 ± 2.5 | 24 | 21.3 | 19.8 | | flange on the end faces | | |
| 1681.1101 | | | | | ○ | ○ | | ○ | | | 4.8 vertical | ≥ 3 | Ag | 7.0 ± 2.5 | 26.5 | 23.8 | 22.2 | | | | ○ |
| 1681.1702 | | | | | ○ | ○ | | ○ | | | 4.8 vertical | ≥ 3 | Ag | 7.0 ± 2.5 | 24 | 21.3 | 19.7 | ○ | | | |
| 1681.3101 | | | | | ○ | ○ | | ○ | | | 4.8 horizontal | ≥ 3 | Ag | 7.0 ± 2.5 | 26.5 | 23.8 | 22.2 | | | | |
| 1681.3701 | | | | | ○ | ○ | | ○ | | | 4.8 horizontal | ≥ 3 | Ag | 7.0 ± 2.5 | 24 | 21.3 | 19.7 | | | | |
| 1681.4402 | | | | | ○ | ○ | | ○ | | | horizontal | ≥ 3 | Ag | 7.0 ± 2.5 | 24 | 21.3 | 19.7 | | rest pin | | |
| 1681.4701 | | | | | ○ | ○ | | ○ | | | horizontal | ≥ 3 | Ag | 7.0 ± 2.5 | 24 | 21.3 | 19.7 | | resting pin | | |
| 1681.5701 | | | | | | | | | | | | ≥ 3 | Ag | 7.0 ± 2.5 | 24 | 21.3 | 19.7 | | | | |
| Normally closed contact (SPNC) | | | | | | | | | | | | | | | | | | | | | |
| 1681.9408 | | | ○ | | | ○ | | | | | horizontal | ≥ 3 | Ag | 6.5 ± 1.5 | 26.85 | 29.4 | 22.8 | | resting pin | | |
| Normally open contact (SPNO) | | | | | | | | | | | | | | | | | | | | | |
| 1681.1354 | | | | | ○ | ○ | | ○ | | | 4.8 vertical | ≥ 3 | Au | 7.0 ± 2.5 | 24 | ≤ 21.3 | 19.7 | ○ | special housing contour | | |
| 1681.3501 | | | | | ○ | ○ | | ○ | | | 4.8 horizontal | ≥ 3 | Ag | 7.0 ± 2.5 | 24 | 21.3 | 19.7 | | | | |

ROCKER SWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 MICRO-SIGNAL SWITCHES
 SMIP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH N'DRIVE



SERIES 1680 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES

TO 16 (4) A / 12 (12) A 250 V AC

|  double-pole | 8 (8) A 250 V AC 1E4 | 16 (4) A 250 V AC 1E4 | 12 (12) A 250 V AC 5E4 | 12 (12) A 250 V AC 1E4 | 12 (8) A 250 V AC 1E4 | 10 (8) A 250 V AC 5E4 | 16 A 125 - 250 V AC | 12 A 125 - 250 V AC - 1/2 HP | 5 A 125 V AC L | Terminal type | Terminal description | Contact distance (mm) | Contact material | Operating force (N) | Free position (FP) max. (mm) | Operating position (OP) (mm) | Permissible total travel position (TP) (mm) | EN 60335 cap. 30 conform "G" | Miscellaneous | Actuator description | Stock version |
|--|-------------------------------|-----------------------|------------------------|------------------------|-----------------------|-----------------------|---------------------|------------------------------|----------------|---|----------------------|-----------------------|------------------|---------------------|------------------------------|------------------------------|---|------------------------------|-------------------------|---|---------------|
| | ON / OFF switch (DPST) | | | | | | | | | | | | | | | | | | | | |
| 1682.7704 | ○ | | | | | ○ | | | |  | 6.3 vertical | ≥ 3 | Ag | 9.0 ± 3 | 24 | 21.3 | 19.7 | ○ | |  | |
| 1689.3803 | ○ | | ○ | | ○ | ○ | ○ | | |  | 4.8 horizontal | ≥ 3 | Ag | 9.0 ± 3 | 24 | ≤ 20.95 | 19.7 | ○ | special housing contour |  | |
| 1682.1101 | | | | | ○ | ○ | ○ | | |  | 4.8 vertical | ≥ 3 | Ag | 9.0 ± 3 | 26.5 | 23.8 | 22.2 | | |  | |
| 1682.1702 | | | | | ○ | ○ | ○ | | |  | 4.8 vertical | ≥ 3 | Ag | 9.0 ± 3 | 24 | 21.3 | 19.7 | ○ | |  | |
| 1682.2701 | | | | | ○ | ○ | ○ | | |  | vertical | ≥ 3 | Ag | 9.0 ± 3 | 24 | 21.3 | 19.7 | | |  | |
| 1682.3101 | | | | | ○ | ○ | ○ | | |  | 4.8 horizontal | ≥ 3 | Ag | 9.0 ± 3 | 26.5 | 23.8 | 22.2 | | |  | |
| 1682.3702 | | | | | ○ | ○ | ○ | | |  | 4.8 horizontal | ≥ 3 | Ag | 9.0 ± 3 | 24 | 23.8 | 22.2 | ○ | |  | |
| 1682.6101 | | | | | ○ | ○ | ○ | | |  | 180° angled | ≥ 3 | Ag | 9.0 ± 3 | 24 | 21.3 | 19.8 | ○ | |  | |
| 1682.6401 | ○ | | | | | | | | |  | 180° angled | ≥ 3 | Ag | 10 ± 3 | 0.4 ± 0.3 | 2.3 ± 0.3 | 3.9 ± 0.3 | ○ | |  | |
| Normally open contact (DPNO) | | | | | | | | | | | | | | | | | | | | | |
| 1689.4202 | | ○ | | | ○ | ○ | ○ | | |  | horizontal | ≥ 3 | Ag | 9.0 ± 3 | 24 | ≤ 20.95 | 19.7 | ○ | rest pin |  | |
| 1682.1201 | | | | | ○ | ○ | ○ | | |  | 4.8 vertical | ≥ 3 | Ag | 9.0 ± 3 | 26.5 | 23.8 | 22.2 | | |  | |
| 1682.1902 | | | | | ○ | ○ | ○ | ○ | |  | 4.8 vertical | ≥ 3 | Ag | 9.0 ± 3 | 28.8 | 26.1 | 24.5 | | with cap 205.021.011 |  | |
| 1682.3201 | | | | | ○ | ○ | ○ | | |  | 4.8 horizontal | ≥ 3 | Ag | 9.0 ± 3 | 26.5 | 23.8 | 22.2 | | |  | |

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SWAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE




SERIES 1680 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES


TO 16 (4) A / 12 (12) A 250 V AC




Basic type 1681
single-pole

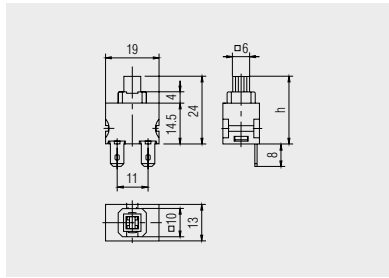


Quick-connect terminal 4.8 x 0.8
vertical
(actuator with holder for different caps)

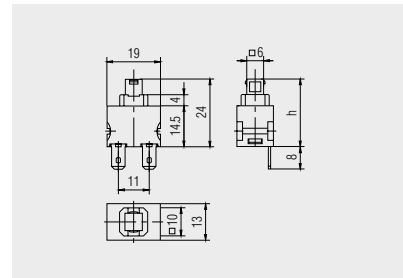


Quick-connect terminal 4.8 x 0.8
vertical (shortened actuator)

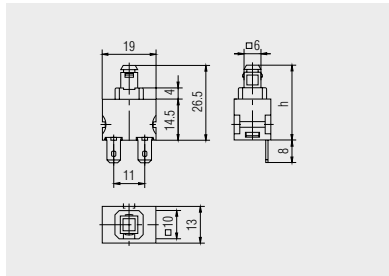


Quick-connect terminal 4.8 x 0.8
vertical (standard actuator)

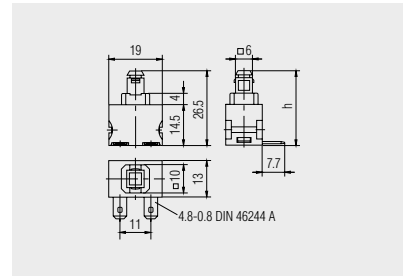

Quick-connect terminal 4.8 x 0.8
horizontal (standard actuator)

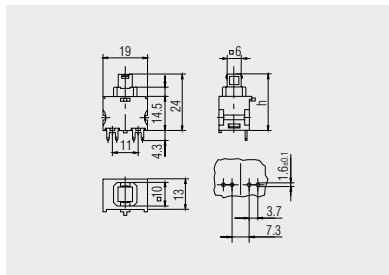

PCB terminal vertical

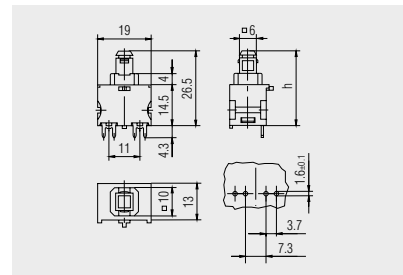

PCB terminal vertical
(standard actuator)

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH-N-DRIIVE




SERIES 1680 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES


TO 16 (4) A / 12 (12) A 250 V AC




Basic type 1681
single-pole

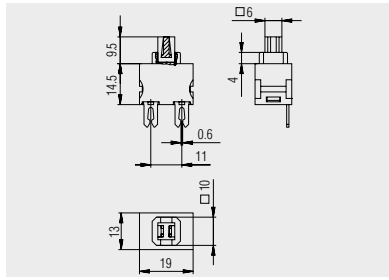


Cut terminal
(actuator with holder for different caps)

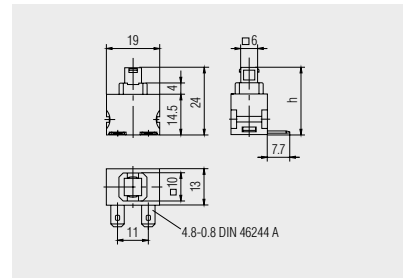


Quick-connect terminal 4.8 x 0.8
horizontal (shortened actuator)

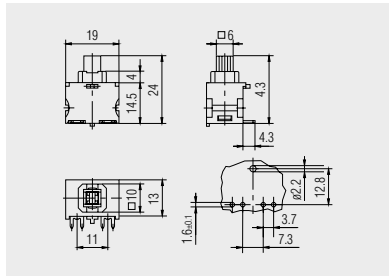

PCB terminal horizontal
(actuator with holder for different caps)

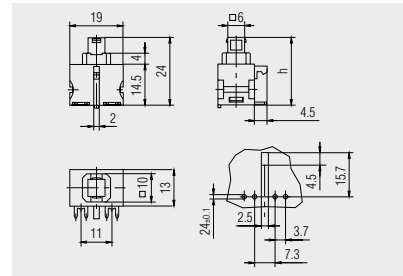

PCB terminal horizontal
(shortened actuator)

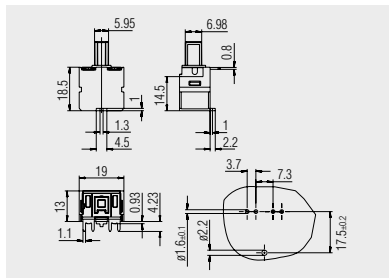

PCB terminal horizontal
1681.9408
normally closed contact SPNC
(actuator with holder for different caps)

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SWAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE




SERIES 1680 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES


TO 16 (4) A / 12 (12) A 250 V AC




Basic types 1682 and 1689 double-pole

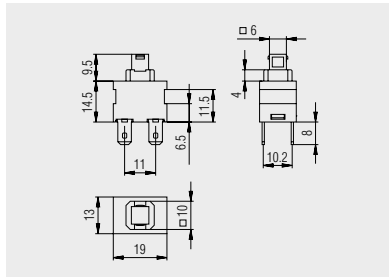


Quick-connect terminal 4.8 x 0.8 vertical (shortened actuator)

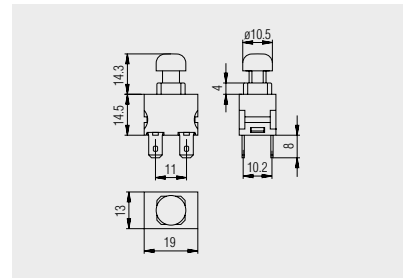


Quick-connect terminal 4.8 x 0.8 vertical (with mounted cap)

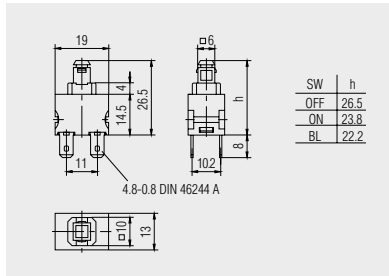


Quick-connect terminal 4.8 x 0.8 vertical (standard actuator)

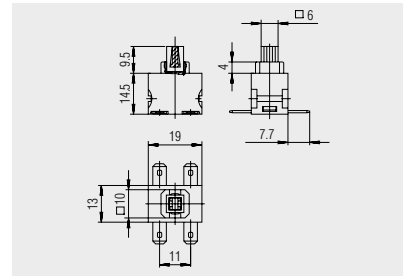

Quick-connect terminal 4.8 x 0.8 horizontal (actuator with holder for different caps)

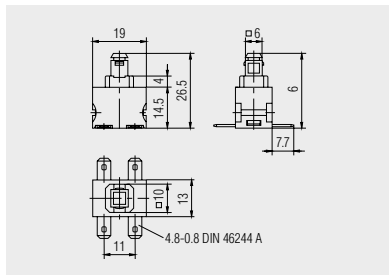

Quick-connect terminal 4.8 x 0.8 horizontal (standard actuator)

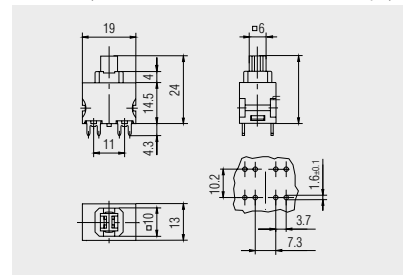

PCB terminal vertical (actuator with holder for different caps)

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNMP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH 'N' DRIVE




SERIES 1680 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES


TO 16 (4) A / 12 (12) A 250 V AC




Basic types 1682 and 1689 double-pole

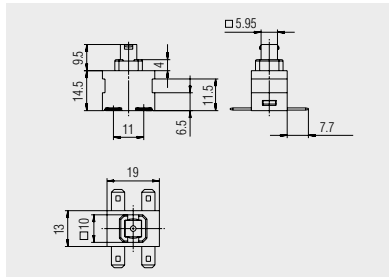


Quick-connect terminal 4.8 x 0.8 horizontal (shortened actuator without cut-out)

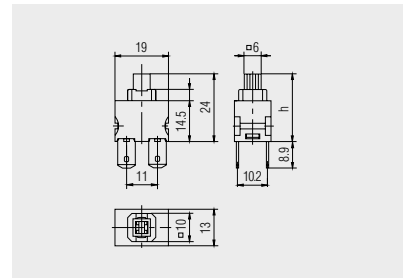

Quick-connect terminal 6.3 vertical (actuator with holder for different caps)

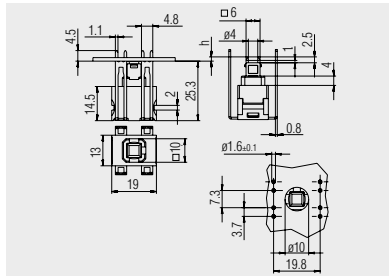

PCB terminal 180° angled (shortened actuator)

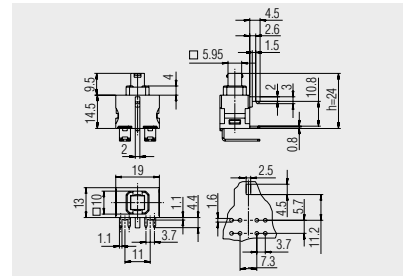

PCB terminal horizontal (shortened actuator without cut-out)

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SWAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE

➔ SERIES 1683 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES

TO 16 A 250 V AC



PRODUCT FEATURES

- ➔ Million times proven, double lifting contact system
- ➔ High electrical rating up to 16 A
- ➔ High rating with 100 000 mechanical switching cycles
- ➔ Illuminated and non-illuminated variants

ON REQUEST


- ➔ Other colors
- ➔ Printing
- ➔ Other lamp variants
- ➔ Snap-on customized actuators
- ➔ Other terminal variants (e.g. 6.3 x 0.8 mm)
- ➔ Cable assembly
- ➔ Variant with dust and water protection


| | |
|--|---|
| Mechanical life endurance | 10E4 |
| Operating force | approx. 8 N (basic type 1683) approx. 12 N |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Ambient temperature | terminal side -20 °C ... +100 °C actuating side -20 °C ... +55 °C |
| Flammability | UL 94 (actuator: V-0, socket: V-1, housing: V-2) UL 94 V-0 |
| Glow wire test temperature | 850 °C |
| Actuator | IP 40 IP 65 and IP 67 (product- dependent) |
| Material actuator housing | PC / EPDM / PA Latamid PA / PA glass fiber-reinforced / PA C3U / PA Latamid glass fiber-reinforced |
| Plug force of the terminals | ≤ 80 N |
| Approval marks | |
| Suitable for appliances of protection class II | |



SERIES 1683 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES

TO 16 A 250 V AC

|  single-pole | | Lighting voltage (V) | Actuator color / printing | 16 (4) A 250 V AC 1E4 | 12 (8) A 250 V AC 1E4 | 10 (8) A 250 V AC 5E4 | 12 A 125 - 250 V AC 1/2 HP | Terminal type | Terminal description | Contact distance (mm) | Contact material | Free position (FP) max. (mm) | Operating position (OP) (mm) | Permissible total travel position (TP) (mm) | Actuator | Miscellaneous | Stock version |
|--|-----|----------------------|---------------------------|-----------------------|-----------------------|-----------------------|----------------------------|---------------|----------------------|-----------------------|------------------|------------------------------|------------------------------|---|-----------------|------------------------------|-----------------------|
| ON / OFF switch (SPST) | | | | | | | | | | | | | | | | | |
| 1686.1101 | 230 | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | 23.9 | 20.85 | 19.7 | IP 40 | | |
| 1686.8104 | 230 | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | 28 | 25 | 23.8 | IP 65 and IP 67 | | |
| 1683.1101 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | 23.9 | 20.85 | 19.7 | IP 40 | | |
| 1683.8101 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | 28 | 25 | 23.8 | IP 65 and IP 67 | | |
| Normally open contact (SPNO) | | | | | | | | | | | | | | | | | |
| 1686.6155 | 24 | | <input type="radio"/> | | | | | | 4.8 / 2 x 2.8 | ≥ 3 | Au | 23.9 | 20.85 | 19.7 | IP 40 | lamp terminal (2.8) external | |
| 1683.1201 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | 23.9 | 20.85 | 19.7 | IP 40 | | <input type="radio"/> |
| 1683.1802 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | 23.5 | 20.45 | 19.3 | IP 40 | | |

|  double-pole | | Lighting voltage (V) | Actuator color / printing | 16 (4) A 250 V AC 1E4 | 12 (8) A 250 V AC 1E4 | 10 (8) A 250 V AC 5E4 | 12 A 125 - 250 V AC 1/2 HP | Terminal type | Terminal description | Contact distance (mm) | Contact material | Free position (FP) max. (mm) | Operating position (OP) (mm) | Permissible total travel position (TP) (mm) | Actuator | Miscellaneous | Stock version |
|--|-----|----------------------|---------------------------|-----------------------|-----------------------|-----------------------|----------------------------|---------------|----------------------|-----------------------|------------------|------------------------------|------------------------------|---|-----------------|------------------|-----------------------|
| ON / OFF switch (DPST) | | | | | | | | | | | | | | | | | |
| 1687.1104 | 230 | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | 23.9 | 20.85 | 19.7 | IP 40 | | <input type="radio"/> |
| 1684.1101 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | 23.9 | 20.85 | 19.7 | IP 40 | | |
| 1684.1701 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | 23.5 | 20.45 | 19.3 | IP 40 | snap-on actuator | |
| 1684.1801 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | 23.5 | 20.45 | 19.3 | IP 40 | | |
| Normally open contact (SPNO) | | | | | | | | | | | | | | | | | |
| 1684.8202 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | 28 | 25 | 23.8 | IP 65 and IP 67 | | |

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'DRIVE




SERIES 1683 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES

TO 16 A 250 V AC




Basic type 1683
single-pole
non-illuminated




X = Wall thickness


| x | y | z |
|---------------|----------------------|----------------------|
| 0.75 ... 1.25 | 19.2 ^{-0.1} | 12.9 ^{+0.1} |
| 1.25 ... 2 | 19.4 ^{-0.1} | 12.9 ^{+0.1} |
| 2 ... 3 | 19.8 ^{-0.1} | 12.9 ^{+0.1} |

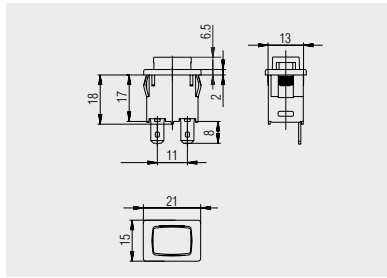

Quick-connect terminal 4.8 x 0.8

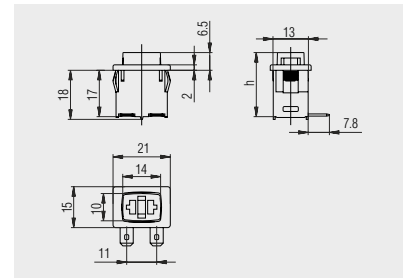


Quick-connect terminal 4.8 x 0.8
horizontal

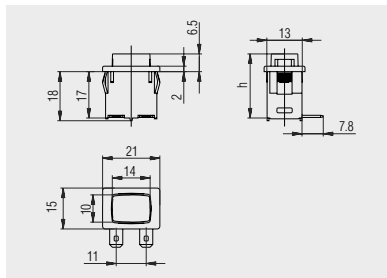

Quick-connect terminal 4.8 x 0.8
horizontal




Basic types 1683, 1684,
1686 and 1687
single and double-pole
illuminated / non-illuminated



X = Wall thickness

| x | y | z |
|-------------|----------------------|----------------------|
| 1.0 ... 2.0 | 19.8 ^{-0.1} | 12.9 ^{+0.1} |

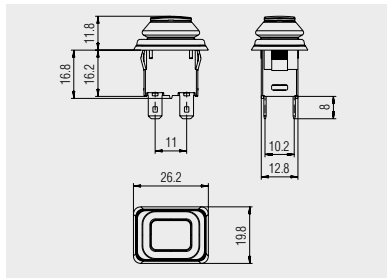

Quick-connect terminal 4.8 x 0.8
1686.8101 and 1683.8104 with
bellows for IP 65/IP 67

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH 'N' DRIVE




SERIES 1683 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES

TO 16 A 250 V AC




Basic types 1683, 1684, 1686 and 1687
single and double-pole
illuminated / non-illuminated




X = Wall thickness


| x | y | z |
|---------------|----------------------|----------------------|
| 0.75 ... 1.25 | 19.2 ^{-0.1} | 12.9 ^{+0.1} |
| 1.25 ... 2 | 19.4 ^{-0.1} | 12.9 ^{+0.1} |
| 2 ... 3 | 19.8 ^{-0.1} | 12.9 ^{+0.1} |

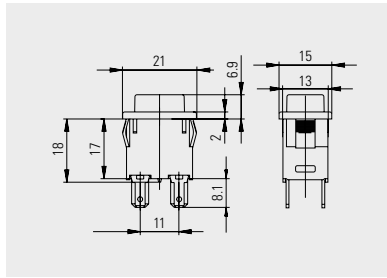


Quick-connect terminal 4.8 x 0.8
/ 2 x 2.8 x 0.8 with external lamp
1686.6155

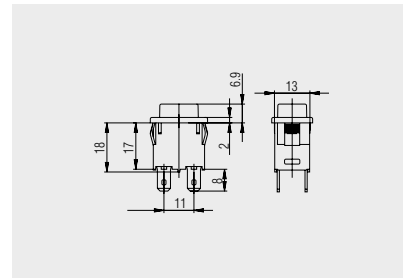


Quick-connect terminal 4.8 x 0.8
1684.1101, 1684.1104, 1684.1201,
basic types 1687 and 1686

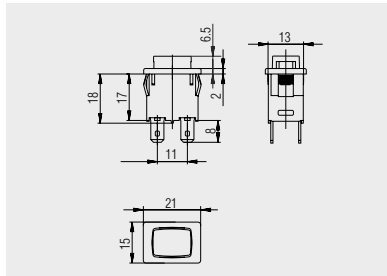

Quick-connect terminal 4.8 x 0.8
basic type 1684

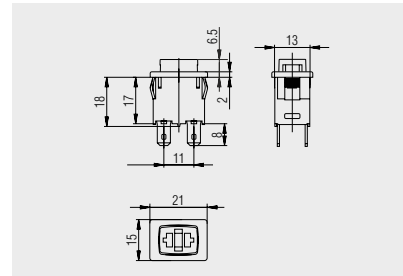


Quick-connect terminal 4.8 x 0.8
basic type 1684

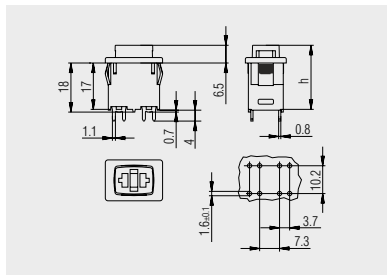

PCB terminal vertical
1684.2701



Protection cap
203.701.011

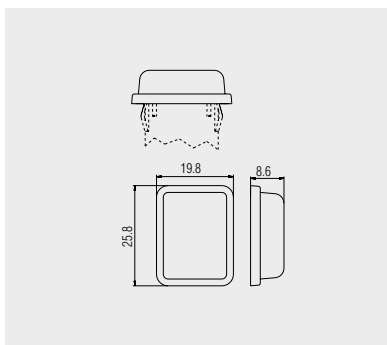

Transparent PVC-protection cap for
dust and water protection from the
actuation side

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE



SERIES 1691 - SMALLEST SINGLE-POLE PUSHBUTTON SWITCHES

FOR LOW VOLTAGES

PRODUCT FEATURES


- Small compact pushbutton switch for indirect actuation
- High rating with 100 000 mechanical cycles
- Pushbutton snapping on customized actuators

ON REQUEST


- For mains applications
- Customized actuators
- Different operating force

| | |
|---|---------------------------------|
| Mechanical life endurance | 10E4 |
| Operating force | 6.0 ±1.0 N |
| Ambient temperature | terminal side -25 °C ... +70 °C |
| Material actuator housing terminals | PA PA silver plated |


| | Actuator color / printing | Housing color | 5 mA 30 V | Terminal type | Terminal description | Contact distance (mm) | Contact material | Free position (FP) max. (mm) | Operating position (OP) (mm) | Permissible total travel position (TP) (mm) | Miscellaneous | Stock version |
|------------------------------|---------------------------|---------------|-----------|---------------|----------------------|-----------------------|------------------|------------------------------|------------------------------|---|---------------|---------------|
| ON / OFF switch (SPST) | | | | | | | | | | | | |
| 1691.2101 | ■ | ■ | ○ | U | | < 3 | Au | 26.3 | ≤ 23.9 | 22.5 | | |
| Normally open contact (SPNO) | | | | | | | | | | | | |
| 1691.3201 | ■ | ■ | ○ | U | 2.8 x 0.5 | < 3 | Au | 24.8 | ≤ 22.4 | 21 | | |



Basic type 1691

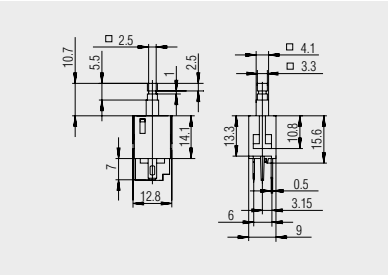

Quick-connect terminal 2.8 x 0.5

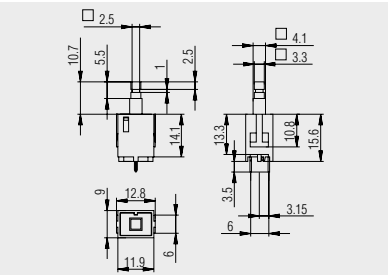


PCB terminal

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
TACT-ACTION SWITCHES
SMAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH-N-DRIVE



SERIES 1247 - DOUBLE-POLE PUSHBUTTON SWITCHES

TO 7 (7) A 250 V AC

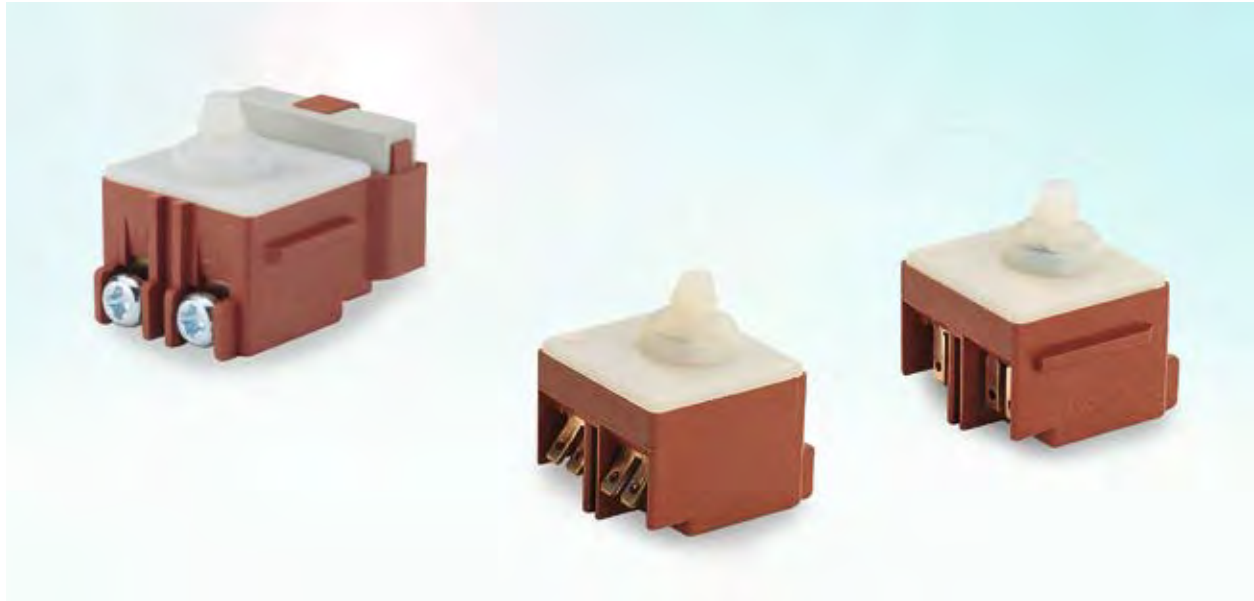

PRODUCT FEATURES

- Powerful single and double-pole pushbutton switch up to 10 A 125 V AC
- Optionally with fastening strip and interference suppression capacitor
- Support point terminal (single-pole normally open contact)
- Dust-protected

ON REQUEST




- Other terminal types




| | |
|---|---|
| Mechanical life endurance | 1E5 |
| Actuator | IP 40 |
| Material actuator housing | PA glass fiber-reinforced Desmopan / PA glass fiber-reinforced |
| Approval marks | |
| Suitable for appliances of protection class II | |




SERIES 1247 - DOUBLE-POLE PUSHBUTTON SWITCHES


TO 7 (7) A 250 V AC


|  single-pole | 10 (10) A 127 V AC 5E4 7 (7) A 250 V AC 5E4 10 A 125 V AC 5 A 250 V AC | | | | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
|--|---|---|---|---|---|--|-----------------------|------------------|---------------|---------------|
| | Normally open contact (SPNO) | | | | | | | | | |
| 1247.0102 | ○ | ○ | ○ | ○ |  | 2 x M3.5 2 x St 2.8 angled 2 x St 2.8 angled | ≥ 3 | Ag | without strip | |
| 1247.0301 | ○ | ○ | ○ | ○ |  | 2 x M3.5 2 x 2.8 x 0.8 2 x 2.8 x 0.8 | ≥ 3 | Ag | with strip | |


|  double-pole | 10 (10) A 127 V AC 5E4 7 (7) A 250 V AC 5E4 10 A 125 V AC 5 A 250 V AC | | | | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
|--|---|---|---|---|---|--|-----------------------|------------------|---|---------------|
| | Normally open contact (DPNO) | | | | | | | | | |
| 1247.2102 | ○ | ○ | ○ | ○ |  | 2 x M3.5 2 x St 2.8 angled 2 x St 2.8 angled | ≥ 3 | Ag | without strip without support terminal | |
| 1247.2301 | ○ | ○ | ○ | ○ |  | 2 x M3.5 2 x 2.8 x 0.8 2 x 2.8 x 0.8 | ≥ 3 | Ag | with strip without support terminal | |




Basic type 1247



 Screw terminal mains side
Quick-connect terminal motor side
Quick-connect terminal additional connection with strip
1247.0301 and 1247.2301

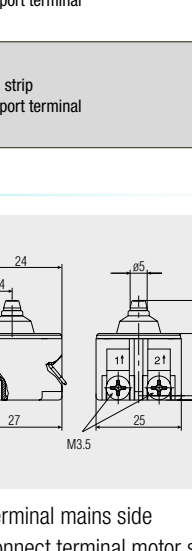

 Screw terminal mains side
Quick-connect terminal motor side
Quick-connect terminal additional connection without strip
1247.2102 and 1247.0102

ROTARY SWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 MICRO-SIGNAL SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH IN DRIVE



SERIES 5000 - ROUND PUSHBUTTON SWITCHES

FOR AT LEAST 200 000 MECHANICAL SWITCHING CYCLES






PRODUCT FEATURES

- Attractive, round pushbutton switch
- Efficient contact system at least 200 000 mechanical switching cycles
- Variants with sealing cap for IP 54 dust and water protection
- Appliance cut-out with diameter 16 mm, alternatively with fixing pin

ON REQUEST



- Other colors
- Actuator printing
- Snap-on for greater wall thickness
- Cable assembly


| | |
|---|---|
| Mechanical life endurance | 20E4 |
| Proof tracking | 250 PTI |
| Protection type | IP 40 IP 54 (in variants with sealing cap) |
| Ambient temperature | terminal side -20 °C ... +85 °C actuating side -20 °C ... +55 °C |
| Flammability | UL 94 V-2 |
| Glow wire test temperature | 850 °C |
| Material actuator housing terminals | PA glass fiber-reinforced PA glass fiber-reinforced silver plated |
| Type of fastening | Snap fastening |
| Plug force of the terminals | ≤ 64 N |
| Approval marks |  /  /  |
| Suitable for appliances of protection class II | |




SERIES 5000 - ROUND PUSHBUTTON SWITCHES

FOR AT LEAST 200 000 MECHANICAL SWITCHING CYCLES


|  single-pole  | Actuator color / printing | Housing color | Terminal type | Terminal description | Contact distance (mm) | Contact material | Pretravel max. (mm) | Total travel / stroke (mm) | Miscellaneous | Stock version |
|---|------------------------------|---------------|---------------|----------------------|-----------------------|------------------|---------------------|----------------------------|-----------------------------------|---------------|
| | Normally open contact (SPNO) | | | | | | | | | |
| 5000.0101 | | | | 2.8 | ≥ 3 | Ag | 2.0 ± 0.4 | 4.0 | | |
| 5000.0103 | | | | 2.8 | ≥ 3 | Ag | 2.0 ± 0.4 | 4.0 | | |
| 5000.0104 | | | | 2.8 | ≥ 3 | Ag | 2.0 ± 0.4 | 4.0 | | |
| 5000.0211 | | | | 2.8 | ≥ 3 | Ag | 2.0 ± 0.4 | 4.0 | fixing pin | |
| 5000.0212 | | | | 2.8 | ≥ 3 | Ag | 2.0 ± 0.4 | 4.0 | fixing pin | |
| 5000.0501 | | | | 2.8 | ≥ 3 | Ag | 2.0 ± 0.4 | 4.0 | fixing pin with IP 54 sealing cap | |




Basic type 5000

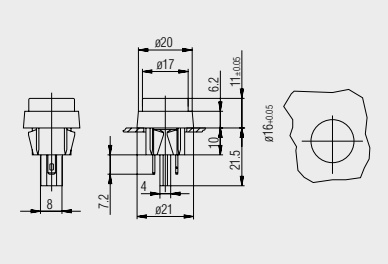


Quick-connect terminal 2.8 x 0.8

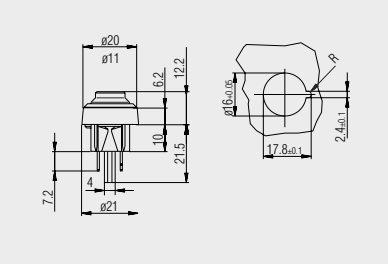

Quick-connect terminal 2.8 x 0.8 (with fixing pin and IP 54 sealing cap) 5000.0501

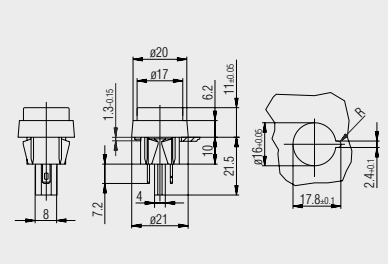

Quick-connect terminal 2.8 x 0.8 (with fixing pin) 5000.0211 and 5000.0212



X = Wall thickness

| x | Ø |
|-------------|-----------------------|
| 1.4 ... 1-7 | 16.0 ^{+0.05} |

ROTARY SWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 MICRO-SIGNAL SWITCHES
 SMP-ACTION SWITCHES
 SENSORS
 ECO
 PUSH N'DRIVE



SERIES 1846 - SINGLE-POLE PUSHBUTTON SWITCHES

TO 2 (1) A 250 V AC



PRODUCT FEATURES

- Small, compact pushbutton switch
- Long life endurance with 500 000 mechanical switching cycles
- Special design for dust and water protection

ON REQUEST

















- Other colors
- With printing
- Other terminal variants
- Cable assembly


| | |
|---|---|
| Mechanical life endurance | 50E4 |
| Operating force | approx. 1 N ≤ 4.0 N (1846.0204) |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 |
| Ambient temperature | terminal side -20 °C ... +85 °C actuating side -20 °C ... +55 °C |
| Flammability | UL 94 V-2 |
| Glow wire test temperature | 850 °C |
| Material actuator housing terminals | PA PA silver plated / tinned |
| Bearing terminal | silver plated tinned |
| Plug force of the terminals | ≤ 80 N |
| Approval marks | |
| Suitable for appliances of protection class II | |




SERIES 1846 - SINGLE-POLE PUSHBUTTON SWITCHES


TO 2 (1) A 250 V AC


| | | | | | | | | | | |
|--|---|---|---|---|---|----------------------|-----------------------|----------------------------|------------------------------------|---------------|
|  single-pole | Actuator color / printing | Housing color | 2 (1) A 250 V AC 5E4 | 30 mA 12 V DC 5E4 | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
| | Normally open contact (SPNO) | | | | | | | | | |
| | 1846.0201 |  |  | ○ |  | | < 3 | Ag | | ○ |
| | 1846.2201 |  |  | ○ |  | | < 3 | Ag | | |
| | 1846.3201 |  |  | ○ |  | 2.8 x 0.5 | < 3 | Ag | | ○ |
| | 1846.2251 |  |  | ○ |  | | < 3 | Au | electrical life endurance: 500 000 | |
| 1846.0204 |  |  | |  | | < 3 | Ag | switch actuating force 4 N | | |




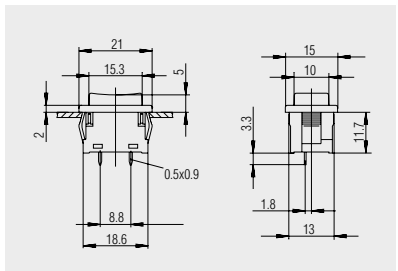
Basic type 1846

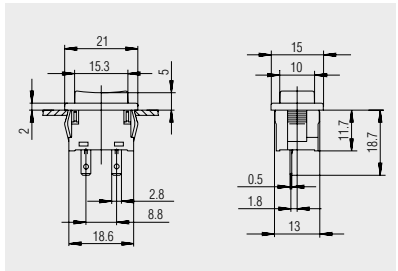



 Quick-connect terminal 2.8 x 0.5

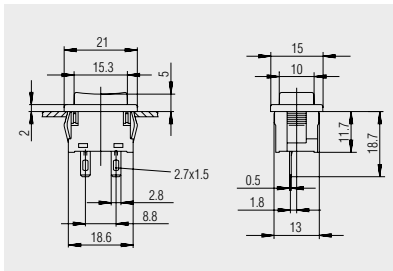

 Solder terminal




 PCB terminal




X = Wall thickness

| x | y | z |
|---------------|----------------------|----------------------|
| 0.75 ... 1.25 | 19.2 ^{-0.1} | 12.9 ^{+0.1} |
| 1.25 ... 2 | 19.4 ^{-0.1} | 12.9 ^{+0.1} |
| 2 ... 3 | 19.8 ^{-0.1} | 12.9 ^{+0.1} |



Protection cap
203.089.011

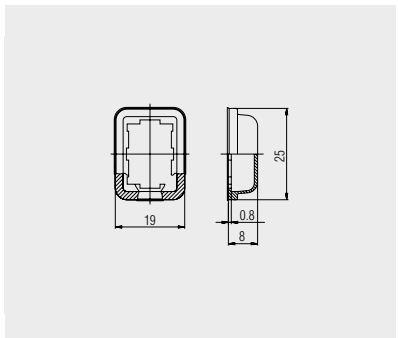

Transparent PVC-protection cap.
Serves as dust and water protection
for the actuating side.

ROTARY SWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 MICRO-SIGNAL SWITCHES
 SMIP-ACTION SWITCHES
 SENSORS
 ECO
 PUSH-IN DRIVE

➔ SERIES 1840 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES

TO 6 (4) A 250 V AC




PRODUCT FEATURES

- ➔ 100 million times proven switching principle with long life endurance with 100 000 mechanical switching cycles
- ➔ Fastening by round nut M12
- ➔ Excellent actuating characteristic
- ➔ Variant for snapping on customized pushbuttons

ON REQUEST


- ➔ Higher power with 6 (6) A 250 V AC
- ➔ Other terminal types
- ➔ Cable assembly

| | |
|--|---|
| Mechanical life endurance | 10E4 |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 |
| Ambient temperature | terminal side -20 °C ... +100 °C actuating side -20 °C ... +55 °C |
| Flammability | UL 94 V-2 |
| Glow wire test temperature | 850 °C |
| Material actuator housing terminals | PA PA glass fiber-reinforced / PA silver plated |
| Plug force of the terminals | ≤ 80 N |
| Approval marks |  |
| Suitable for appliances of protection class II | |



SERIES 1840 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES

TO 6 (4) A 250 V AC


|  single-pole | Actuator color / printing | Housing color | 6 (4) A 250 V AC 5E4 | 6 (2) A 250 V AC 5E4 | 6 A 250 V AC 1/2 HP | 6 A 125 V AC 1/4 HP | 6 A 125 - 250 V AC 1/8 HP | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
|--|---------------------------|----------------------|-----------------------|-----------------------|-----------------------|---------------------------|---------------------------|----------------------|-----------------------|-----------------------|------------------|------------------------------------|-----------------------|
| | Actuator color / printing | Housing color | 6 (4) A 250 V AC 5E4 | 6 (2) A 250 V AC 5E4 | 6 A 250 V AC 1/2 HP | 6 A 125 V AC 1/4 HP | 6 A 125 - 250 V AC 1/8 HP | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
| ON / OFF switch (SPST) | | | | | | | | | | | | | |
| 1841.1101 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | | <input type="radio"/> |
| 1841.6101 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | snap-on actuator caps see page 119 | |
| Normally closed contact (SPNC) | | | | | | | | | | | | | |
| 1841.1301 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | | <input type="radio"/> |
| Normally open contact (SPNO) | | | | | | | | | | | | | |
| 1841.1201 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | | <input type="radio"/> |
| Changeover switch (SPDT) | | | | | | | | | | | | | |
| 1843.1101 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | | |
| Changeover switch (SPDT momentary) | | | | | | | | | | | | | |
| 1843.1201 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | | <input type="radio"/> |
| double-pole | | | | | | | | | | | | | |
| Actuator color / printing | Housing color | 6 (4) A 250 V AC 5E4 | 6 (2) A 250 V AC 5E4 | 6 A 250 V AC 1/2 HP | 6 A 125 V AC 1/4 HP | 6 A 125 - 250 V AC 1/8 HP | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version | |
| ON / OFF switch (DPST) | | | | | | | | | | | | | |
| 1842.1101 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | | |
| 1842.6101 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | snap-on actuator caps see page 119 | |

ROTARY SWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SNAP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH N'DRIVE




SERIES 1840 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES

TO 6 (4) A 250 V AC

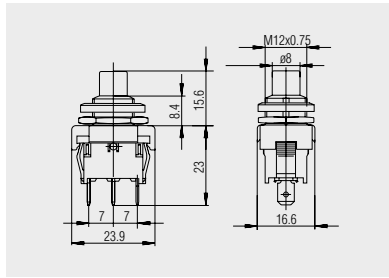


Basic types 1841 and 1843
single-pole

Quick-connect terminal 4.8 x 0.8

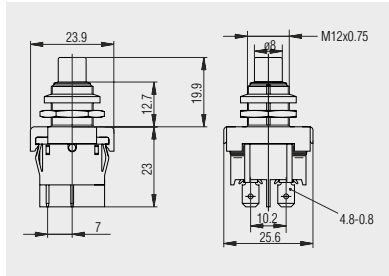


Basic type 1842
double-pole

Quick-connect terminal 4.8 x 0.8

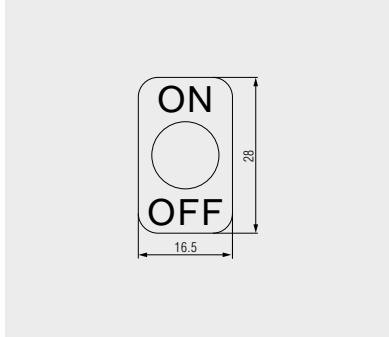

Identification plate
240.001.011

Aluminum identification plate to plugging on and with black inscription "ON" and "OFF"

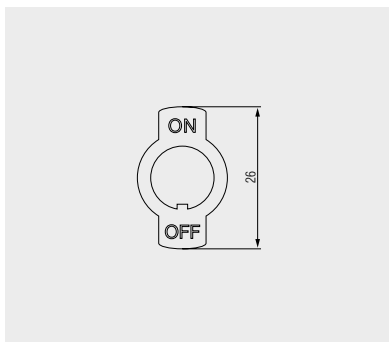

Identification plate
240.002.011

Identification plate made of CuZn nickel-plated for plugging on as well as with twist protection and stamped inscription "ON" and "OFF"

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS



ECO

PUSH'N'DRIVE





SERIES 1840 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES

TO 6 (4) A 250 V AC

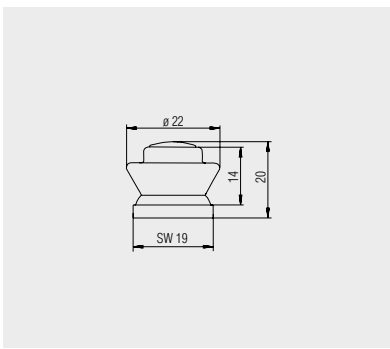



Neopren®-cap for pushbutton (M12 x 0.75) basic type 1840 as dust and water protection. Pushbutton plate on top of cap is CuZn nickel plated.

Protection cap
343.002.023

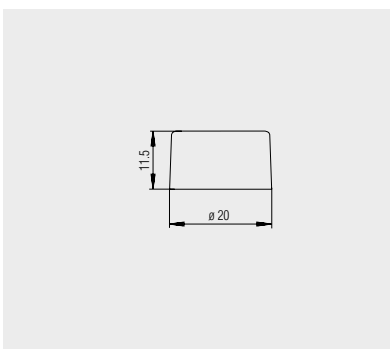

Pushbutton made of PA black, with diameter 20 mm for assembly by customer on 1841.6101 and 1842.6101

Pushbutton
205.008.011

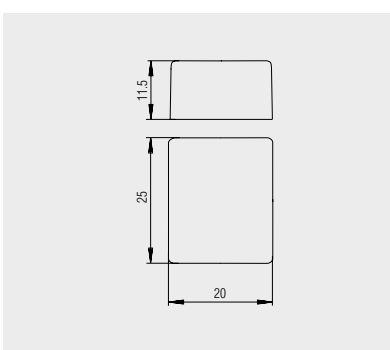


Pushbutton made of PA black, rectangular 20 x 25 mm for assembly by customer on 1841.6101 and 1842.6101

Pushbutton
203.106.011

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH N' DRIVE

➔ SERIES 1660 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES

TO 16 (4) A 250 V AC

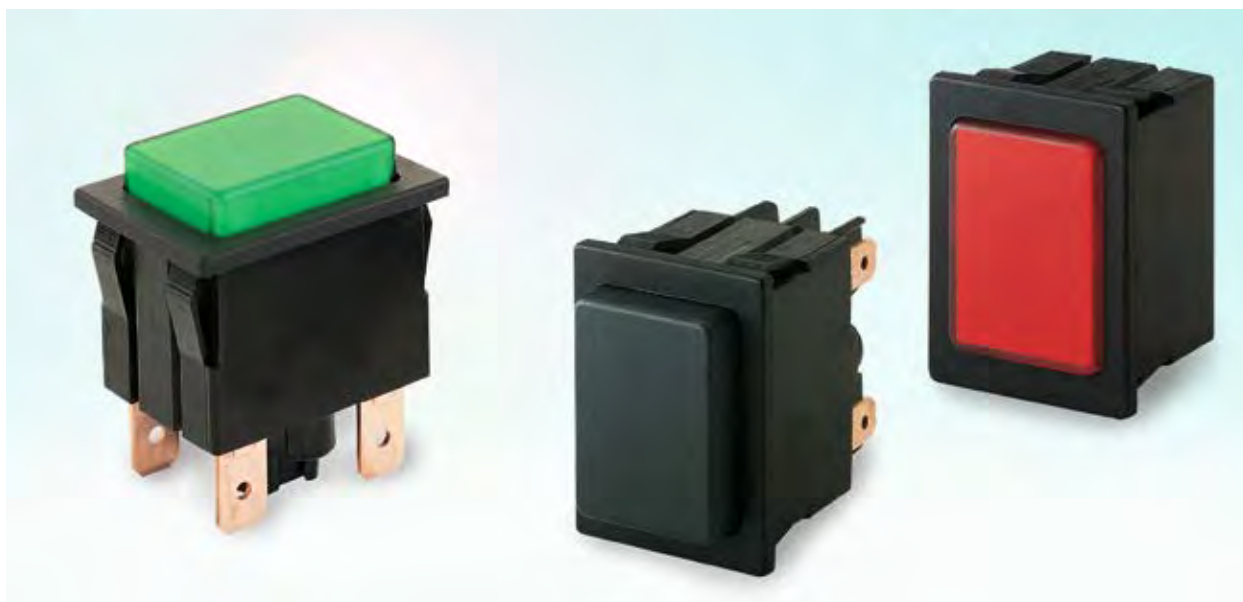

PRODUCT FEATURES

- ➔ Illuminated and non-illuminated pushbutton switches
- ➔ Proven jump contact switching system (double interrupting)
- ➔ Opening and closing speed independent of the actuating speed
- ➔ Product-dependent with external lamp terminal

ON REQUEST


- ➔ Other colors
- ➔ Other printing variants
- ➔ Other terminal types
- ➔ Other lamp variants
- ➔ Cable assembly


| | |
|---|---|
| Mechanical life endurance | 5E4 |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 |
| Ambient temperature | terminal side -20 °C ... +85 °C actuating side -20 °C ... +55 °C |
| Flammability | UL 94 V-2 |
| Glow wire test temperature | 850 °C |
| Material actuator housing terminals | PC (product-dependent) / PA PA / PA glass fiber-reinforced (product-dependent) Cu |
| Plug force of the terminals | ≤ 80 N |
| Approval marks | UL / VDE / CE (product-dependent) / CCC |
| Suitable for appliances of protection class II | |



SERIES 1660 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES

TO 16 (4) A 250 V AC

|  single-pole | | Lighting voltage (V) | Actuator color / printing | Housing color | 16 (4) A 250 V AC 1E4 | 16 (4) A 250 V AC | 12 (4) A 250 V AC 1E4 | 12 A 250 V AC 1/2 HP | 12 A 125 V AC 1/6 HP | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
|--|-----|----------------------|---------------------------|---------------|-----------------------|-------------------|-----------------------|----------------------|----------------------|---------------|----------------------|-----------------------|------------------|------------------------|---------------|
| ON / OFF switch (SPST) | | | | | | | | | | | | | | | |
| 1662.0201 | | | | | o | | | | | | 6.3 | ≥ 3 | Ag | | |
| Normally open contact (SPNO) | | | | | | | | | | | | | | | |
| 1665.3102 | 230 | | | | o | | | | | | 6.3 / 2 x 4.8 | ≥ 3 | Ag | external lamp terminal | |
| 1662.0101 | | | | | o | | | | | | 6.3 | ≥ 3 | Ag | | o |
| Changeover switch (SPDT momentary) | | | | | | | | | | | | | | | |
| 1664.0101 | | | | | | o | | | | | 4.8 | < 3 | Ag | | |






|  double-pole | | Lighting voltage (V) | Actuator color / printing | Housing color | 16 (4) A 250 V AC 1E4 | 16 (4) A 250 V AC | 12 (4) A 250 V AC 1E4 | 12 A 250 V AC 1/2 HP | 12 A 125 V AC 1/6 HP | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
|--|-----|----------------------|---------------------------|---------------|-----------------------|-------------------|-----------------------|----------------------|----------------------|---------------|----------------------|-----------------------|------------------|------------------------|---------------|
| ON / OFF switch (DPST) | | | | | | | | | | | | | | | |
| 1660.0201 | 230 | | | | o | | | | | | 6.3 | ≥ 3 | Ag | | o |
| 1660.0202 | 230 | | | | o | | | | | | 6.3 | ≥ 3 | Ag | | o |
| 1660.3202 | 230 | | | | o | | | | | | 6.3 / 2 x 4.8 | ≥ 3 | Ag | external lamp terminal | |
| 1660.0222 | 110 | | | | | | | | o | | 6.3 | ≥ 3 | Ag | | |
| 1661.0220 | | | | | | o | o | o | | | 6.3 | ≥ 3 | Ag | | |
| Normally open contact (DPNO) | | | | | | | | | | | | | | | |
| 1661.0101 | | | | | o | | | | | | 6.3 | ≥ 3 | Ag | | o |
| Changeover switch (DPDT momentary) | | | | | | | | | | | | | | | |
| 1663.0101 | | | | | | o | | | | | 4.8 | < 3 | Ag | | o |

ROTARY SWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 MICRO-SIGNAL SWITCHES
 SNAP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH-IN DRIVE




SERIES 1660 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES

TO 16 (4) A 250 V AC

| | | | | | | | | | | | | | | |
|---|----------------------|---|---------------|-----------------------|-------------------|-----------------------|----------------------|----------------------|---|----------------------|-----------------------|------------------|---------------|---------------|
|  Lamp | Lighting voltage (V) | Actuator color / printing | Housing color | 16 (4) A 250 V AC 1E4 | 16 (4) A 250 V AC | 12 (4) A 250 V AC 1E4 | 12 A 250 V AC 1/2 HP | 12 A 125 V AC 1/6 HP | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
| | Lamp | | | | | | | | | | | | | |
| 1667.0101 | 230 |  | | | | | | |  | 6.3 | | | | |
| 1667.0102 | 230 |  | | | | | | |  | 6.3 | | | | |





Basic types 1660, 1661 and 1663 double-pole illuminated / non-illuminated





X = Wall thickness


| x | y | z |
|--------------|----------------------|----------------------|
| 0.75 ... 1.0 | 30 ^{+0.1} | 22.2 ^{+0.2} |
| 1.0 ... 1.5 | 30.2 ^{+0.1} | 22.2 ^{+0.2} |
| 1.5 ... 3.0 | 30.4 ^{+0.1} | 22.2 ^{+0.2} |

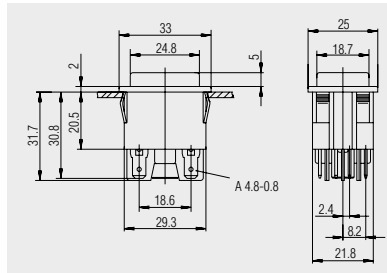


 Quick-connect terminal 4.8 x 0.8

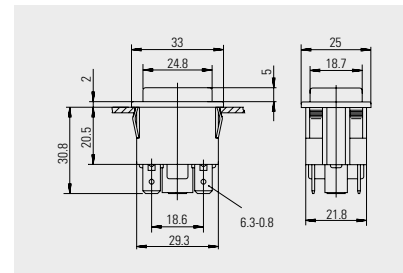

 Quick-connect terminal 6.3 x 0.8

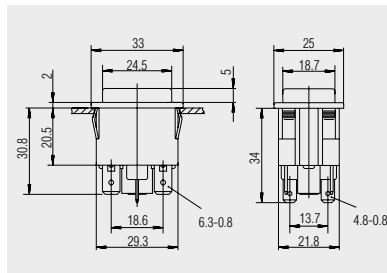

 Quick-connect terminal 6.3 x 0.8 / 2 x 4.8 x 0.8 with external lamp terminal




SERIES 1660 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES


TO 16 (4) A 250 V AC



Basic type 1667
lamp

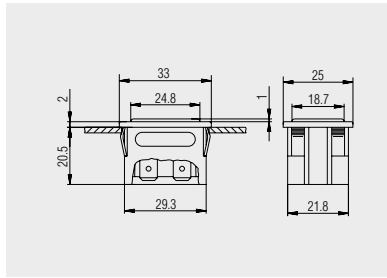

Quick-connect terminal 6.3 x 0.8




X = Wall thickness

| x | y | z |
|--------------|----------------------|----------------------|
| 0.75 ... 1.0 | 30 ^{+0.1} | 22.2 ^{+0.2} |
| 1.0 ... 1.5 | 30.2 ^{+0.1} | 22.2 ^{+0.2} |
| 1.5 ... 3.0 | 30.4 ^{+0.1} | 22.2 ^{+0.2} |




Gasket
340.040.011

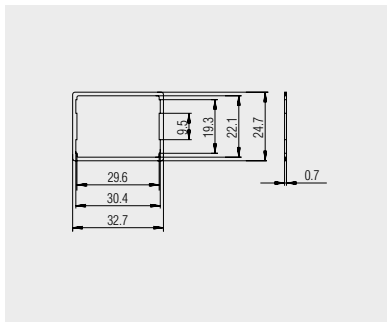

Gasket made of EPDM black for sealing between switch and appliance for increased dust and water protection




Protection cap
203.201.011

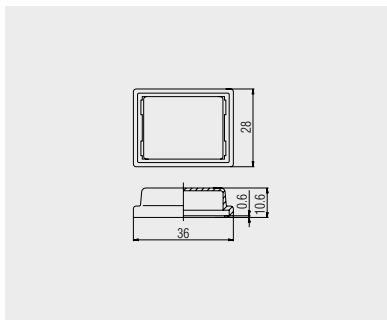

Transparent PVC-protection cap for switches of the basic types 1660, 1662, 1663, 1664, 1665 and 1667. Serves as dust and water protection of the actuation side.



Dummy piece
203.028.013

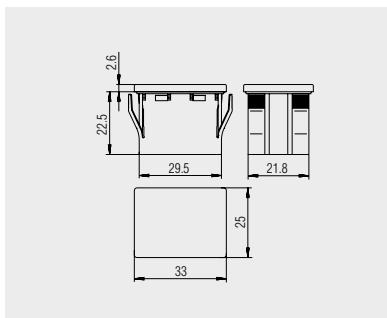

Dummy piece for size of basic type 1667 made of PA with housing and cover in black and with mounted gasket (340.040.011) for dust and water protection.

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SMAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH N' DRIVE

➔ SERIES 1670 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES

TO 16 (4) A 250 V AC




PRODUCT FEATURES

- ➔ Illuminated and non-illuminated pushbutton switch
- ➔ Internal gasket for IP 54
- ➔ Proven jump contact switching system (double interrupting)
- ➔ Opening and closing speed independent of the actuating speed
- ➔ Product-dependent with external lamp terminal

ON REQUEST



- ➔ Other colors
- ➔ Other printing variants
- ➔ Other terminal types
- ➔ Other lamp variants
- ➔ Cable assembly
- ➔ Approval mark UL



| | |
|---|---|
| Mechanical life endurance | 5E4 1E4 |
| Operating force | approx. 8 N |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 54 |
| Ambient temperature | terminal side -20 °C ... +85 °C actuating side -20 °C ... +55 °C |
| Flammability | UL 94 V-2 |
| Glow wire test temperature | 850 °C |
| Material actuator housing terminals | PC (product-dependent) / PA PA / PA glass fiber-reinforced (product-dependent) Cu |
| Plug force of the terminals | ≤ 80 N |
| Approval marks |  |
| Suitable for appliances of protection class II | |



SERIES 1670 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES

TO 16 (4) A 250 V AC

|  single-pole  | | Lighting voltage (V) | Actuator color / printing | Housing color | 16 (4) A 250 V AC 1E4 | 12 (4) A 250 V AC 1E4 | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
|---|-----|----------------------|---------------------------|---------------|-----------------------|-----------------------|---------------|----------------------|-----------------------|-------------------------|---------------|---------------|
| Normally open contact (SPNO) | | | | | | | | | | | | |
| 1675.5315 | 230 | | | | | | 6.3 / 2 x 4.8 | ≥ 3 | Ag | external lamp terminals | | |
| 1672.5101 | | | | | | | 6.3 | ≥ 3 | Ag | | | |
| Changeover switch (SPDT) | | | | | | | | | | | | |
| 1673.5501 | | | | | | | 4.8 | < 3 | Ag | | | |








|  double-pole  | | Lighting voltage (V) | Actuator color / printing | Housing color | 16 (4) A 250 V AC 1E4 | 12 (4) A 250 V AC 1E4 | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
|--|-----------|----------------------|---------------------------|---------------|-----------------------|-----------------------|---------------|----------------------|-----------------------|------------------|---------------|---------------|
| ON / OFF switch (DPST) | | | | | | | | | | | | |
| 1670.5201 | 230 | | | | | | 6.3 | ≥ 3 | Ag | | | |
| 1670.5202 | 230 | | | | | | 6.3 | ≥ 3 | Ag | | | |
| 1670.5204 | 230 | | | | | | 6.3 | ≥ 3 | Ag | | | |
| 1670.5203 | 115 - 230 | | | | | | 6.3 | ≥ 3 | Ag | | | |
| 1671.5201 | | | | | | | 6.3 | ≥ 3 | Ag | | | |
| 1671.5203 | | | | | | | 6.3 | ≥ 3 | Ag | | | |
| Normally open contact (DPNO) | | | | | | | | | | | | |
| 1671.5101 | | | | | | | 6.3 | ≥ 3 | Ag | | | |


ROCKER SWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SNAP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH-N-DRIVE




SERIES 1670 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES

TO 16 (4) A 250 V AC

| | | | | | | | | | | | |
|---|----------------------|---|---|-----------------------|-----------------------|---|----------------------|-----------------------|------------------|---------------|---------------|
|  Lamp | Lighting voltage (V) | Actuator color / printing | Housing color | 16 (4) A 250 V AC 1E4 | 12 (4) A 250 V AC 1E4 | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
| | 230 |  |  | | |  | 6.3 | | | | |
| 1677.5306 | 115 - 230 |  |  | | |  | 6.3 | | | | |





Basic types 1672, 1673 and 1675 single-pole illuminated / non-illuminated





X = Wall thickness


| x | y | z |
|-------------|---------------------|-----------------------|
| 0.8 ... 5.0 | 30 ^{+0.15} | 22.2 ^{+0.15} |
| 0.8 ... 5.0 | 30 ^{+0.15} | 22.2 ^{+0.15} |

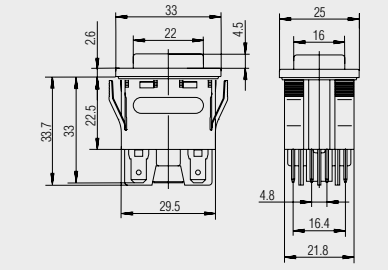


 Quick-connect terminal 4.8 x 0.8
1673.5501

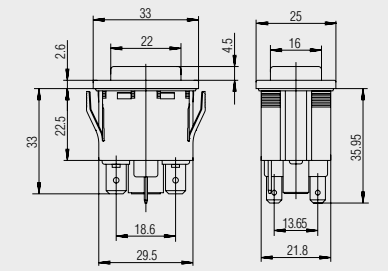

 Quick-connect terminal 6.3 x 0.8 /
2 x 4.8 x 0.8 external lamp terminal
basic type 1675

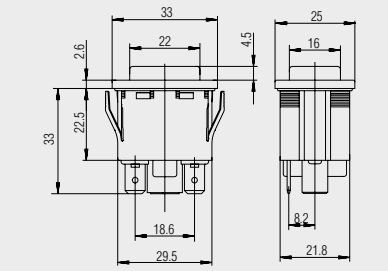

 Quick-connect terminal 6.3 x 0.8
basic type 1672




SERIES 1670 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES


TO 16 (4) A 250 V AC



Basic types 1670 and 1671
double-pole
illuminated / non-illuminated

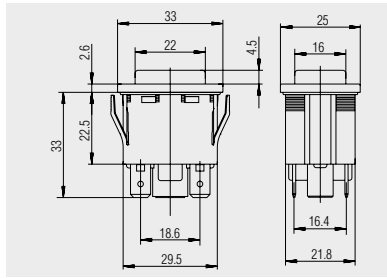

Quick-connect terminal 6.3 x 0.8




X = Wall thickness


| x | y | z |
|-------------|---------------------|-----------------------|
| 0.8 ... 5.0 | 30 ^{+0.15} | 22.2 ^{+0.15} |



Basic type 1677
lamp

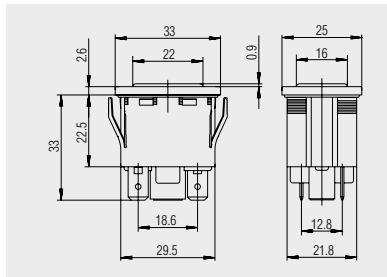

Quick-connect terminal 6.3 x 0.8




X = Wall thickness

| x | y | z |
|-------------|---------------------|-----------------------|
| 0.8 ... 5.0 | 30 ^{+0.15} | 22.2 ^{+0.15} |



Dummy piece
203.020.013

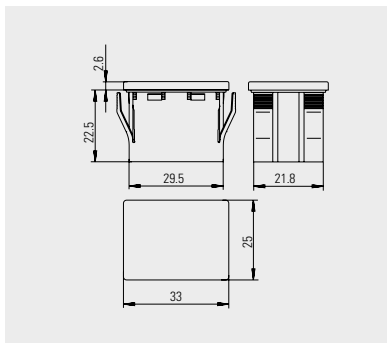

Dummy piece for size of basic type 1677 made of PA with housing in black and cover in blue

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH-IN DRIVE

ORDER DAY AND NIGHT

In our web shop you can order more than
200 standard switches independent of time
and place:
24 hours per day, 7 days per week.

➤ www.marquardt-shop.com





TOGGLE SWITCHES

| | |
|------------------------|--|
| ROCKER SWITCHES | |
| PUSHBUTTON SWITCHES | |
| TOGGLE SWITCHES | |
| SLIDE SWITCHES | |
| ROTARY SWITCHES | |
| FOOT SWITCHES | |
| TACT AND KEY SWITCHES | |
| SNAP-ACTION SWITCHES | |
| MICRO-SIGNAL SWITCHES | |
| SENSORS | |
| ECO | |
| PUSH'N'DRIVE | |

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH'N'DRIVE



SERIES 0350

Three-pole toggle switches
to 10 (4) A 400 V AC



▶ PAGE
131

SERIES 1810

Single and double-pole toggle
switches
to 10 (4) A 250 V AC

Appliance cut-out: 19,2 x 12,9 mm
19,2 x 21,9 mm



▶ PAGE
132 – 134

SERIES 1820

Single and double-pole toggle
switches
to 6 (4) A 250 V AC

Appliance cut-out: Ø 12 mm



▶ PAGE
135 – 138

SERIES 0100

Single-pole toggle switches
to 2 A 250 V AC

Appliance cut-out: Ø 12 mm



▶ PAGE
139 – 140



SERIES 0350 - THREE-POLE TOGGLE SWITCHES

TO 10 (4) A 400 V AC

PRODUCT FEATURES


- Robust and efficient rocker switch with 100 000 mechanical switching cycles
- With dust seal
- Approval for 400 V

ON REQUEST


- Other terminal types

| | |
|--|---|
| Mechanical life endurance | 1E5 |
| Material actuator housing terminals | Duroplast Duroplast / PA glass fiber-reinforced chromated |
| Approval marks | |
| Suitable for appliances of protection class II | |

| three-pole | Actuator color / printing | Housing color | 10 (4) A 400 V AC 5E4 | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
|------------------------|---------------------------|---------------|-----------------------|---------------|----------------------|-----------------------|------------------|---|---------------|
| ON / OFF switch (TPST) | | | | | | | | | |
| 0350.0101 | | | ○ | | M3.5 | ≥ 3 | Ag | lever with red dot | ○ |
| 0350.2101 | | | ○ | | M3.5 | ≥ 3 | Ag | 3 auxiliary terminals lever with red dot | |



Basic type 0350

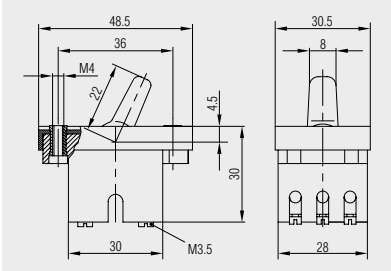

Socket terminal M3.5

ROCKERSWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 MICRO-SIGNAL SWITCHES
 SMP-ACTION SWITCHES
 SENSORS
 ECO
 PUSH-IN DRIVE



SERIES 1810 - SINGLE AND DOUBLE-POLE TOGGLE SWITCHES

TO 10 (4) A 250 V AC



PRODUCT FEATURES

- Attractive toggle switches
- 100 million times proven switching principle
- Long life endurance with 100 000 mechanical switching cycles
- Excellent actuating characteristic

ON REQUEST


- Other colors
- Other printing variants
- Other switching functions
- Other terminal variants
- Cable assembly


| | |
|--|--|
| Mechanical life endurance | 5E4 (changeover switch with OFF position in center) 10E4 |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 |
| Ambient temperature | terminal side -20 °C ... +100 °C actuating side -20 °C ... +55 °C |
| Flammability | UL 94 V-2 |
| Glow wire test temperature | 850 °C |
| Material actuator housing terminals | PA PA silver plated |
| Plug force of the terminals | ≤ 80 N |
| Approval marks | |
| Suitable for appliances of protection class II | |



SERIES 1810 - SINGLE AND DOUBLE-POLE TOGGLE SWITCHES

TO 10 (4) A 250 V AC

|  single-pole | Actuator color / printing | Housing color | 10 (4) A 250 V AC 1E4 | 6 (4) A 250 V AC 5E4 | 6 (2) A 250 V AC 1E4 | 4 (2) A 250 V AC 1E4 | 6 A 250 V AC 1/2 HP | 6 A 125 V AC 1/4 HP | 6 A 125 - 250 V AC 1/8 HP | 6 A 125 V AC 1/10 HP | 4 A 250 V AC 1/10 HP | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
|--|---------------------------|---------------|-----------------------|-----------------------|-----------------------|----------------------|-----------------------|-----------------------|---------------------------|-----------------------|-----------------------|---------------|----------------------|-----------------------|------------------|-----------------------------|-----------------------|
| ON / OFF switch (SPST) | | | | | | | | | | | | | | | | | |
| 1811.1102 | | | <input type="radio"/> | <input type="radio"/> | | | <input type="radio"/> | <input type="radio"/> | | | | | 4.8 | ≥ 3 | Ag | | <input type="radio"/> |
| Normally open contact (SPNO) | | | | | | | | | | | | | | | | | |
| 1811.1202 | | | | | <input type="radio"/> | | | | | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | | |
| Changeover switch (SPDT) | | | | | | | | | | | | | | | | | |
| 1813.1102 | | | <input type="radio"/> | <input type="radio"/> | | | <input type="radio"/> | <input type="radio"/> | | | | | 4.8 | ≥ 3 | Ag | | <input type="radio"/> |
| Changeover switch with OFF position in the center (SPDT - Center OFF) | | | | | | | | | | | | | | | | | |
| 1818.1102 | | | | <input type="radio"/> | | | | <input type="radio"/> | | | | | 4.8 | < 3 | Ag | | <input type="radio"/> |
| 1818.1202 | | | | <input type="radio"/> | | | | <input type="radio"/> | | | | | 4.8 | < 3 | Ag | momentary function one side | <input type="radio"/> |
| 1818.1302 | | | | <input type="radio"/> | | | | <input type="radio"/> | | | | | 4.8 | < 3 | Ag | momentary function one side | <input type="radio"/> |
| 1818.2302 | | | | <input type="radio"/> | | | | <input type="radio"/> | | | | | | < 3 | Ag | momentary function one side | |

|  double-pole | Actuator color / printing | Housing color | 10 (4) A 250 V AC 1E4 | 6 (4) A 250 V AC 5E4 | 6 (2) A 250 V AC 1E4 | 4 (2) A 250 V AC 1E4 | 6 A 250 V AC 1/2 HP | 6 A 125 V AC 1/4 HP | 6 A 125 - 250 V AC 1/8 HP | 6 A 125 V AC 1/10 HP | 4 A 250 V AC 1/10 HP | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
|--|---------------------------|---------------|-----------------------|-----------------------|----------------------|----------------------|-----------------------|-----------------------|---------------------------|----------------------|----------------------|---------------|----------------------|-----------------------|------------------|-------------------------------|-----------------------|
| ON / OFF switch (DPST) | | | | | | | | | | | | | | | | | |
| 1812.1102 | | | <input type="radio"/> | <input type="radio"/> | | | <input type="radio"/> | <input type="radio"/> | | | | | 4.8 | ≥ 3 | Ag | | |
| Changeover switch (DPDT) | | | | | | | | | | | | | | | | | |
| 1814.2102 | | | <input type="radio"/> | <input type="radio"/> | | | <input type="radio"/> | <input type="radio"/> | | | | | | ≥ 3 | Ag | | |
| Changeover switch with OFF position in the center (DPDT - Center OFF) | | | | | | | | | | | | | | | | | |
| 1819.1102 | | | | <input type="radio"/> | | | | <input type="radio"/> | | | | | 4.8 | < 3 | Ag | | |
| 1819.1302 | | | | <input type="radio"/> | | | | <input type="radio"/> | | | | | 4.8 | < 3 | Ag | momentary function both sides | <input type="radio"/> |

ROCKERSWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SMP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH N'DRIVE




SERIES 1810 - SINGLE AND DOUBLE-POLE TOGGLE SWITCHES

TO 10 (4) A 250 V AC




Basic types 1811, 1813 and 1818 single-pole




X = Wall thickness


| x | y | z |
|---------------|----------------------|----------------------|
| 0.75 ... 1.25 | 19.2 ^{-0.1} | 12.9 ^{+0.1} |
| 1.25 ... 2 | 19.4 ^{-0.1} | 12.9 ^{+0.1} |
| 2 ... 3 | 19.8 ^{-0.1} | 12.9 ^{+0.1} |

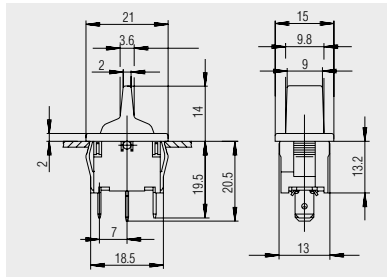

Quick-connect terminal 4.8 x 0.8 basic type 1818

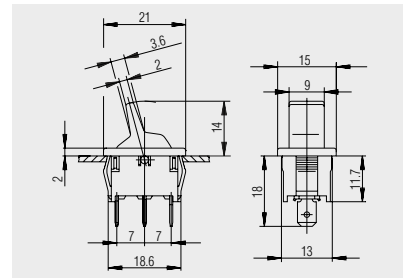


Quick-connect terminal 4.8 x 0.8 basic types 1813 and 1811 without third terminal

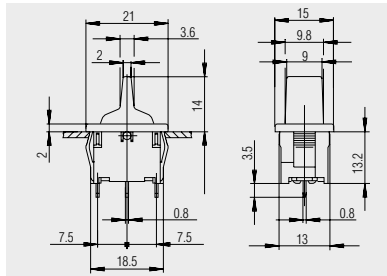

PCB terminal basic type 1818




Basic types 1812, 1814 and 1819 double-pole




X = Wall thickness


| x | y | z |
|---------------|----------------------|----------------------|
| 0.75 ... 1.25 | 19.2 ^{-0.1} | 21.9 ^{+0.1} |
| 1.25 ... 2 | 19.4 ^{-0.1} | 21.9 ^{+0.1} |
| 2 ... 3 | 19.8 ^{-0.1} | 21.9 ^{+0.1} |

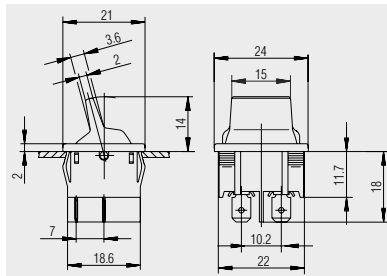

Quick-connect terminal 4.8 x 0.8 basic type 1812

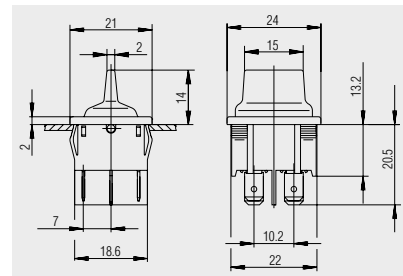

Quick-connect terminal 4.8 x 0.8 basic type 1819

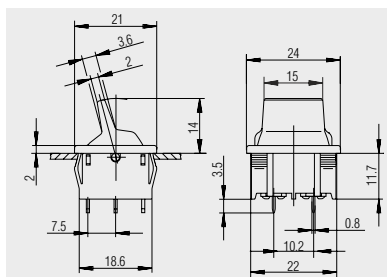

PCB terminal basic type 1814

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE



SERIES 1820 - SINGLE AND DOUBLE-POLE TOGGLE SWITCHES

TO 6 (4) A 250 V AC






PRODUCT FEATURES

- 100 million times proven switching principle
- Long life endurance with 50 000 mechanical switching cycles
- Excellent actuating characteristic
- Fastening with nut M12

ON REQUEST


- Other colors
- Other switching functions
- Other terminal variants
- Cable assembly


| | |
|---|---|
| Mechanical life endurance | 5E4 |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 |
| Ambient temperature | terminal side -20 °C ... +100 °C actuating side -20 °C ... +55 °C |
| Flammability | UL 94 V-2 |
| Glow wire test temperature | 850 °C |
| Material actuator housing terminals | PA PA glass fiber-reinforced / PA silver plated |
| Plug force of the terminals | ≤ 80 N |
| Approval marks |  /  /  |
| Suitable for appliances of protection class II | |



SERIES 1820 - SINGLE AND DOUBLE-POLE TOGGLE SWITCHES

TO 6 (4) A 250 V AC

|  single-pole | Actuator color / printing | Housing color | 6 (4) A 250 V AC 5E4 | 6 (2) A 250 V AC 1E4 | 6 A 250 V AC 1/2 HP | 6 A 125 V AC 1/4 HP | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
|--|-------------------------------|---------------|-----------------------|-----------------------|-----------------------|-----------------------|---------------|----------------------|-----------------------|------------------|-------------------------------|-----------------------|
| | ON / OFF switch (SPST) | | | | | | | | | | | |
| 1821.1101 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | | <input type="radio"/> |
| 1821.6101 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | | ≥ 3 | Ag | | <input type="radio"/> |
| Changeover switch (SPDT) | | | | | | | | | | | | |
| 1823.1101 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | | <input type="radio"/> |
| 1823.6101 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | | ≥ 3 | Ag | | <input type="radio"/> |
| Changeover switch with OFF position in the center (SPDT - Center OFF) | | | | | | | | | | | | |
| 1828.1101 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | < 3 | Ag | | <input type="radio"/> |
| 1828.1201 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | < 3 | Ag | momentary function one side | <input type="radio"/> |
| 1828.1301 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | < 3 | Ag | momentary function both sides | <input type="radio"/> |

|  double-pole | Actuator color / printing | Housing color | 6 (4) A 250 V AC 5E4 | 6 (2) A 250 V AC 1E4 | 6 A 250 V AC 1/2 HP | 6 A 125 V AC 1/4 HP | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
|--|-------------------------------|---------------|-----------------------|-----------------------|-----------------------|-----------------------|---------------|----------------------|-----------------------|------------------|-------------------------------|-----------------------|
| | ON / OFF switch (DPST) | | | | | | | | | | | |
| 1822.1101 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | | <input type="radio"/> |
| Changeover switch (DPDT) | | | | | | | | | | | | |
| 1824.1101 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | ≥ 3 | Ag | | <input type="radio"/> |
| Changeover switch with OFF position in the center (DPDT - Center OFF) | | | | | | | | | | | | |
| 1829.1101 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | < 3 | Ag | | <input type="radio"/> |
| 1829.1301 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | 4.8 | < 3 | Ag | momentary function both sides | <input type="radio"/> |

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE




SERIES 1820 - SINGLE AND DOUBLE-POLE TOGGLE SWITCHES


TO 6 (4) A 250 V AC




Basic types 1821, 1823 and 1828
single-pole

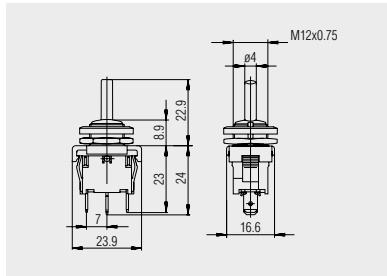

Quick-connect terminal 4.8 x 0.8
basic type 1828

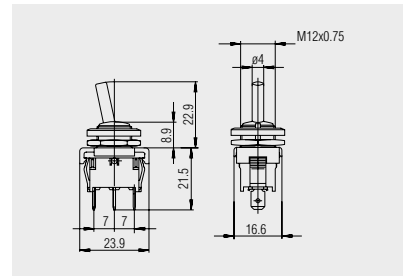


Quick-connect terminal 4.8 x 0.8
basic types 1821 and 1823

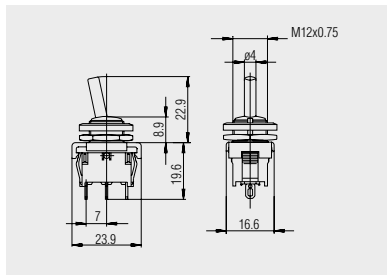


Solder terminal
1821.6101 and 1823.6101



Basic types 1822, 1824 and 1829
double-pole

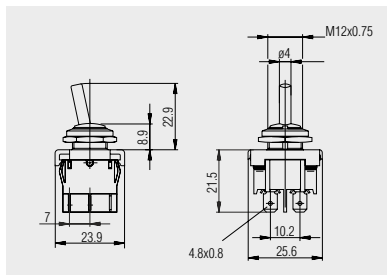


Quick-connect terminal 4.8 x 0.8
basic type 1822 and 1824

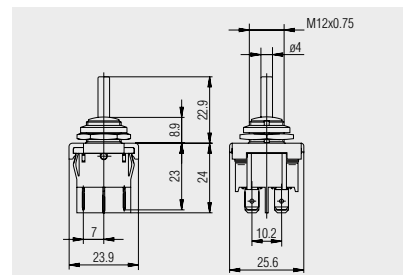

Quick-connect terminal 4.8 x 0.8
basic type 1829



Identification plate
240.001.011

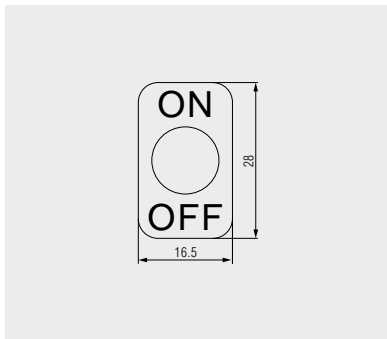

Aluminum identification plate to
plugging on and with black inscription
"ON" and "OFF"

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNMP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH 'N' DRIVE




SERIES 1820 - SINGLE AND DOUBLE-POLE TOGGLE SWITCHES

TO 6 (4) A 250 V AC




Identification plate
240.002.011



Identification plate made of CuZn nickel-plated for plugging on as well as with twist protection and stamped inscription "ON" and "OFF"




Protection cap
343.001.013 - green
343.001.023 - black
343.001.033 - red



Neopren®-cap for screwing on (M12 x 0.75) to levers of the series 1820 for dust and water protection of the actuator side



Lever receptacle
203.105.011 - black
203.105.021 - white
203.105.031 - red
203.105.041 - green



Lever receptacle in various colors for the plastic levers of the 1820 series for customer assembly. Serves as a design element and for distinguishing and marking.



SERIES 0100 - SINGLE-POLE TOGGLE SWITCHES

TO 2 A 250 V AC



PRODUCT FEATURES

- Robust and powerful toggle switch with 50 000 mechanical switching cycles
- Central fastening with nut M12
- Metal or plastic lever

ON REQUEST

- Other terminal variants

| | |
|---|---|
| Mechanical life endurance | 5E4 |
| Material actuator housing terminals | metal / PA (product-dependent) CnZn nickel-plated / Duroplast (base) / chromated galvanized steel (bracket plate) silver plated |


| single-pole | Actuator color / printing | Housing color | 2 A 250 V 1E3 | Terminal type | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
|-------------------------------|---------------------------|---------------|---------------|---------------|-----------------------|--------------------|--|---------------|
| ON / OFF switch (SPST) | | | | | | | | |
| 0100.1201 | | | ○ | | ≥ 3 | CuZn silver plated | actuating torque 45.0 ±14.0 Nmm | ○ |
| 0100.2901 | | | ○ | | ≥ 3 | CuZn silver plated | actuating torque 45.0 ±14.0 Nmm metal lever | ○ |


TOGGLE SWITCHES
 PUSHBUTTON SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 MICRO-SIGNAL SWITCHES
 SMP-ACTION SWITCHES
 SENSORS
 ECO
 PUSH N DRIVE
 SLIDE SWITCHES
 ROCKER SWITCHES




SERIES 0100 - SINGLE-POLE TOGGLE SWITCHES

TO 2 A 250 V AC

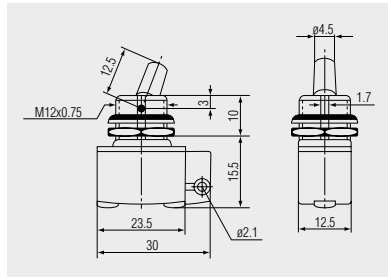


 Solder terminal

Basic type 0100

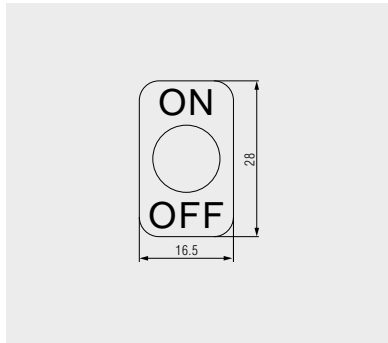

Aluminum identification plate to plugging on and with black inscription "ON" and "OFF"

Identification plate
240.001.011

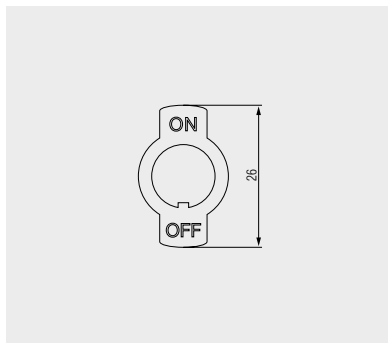

Identification plate made of CuZn nickel-plated for plugging on and with twist protection and stamped inscription "ON" and "OFF"

Identification plate
240.002.011

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE



SLIDE SWITCHES

| | |
|-----------------------|--|
| ROCKER SWITCHES | |
| PUSHBUTTON SWITCHES | |
| TOGGLE SWITCHES | |
| SLIDE SWITCHES | |
| ROTARY SWITCHES | |
| FOOT SWITCHES | |
| TACT AND KEY SWITCHES | |
| SNAP-ACTION SWITCHES | |
| MICRO-SIGNAL SWITCHES | |
| SENSORS | |
| ECO | |
| PUSH'N'DRIVE | |

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH'N'DRIVE



SERIES 4021

Double and four-pole slide switches
to 10 A 125 V or 5 A 250 V AC
(as voltage selector switch)



▶ PAGE
143 – 145

SERIES 1206

Single-pole slide switches
to 8 (8) A 250 V AC



▶ PAGE
146 – 147



SERIES 4021 - DOUBLE AND FOUR-POLE SLIDE SWITCHES

TO 10 A 125 V OR 5 A 250 V AC (AS VOLTAGE SELECTOR SWITCH)






PRODUCT FEATURES

- Different designs
- Various terminal types
- Suitable as voltage selector switch (for currentless switching)
- Sunken slide for protection against accidental actuation
- Simple assembly with screws

ON REQUEST

























- Other colors
- Other labels
- Single to four-pole variants
- Other terminal variants (e.g. PCB side)

| | |
|---|---|
| Mechanical life endurance | 1E4 |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 |
| Ambient temperature | terminal side -20 °C ... +85 °C actuating side -20 °C ... +55 °C |
| Flammability | UL 94 V-2 |
| Glow wire test temperature | 850 °C |
| Material actuator housing terminals | PA PA / hard paper (baseplate) / PA glass fiber-reinforced (baseplate) silver plated / chromated |
| Plug force of the terminals | ≤ 60 N |
| Approval marks |  /  /  |



SERIES 4021 - DOUBLE AND FOUR-POLE SLIDE SWITCHES

TO 10 A 125 V OR 5 A 250 V AC (AS VOLTAGE SELECTOR SWITCH)

|  double-pole | | Actuator color / printing | Housing color | 10 A 125 V AC 1E4 | 5 A 250 V AC 1E4 | 2 (0.5) A 250 V AC 1E4 | 2 A 42 V AC 1E4 | 10 A 125 V AC | 5 A 250 V AC | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
|--|---|---------------------------|---------------|-------------------|------------------|------------------------|-----------------|---------------|--------------|---|----------------------|-----------------------|--------------------|---|---------------|
| Changeover switch (DPDT) | | | | | | | | | | | | | | | |
| 4021.0203 |  | | | ○ | ○ | | | ○ | ○ |  | | ≥ 3 | CuSn silver plated | 5 A or 10 A only as voltage selector switch | |
| 4021.0512 |  | | | ○ | ○ | | | ○ | ○ |  | 2.8 | ≥ 3 | CuSn silver plated | 5 A or 10 A only as voltage selector switch slide with actuating slot | ○ |
| 4021.4420 |  | | | ○ | ○ | | | ○ | ○ |  | | ≥ 3 | CuSn silver plated | 5 A or 10 A only as voltage selector switch | ○ |
| 4021.4620 |  | | | ○ | ○ | | | ○ | ○ |  | | ≥ 3 | CuSn silver plated | 5 A or 10 A only as voltage selector switch slide with actuating slot | ○ |
| 4021.4723 |  | | | ○ | ○ | | | ○ | ○ |  | | ≥ 3 | CuSn silver plated | 5 A or 10 A only as voltage selector switch slide with actuating slot | ○ |
| 4021.4920 |  | | | ○ | ○ | | | ○ | ○ |  | side | ≥ 3 | CuSn silver plated | 5 A or 10 A only as voltage selector switch | ○ |
| 4021.0101 |  | | | | | ○ | | | |  | | ≥ 3 | CuSn silver plated | | ○ |
| 4021.0801 |  | | | | | ○ | | | |  | 2.8 | ≥ 3 | CuSn silver plated | | ○ |
| Changeover switch with OFF position in the center (DPDT - Center OFF) | | | | | | | | | | | | | | | |
| 4021.1203 |  | | | | | ○ | | | |  | 5 long | ≥ 3 | CuSn silver plated | | |
|  four-pole | | Actuator color / printing | Housing color | 10 A 125 V AC 1E4 | 5 A 250 V AC 1E4 | 2 (0.5) A 250 V AC 1E4 | 2 A 42 V AC 1E4 | 10 A 125 V AC | 5 A 250 V AC | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
| Changeover switch (FPDT) | | | | | | | | | | | | | | | |
| 4024.0501 |  | | | | | ○ | | | |  | 2.8 | ≥ 3 | CuSn silver plated | slide with actuating slot | |
| 4024.4601 |  | | | | | ○ | | | |  | | ≥ 3 | CuSn silver plated | slide with actuating slot | |

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE




SERIES 4021 - DOUBLE AND FOUR-POLE SLIDE SWITCHES


TO 10 A 125 V OR 5 A 250 V AC (AS VOLTAGE SELECTOR SWITCH)




Basic type 4021
double-pole

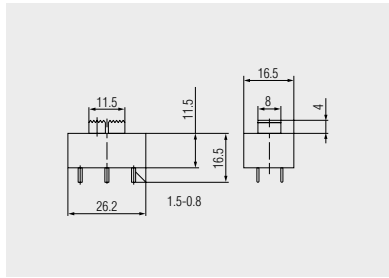


Wire-Wrap 5 long
4021.1203

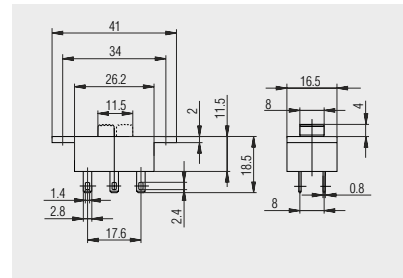

Quick-connect terminal 2.8 x 0.8
4021.0512 and 4021.0801

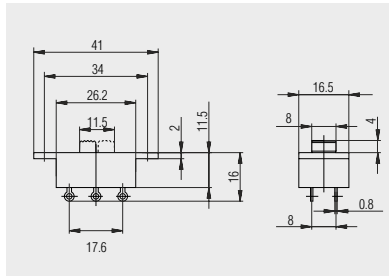


Solder terminal
4021.0203 and 4021.0101

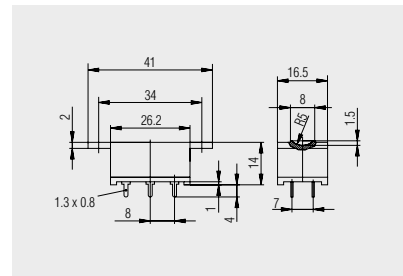


PCB terminal
Slide with actuating slot
4021.4420 and 4021.4620



Basic type 4024
four-pole

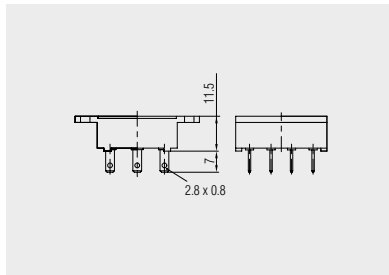

Quick-connect terminal 2.8 x 0.8
4024.0501

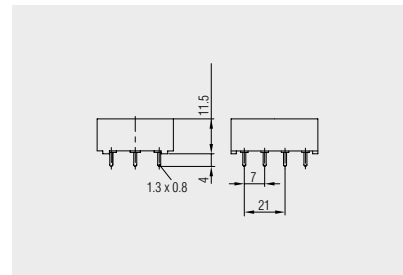

PCB terminal
4024.4601


ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH N' DRIVE




SERIES 4021 - DOUBLE AND FOUR-POLE SLIDE SWITCHES

TO 10 A 125 V OR 5 A 250 V AC (AS VOLTAGE SELECTOR SWITCH)


Inscription

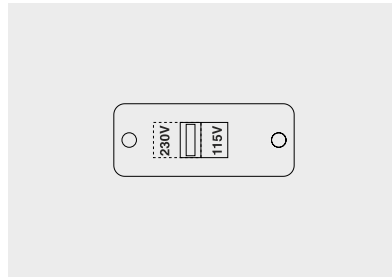

4021.0203

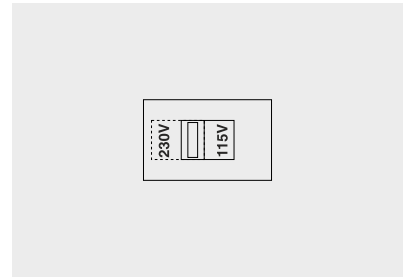

4021.4620

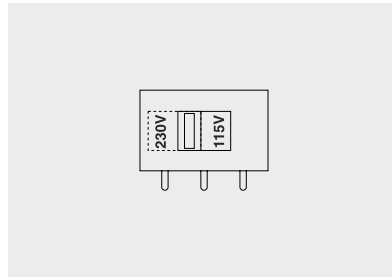

4021.4723

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SWAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO


PUSH'N'DRIVE




SERIES 1206 - SINGLE-POLE SLIDE SWITCHES


TO 8 (8) A 250 V AC


| single-pole | Actuator color / printing | Housing color | 8 (8) A 250 V AC 5E4 | 25 A 12 - 36 V DC | 15 A 125 V AC | 8 A 250 V AC | Terminal type | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
|-------------------------------|---------------------------|---------------|-----------------------|-----------------------|-----------------------|-----------------------|---------------|-----------------------|------------------|---------------------------------|---------------|
| ON / OFF switch (SPST) | | | | | | | | | | | |
| 1206.0201 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | ≥ 3 | Ag | with slide for direct actuation | |
| 1206.2503 | | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | | ≥ 3 | Ag | with slide for direct actuation | |




Basic type 1206

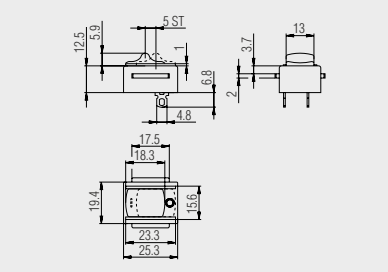

 Solder terminal
1206.0201

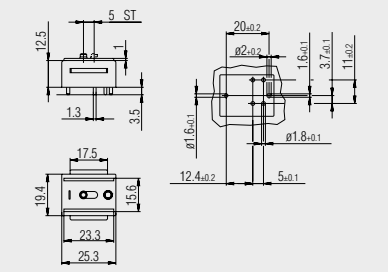

 PCB terminal
1206.2503

Further information under

WWW.MARQUARDT-SWITCHES.COM



ROTARY SWITCHES

| | |
|------------------------|--|
| ROCKER SWITCHES | |
| PUSHBUTTON SWITCHES | |
| TOGGLE SWITCHES | |
| SLIDE SWITCHES | |
| ROTARY SWITCHES | |
| FOOT SWITCHES | |
| TACT AND KEY SWITCHES | |
| SNAP-ACTION SWITCHES | |
| MICRO-SIGNAL SWITCHES | |
| SENSORS | |
| ECO | |
| PUSH'N'DRIVE | |

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH'N'DRIVE



SERIES 1703

Powerful rotary switches
to 20 (4) A 400 V AC



▶ PAGE
151 – 152

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SWAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS


ECO

PUSH'N'DRIVE



SERIES 1703 - POWERFUL ROTARY SWITCHES

TO 20 (4) A 400 V AC

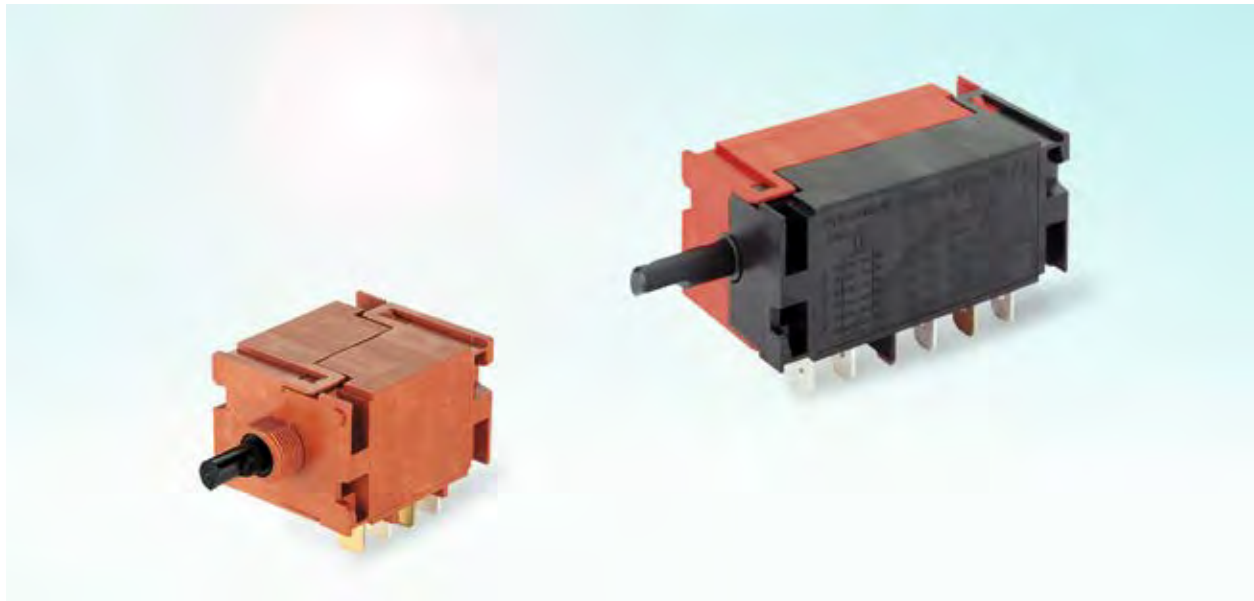

PRODUCT FEATURES

- Creep and air distances greater than 8 mm, therefore suitable for mains and touchable low voltage
- 60° switching angle (1 - 6 switching steps)
- Fastening with thread M3 or bayonet connection
- With mechanical forced opening
- Approval for 400 V

ON REQUEST

- Single to six-pole variant
- Other switching functions and sequences
- Other terminal variants
- Cable assembly
- Customized actuators
- Gold contacts

| | |
|---|--|
| Mechanical life endurance | 3E4 |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 400 PTI |
| Protection type | IP 40 |
| Ambient temperature | terminal side -20 °C ... +100 °C ... +55 °C |
| Flammability | UL 94 (housing: V-0, spindle: V-2) |
| Glow wire test temperature | 850 °C |
| Material | actuator housing terminals |
| | PA PA glass fiber-reinforced silver plated respectively bare |
| Plug force of the terminals | ≤ 80 N |
| Approval marks | |
| Suitable for appliances of protection class II | |

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH N' DRIVE




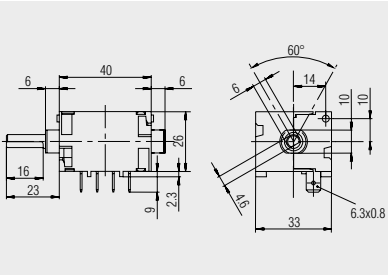
SERIES 1703 - POWERFUL ROTARY SWITCHES

TO 20 (4) A 400 V AC

| double-pole | Actuator color / printing | Housing color | 20 (4) A 400 V AC 1E4 | 16 (16) A 250 V AC 5E4 | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
|-------------------------------|---------------------------|---------------|-----------------------|------------------------|---------------|----------------------|-----------------------|------------------|------------------------|---------------|
| ON / OFF switch (DPST) | | | | | | | | | | |
| 1703.3201 | ● | ■ | ○ | ○ | | 6.3 | ≥ 3 | Ag | 1 switching step (60°) | |
| 1703.4001 | ● | ■ | | ○ | | 6.3 | ≥ 3 | Ag | 1 switching step (60°) | |

| three-pole | Actuator color / printing | Housing color | 20 (4) A 400 V AC 1E4 | 16 (16) A 250 V AC 5E4 | Terminal type | Terminal description | Contact distance (mm) | Contact material | Miscellaneous | Stock version |
|--------------------|---------------------------|---------------|-----------------------|------------------------|---------------|----------------------|-----------------------|------------------|-----------------------|---------------|
| Step switch | | | | | | | | | | |
| 1703.4101 | ● | ■ | | ○ | | 6.3 | ≥ 3 | Ag | 3 switching positions | |





Quick-connect terminal 6.3 x 0.8

Basic type 1703

ROCKERSWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SNAP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH'N'DRIVE



FOOT SWITCHES

| | |
|-----------------------|--|
| ROCKER SWITCHES | |
| PUSHBUTTON SWITCHES | |
| TOGGLE SWITCHES | |
| SLIDE SWITCHES | |
| ROTARY SWITCHES | |
| FOOT SWITCHES | |
| TACT AND KEY SWITCHES | |
| SNAP-ACTION SWITCHES | |
| MICRO-SIGNAL SWITCHES | |
| SENSORS | |
| ECO | |
| PUSH'N'DRIVE | |

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH'N'DRIVE



SERIES 2410

Ergonomic foot switches
to 6 (2.5) A 250 V AC



▶ PAGE
155 – 157

SERIES 2420

IP 65 / 67 protected foot switch
to 16 (4) A 250 V AC 25E3



▶ PAGE
158 – 160

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE



SERIES 2410 - ERGONOMIC FOOT SWITCHES

TO 6 (2.5) A 250 V AC



PRODUCT FEATURES

- Long life endurance up to 300 000 mechanical switching cycles
- Robust design
- Cable can be retrofitted by customer
- Ergonomical dimensions with different operating forces
- With wall hanger

ON REQUEST

- Other colors
- Customized cable assembly
- Special switching functions
- Other terminal variants

| | |
|------------------------------|----------|
| Mechanical life endurance | 30E4 |
| Proof tracking | 250 PTI |
| Material actuator housing | PA PA |
| Approval marks | |

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS










ECO






PUSH 'N' DRIVE











SERIES 2410 - ERGONOMIC FOOT SWITCHES

TO 6 (2.5) A 250 V AC

| | | | | | | | | | |
|---|---|---|---|----------------------|-----------------------|------------------|---------------------|-----------------------|---|
|  single-pole | Actuator color / printing | Housing color | Terminal type | Terminal description | Contact distance (mm) | Contact material | Operating force (N) | Miscellaneous | Stock version |
| | | 6 (2.5) A 250 V AC 5E4 | | | | | | | |
| Normally open contact (SPNO) | | | | | | | | | |
| 2410.0301 |  |  |  | 2 terminals M3 | < 3 | Ag | 31 ± 5 | with switch 1005.1801 |  |
| Changeover switch (SPDT momentary) | | | | | | | | | |
| 2410.0401 |  |  |  | M3 3 terminals | < 3 | Ag | 31 ± 5 | with switch 1005.1407 |  |

| | | | | | | | | | |
|--|---|---|---|----------------------|-----------------------|------------------|---------------------|--|---|
|  double-pole | Actuator color / printing | Housing color | Terminal type | Terminal description | Contact distance (mm) | Contact material | Operating force (N) | Miscellaneous | Stock version |
| | | 6 (2.5) A 250 V AC 5E4 | | | | | | | |
| Normally open contact (DPNO) | | | | | | | | | |
| 2410.1001 |  |  |  | assembled | ≥ 3 | Ag | 45 ± 7 N | 1 x PE connector (3 000 mm) / 1 x PE coupling (250 mm) 2 x 1005.1802 |  |

| | | | | | | | | | |
|---|---|---|---|----------------------|-----------------------|------------------|---|---|---|
|  Combination | Actuator color / printing | Housing color | Terminal type | Terminal description | Contact distance (mm) | Contact material | Operating force (N) | Miscellaneous | Stock version |
| | | 6 (2.5) A 250 V AC 5E4 | | | | | | | |
| Normally closed contact (SPNC) / Changeover switch (SPDT momentary) | | | | | | | | | |
| 2410.0101 |  |  |  | M3 3 terminals | < 3 | Ag | step 1: 25 ± 5 N / step 2: 85 ± 15 N | with switch 1005.1407 with switch 1005.1501 switching in sequence | |
| Normally open contact (SPNO) / Changeover switch (SPDT momentary) | | | | | | | | | |
| 2410.0501 |  |  |  | M3 5 terminals | < 3 | Ag | step 1: 22 N ± 4 / step 2: 31 ± 5 N | with switch 1005.1407 with switch 1005.1801 switching in sequence Changeover switch and normally open contact can be connected separately |  |

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS


ECO

PUSH'N'DRIVE




SERIES 2410 - ERGONOMIC FOOT SWITCHES

TO 6 (2.5) A 250 V AC

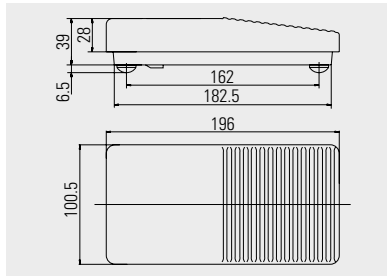


Socket terminal
2 terminals M3

Basic type 2410

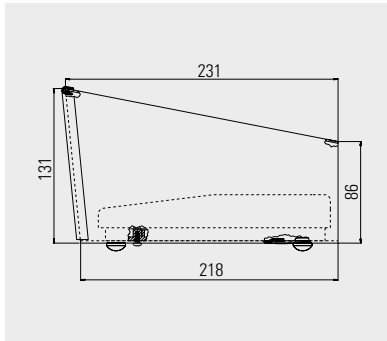


Steel plate protection hood in orange color similar to RAL 2004 with edge guard and rubber feet as well as fixation for foot switch of the basic type 2410

Protection hood
248.008.013

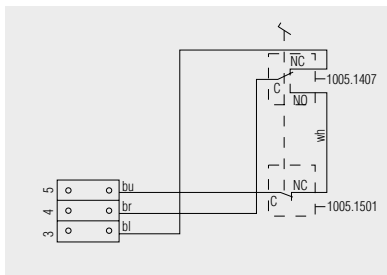

2410.0101

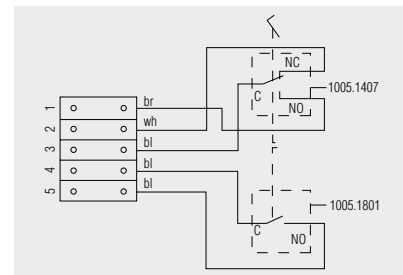

2410.0501

Circuit diagram

- bu - blue
- br - brown
- bl - black
- wh - white
- C - common terminal
- NC - normally closed contact
- NO - normally open contact

ROCKER SWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SMP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH-IN DRIVE



SERIES 2420 - IP 65 / 67 PROTECTED FOOT SWITCH

TO 16 (4) A 250 V AC 25E3



PRODUCT FEATURES

- Protected against dust and water (IP 65 / IP 67)
- Snap-action switching system proved millions of times
- Compact design with clearly discernable tactile feedback, robust and anti-slip, screw holes for fixing to the floor (optional)
- Versions for low DC signal currents, up to ratings of 16 A 250 V AC
- Wide range of switching functions, with and without cables
- Modern switch design, rocker available in different colors, can be printed to customer specifications
- Cable assembly on customer side

ON REQUEST






















- Special switching functions
- Other colors
- Customer logo
- Customized cable assembly

| | |
|---|---|
| Mechanical life endurance | 2E6 |
| Proof tracking | 250 PTI |
| Protection type | IP 65 and IP 67 |
| Ambient temperature | terminal side -20 °C ... +85 °C actuating side -20 °C ... +85 °C |
| Material | actuator housing terminals |
| | PA glass fiber-reinforced PA glass fiber-reinforced nickel-plated |
| Approval marks | |
| Suitable for appliances of protection class II | |



SERIES 2420 - IP 65 / 67 PROTECTED FOOT SWITCH

TO 16 (4) A 250 V AC 25E3


| | | | | | | | | | | |
|--|--|---|---|---|---------------------------------|------------------|---------------------|--|---|---|
|  single-pole | Actuator color / printing | Housing color | Terminal type | Terminal description | Contact distance (mm) | Contact material | Operating force (N) | Miscellaneous | Stock version | |
| | | 14 (4) A 250 V AC 5E4 | | | | | | | | |
| | ON / OFF switch (SPST) | | | | | | | | | |
| | 2420.0301 |  |  |  | M3 | < 3 | Ag | 35 ±10 | with strain relief | ○ |
| | Normally open contact (SPNO) | | | | | | | | | |
| 2420.0101 |  |  |  | M3 | < 3 | Ag | 35 ±10 | with strain relief | ○ | |
| 2420.0102 |  |  |  | M3 | < 3 | Ag | 35 ±10 | with strain relief | ○ | |
| 2420.4101 |  |  |  | assembled with wire end ferrule | < 3 | Ag | 35 ±10 | with strain relief two-wire connecting cable | ○ | |
|  double-pole | Actuator color / printing | Housing color | Terminal type | Terminal description | Contact distance (mm) | Contact material | Operating force (N) | Miscellaneous | Stock version | |
| | | 14 (4) A 250 V AC 5E4 | | | | | | | | |
| | Normally open contact (DPNO) | | | | | | | | | |
| | 2420.5201 |  |  |  | assembled with wire end ferrule | < 3 | Ag | 35 ±10 | 1 x PE connector (3 000 mm) / 1 x PE coupling (250 mm) with strain relief | |
| | | | | | | | | | | |
|  Combination | Actuator color / printing | Housing color | Terminal type | Terminal description | Contact distance (mm) | Contact material | Operating force (N) | Miscellaneous | Stock version | |
| | | 14 (4) A 250 V AC 5E4 | | | | | | | | |
| | Normally open contact (SPNO) | | | | | | | | | |
| | 2420.0501 |  |  |  | M3 | < 3 | Ag | step 1: 29 ± 10N / step 2: 51 ± 35N | with strain relief | ○ |
| | | | | | | | | | | |

ROTARY SWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SMP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH IN DRIVE




SERIES 2420 - IP 65 / 67 PROTECTED FOOT SWITCH

TO 16 (4) A 250 V AC 25E3

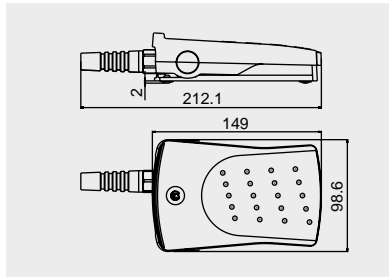


Socket terminal M3

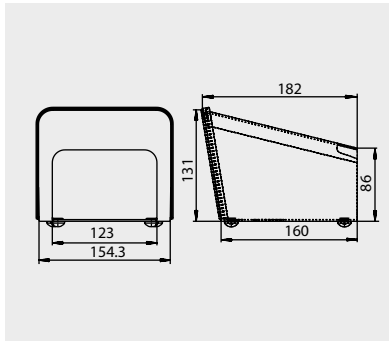


Protection hood
248.011.013

Steel plate protection hood in orange color similar to RAL 2004 with edge guard and rubber feet as well as fixation for foot switch of the basic type 2420

Circuit diagram

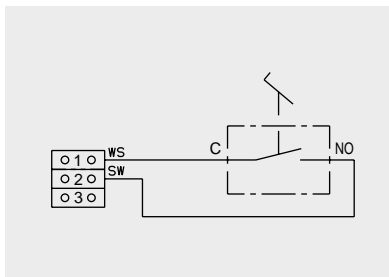


2420.0101

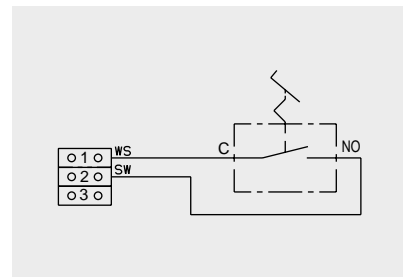


2420.0301

br - brown
hbl - bright blue
ws - white
sw - black
gnge - green/yellow

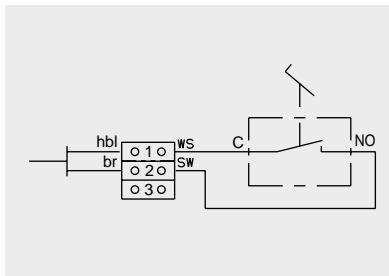

2420.4101

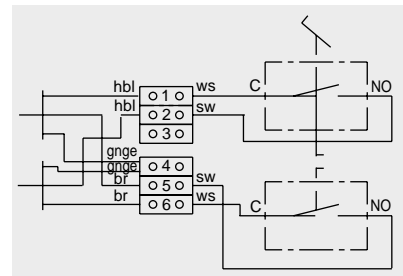

2420.5201



TACT AND KEY SWITCHES

| | |
|------------------------------|--|
| ROCKER SWITCHES | |
| PUSHBUTTON SWITCHES | |
| TOGGLE SWITCHES | |
| SLIDE SWITCHES | |
| ROTARY SWITCHES | |
| FOOT SWITCHES | |
| TACT AND KEY SWITCHES | |
| SNAP-ACTION SWITCHES | |
| MICRO-SIGNAL SWITCHES | |
| SENSORS | |
| ECO | |
| PUSH'N'DRIVE | |

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH'N'DRIVE



SERIES 3006

Tact switches
to 50 mA 28 V



▶ PAGE
163 – 164

SERIES 6425

Key switches
to 100 mA 28 V



▶ PAGE
165 – 170

SERIES 6450

Key switches
to 100 mA 28 V



▶ PAGE
171 – 172

SERIES 3000

Key switches
to 30 mA 28 V



▶ PAGE
173



SERIES 3006 - TACT SWITCHES

TO 50 mA 28 V



PRODUCT FEATURES

- Low height even with integrated LED
- SMD connection technique
- Pleasant actuating characteristic thanks to clearly tangible pressure point
- Extremely large actuator surface
- Six standard colors
- Two operating force variants
- Reflow lead-free solderable

ON REQUEST

- Other LED colors
- Different brightness groups

| | |
|---|---|
| Mechanical life endurance | 50E4 4N version, 20E4 6N version |
| Contact resistance (new condition) | < 100 mOhm |
| Ambient temperature | -40 °C ... +95 °C (1 h to +120 °C) |
| Material terminals | gold plated |
| Bounce time | < 5 ms |
| Packing unit | 1 800 pieces in blister belt on a roller |
| Miscellaneous | rating max. 1W voltage range 20 mV - 28 V current range 10 µA - 50 mA electrical life endurance: 4 N: 14V DC 10 mA 50E4 6 N: 14V DC 10 mA 20E4 |

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS












ECO

PUSH N' DRIVE




SERIES 3006 - TACT SWITCHES

TO 50 mA 28 V


|  single-pole | max 1 Watt | Contact material | Operating force (N) | Operating position (OP) (mm) | Free position (FP) max. (mm) | Permissible total travel position (TP) (mm) | Color lamp | Miscellaneous | Stock version |
|--|------------|------------------|---------------------|------------------------------|------------------------------|---|---|---|---------------|
| Normally open contact (SPNO) | | | | | | | | | |
| 3006.2100 | ○ | Au | 4 +1 -0.5 | 3.2 ±0.2 | 4.15 | 2.9 |  | without LED | |
| 3006.2101 | ○ | Au | 4 +1 -0.5 | 3.2 ±0.2 | 4.15 | 2.9 |  | | |
| 3006.2102 | ○ | Au | 4 +1 -0.5 | 3.2 ±0.2 | 4.15 | 2.9 |  | | |
| 3006.2104 | ○ | Au | 4 +1 -0.5 | 3.2 ±0.2 | 4.15 | 2.9 |  | | |
| 3006.2105 | ○ | Au | 4 +1 -0.5 | 3.2 ±0.2 | 4.15 | 2.9 |  | | |
| 3006.2106 | ○ | Au | 4 +1 -0.5 | 3.2 ±0.2 | 4.15 | 2.9 |  | LED white | |
| 3006.2107 | ○ | Au | 4 +1 -0.5 | 3.2 ±0.2 | 4.15 | 2.9 |  | | |
| 3006.2151 | ○ | Au | 4 +1 -0.5 | 3.2 ±0.2 | 4.15 | 2.9 |  | low current consumption reduced brightness | |
| 3006.2300 | ○ | Au | 6 +1.5 -0.75 | 3.2 ±0.2 | 4.15 | 2.9 |  | without LED | |
| 3006.2301 | ○ | Au | 6 +1.5 -0.75 | 3.2 ±0.2 | 4.15 | 2.9 |  | | |
| 3006.2306 | ○ | Au | 6 +1.5 -0.75 | 3.2 ±0.2 | 4.15 | 2.9 | | LED white | |




Basic type 3006

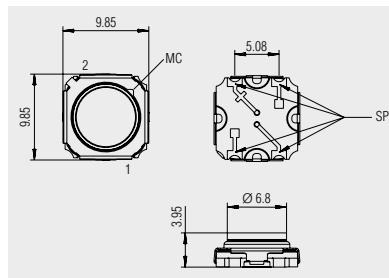

SMD connection technique

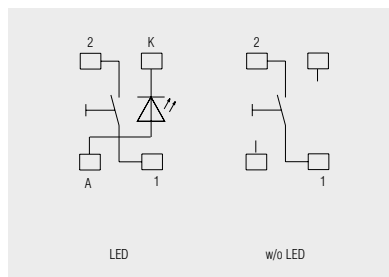

Circuit diagram with / without LED

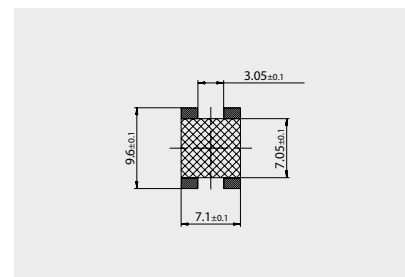

Solder pad design

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SWAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'DRIVE



SERIES 6425 - KEY SWITCHES

TO 100 mA 28 V



PRODUCT FEATURES

- Single-pole normally open contact with and without LEDs
- Pleasant actuating characteristic and low actuation noise
- Low bounce time
- Standard with gold plated contacts
- Wide range of key caps for different design requirements

ON REQUEST

- Customized key caps
- Other key cap colors
- Other LED colors
- Bicolor LED


| | |
|---|--|
| Contact resistance (new condition) | < 250 mOhm |
| Insulation resistance (new condition) | > 100 MOhm |
| Bounce time | < 5 ms |
| Contact distance | < 3 mm |
| Ambient temperature | -20 °C ... +70 °C |
| Contact material | Au |
| Material actuator housing terminals | POM PBTP tinned |
| Terminal type | PCB terminal |
| Mechanical life endurance | 1E6 at 10 mA 12 V |
| Flammability | UL 94 HB |
| Miscellaneous | The key base of the standard key can be snapped into a 1.2 mm thick frame with a cut-out of 13.55 x 13.55 mm. A current limiting to max. 20 mA must be provided for the integrated LED! |



SERIES 6425 - KEY SWITCHES

TO 100 mA 28 V


| | 100 mA 28 V | Color lamp | Pitch (mm) | Operating force (N) | Total travel / stroke (mm) | Miscellaneous | Stock version |
|-------------------------------------|-------------|------------|------------|---------------------|----------------------------|--|---------------|
| Normally open contact (SPNO) | | | | | | | |
| 6425.0101 | ○ | | > 16 | 0.7 | 1.4 ± 0.2 | customer LED assembly possible | ○ |
| 6425.1101 | ○ | | > 16 | 0.7 | 1.4 ± 0.2 | narrow base for parallel guide | ○ |
| 6425.3111 | ○ | | 19 | 0.7 | 1.4 ± 0.2 | | ○ |
| 6425.3121 | ○ | | 19 | 0.7 | 1.4 ± 0.2 | | |
| 6425.3131 | ○ | | 19 | 0.7 | 1.4 ± 0.2 | | ○ |
| 6425.4111 | ○ | | 16 | 0.7 | 1.4 ± 0.2 | | ○ |
| 6425.4121 | ○ | | 16 | 0.7 | 1.4 ± 0.2 | | ○ |
| 6425.4131 | ○ | | 16 | 0.7 | 1.4 ± 0.2 | | ○ |
| 6425.5111 | ○ | | 16 + 19 | 0.7 | 1.4 ± 0.2 | LED lower for button 834 900 ... and 835 900 ... | ○ |
| 6425.5131 | ○ | | 16 + 19 | 0.7 | 1.4 ± 0.2 | LED lower for button 834 900 ... and 835 900 ... | ○ |
| 6425.6111 | ○ | | > 15 | 0.7 | 1.4 ± 0.2 | LED higher for key cap 827 ... 011 | |
| 6425.6131 | ○ | | > 15 | 0.7 | 1.4 ± 0.2 | LED higher for key cap 827 ... 011 | |




Basic type 6425




Without LED or customer LED assembly

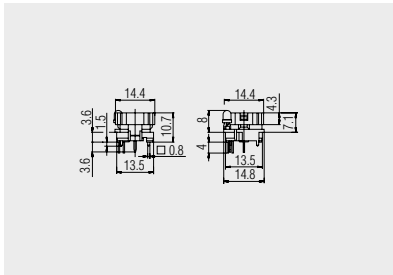

With LED

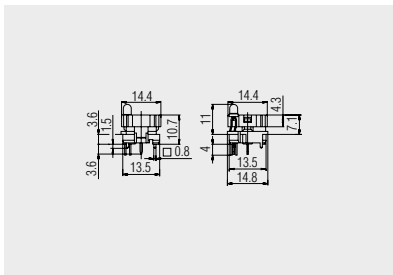

With LED for design key caps

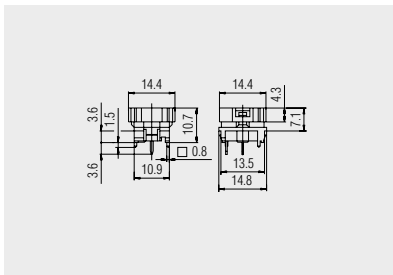

For multiple key caps with parallel guide




SERIES 6425 - KEY SWITCHES

TO 100 mA 28 V



Square key caps
pitch 16 mm

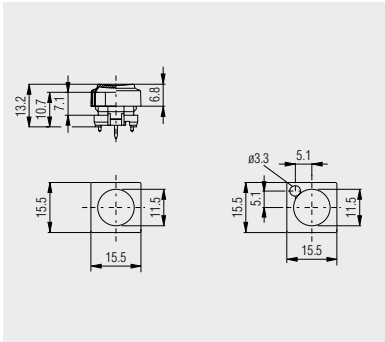


without LED window:
826.000.011 - anthracite
826.000.021 - dark gray
826.000.071 - red

with LED window:
829.000.011 - anthracite
829.000.021 - dark gray



Square key caps
pitch 19 mm

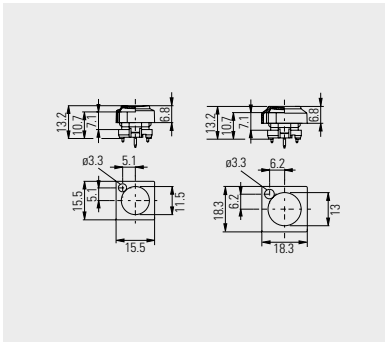


without LED window:
825.000.011 - anthracite

with LED window:
828.000.011 - anthracite
828.000.021 - dark gray



Round key caps

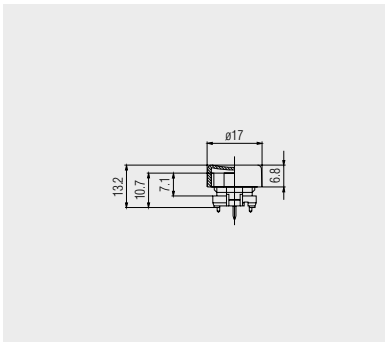


Key cap with ergonomic
actuation surface

840.000.011 - anthracite
840.000.021 - dark gray
840.000.071 - red



Design key caps

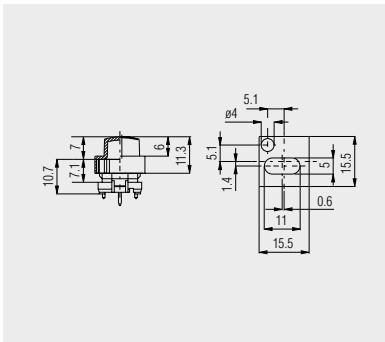

Key cap with oval actuation surface
pitch 16 mm


827.020.011 - anthracite
827.020.021 - dark gray

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH N' DRIVE



SERIES 6425 - KEY SWITCHES


TO 100 mA 28 V

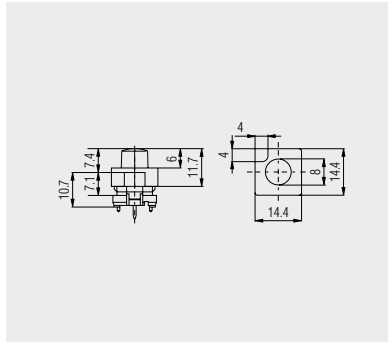

Key cap with round actuation surface
pitch ≥ 15 mm


- 827.100.011 - anthracite
- 827.100.021 - dark gray
- 827.100.031 - gray

Design key caps

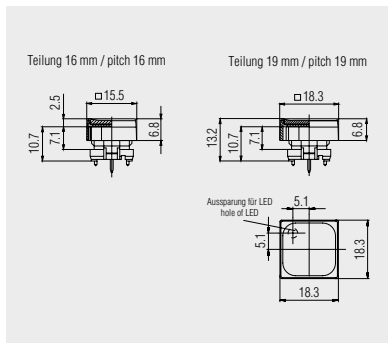

Key cap anthracite
Cap transparent, enclosed loose
834.900.013 pitch 19 mm
835.900.013 pitch 16 mm
Two-part key cap with snap-on
transparent caps, individual labeling
and color possibilities can be
implemented at low cost by a
customer inlay.
For keys 6425.51xx with LED and
6425.0101 without LED.


Key caps with transparent cap

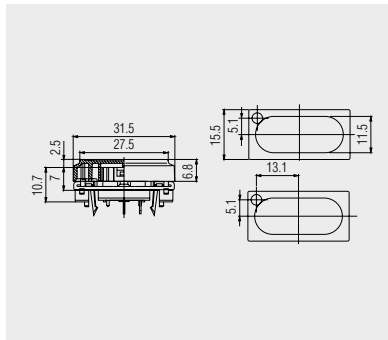

without LED window:
842.000.011 - anthracite
842.000.021 - dark gray

with one LED window:
842.500.011 - anthracite

Double key caps
16 mm pitch

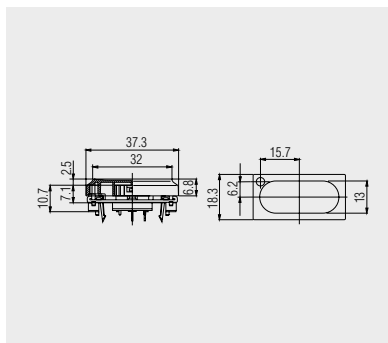

without LED window:
844.000.011 - anthracite

with one LED window:
844.500.011 - anthracite

Double key caps
19 mm pitch

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS


ECO

PUSH'N'DRIVE




SERIES 6425 - KEY SWITCHES


TO 100 mA 28 V




Triple key caps

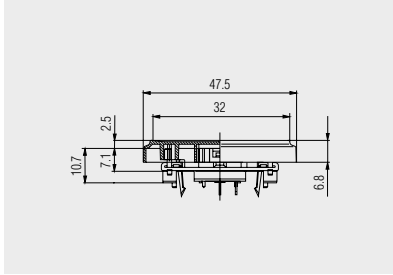


843.000.011 - anthracite
pitch 16 mm

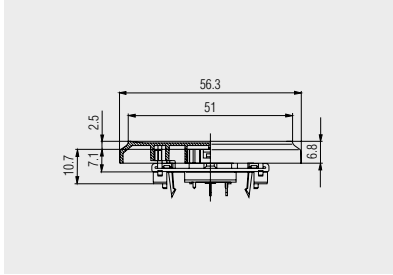

845.000.011 - anthracite
pitch 19 mm




Parallel guide

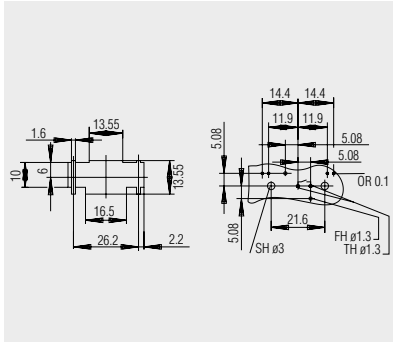


190.059.013
Recommended appliance cut-out and perforation pattern component side parallel guide for:
double key caps, pitch 16 mm

The parallel guide guarantees an optimum function even in case of off-center actuation and can be equipped additionally with one or two LEDs.



Parallel guide

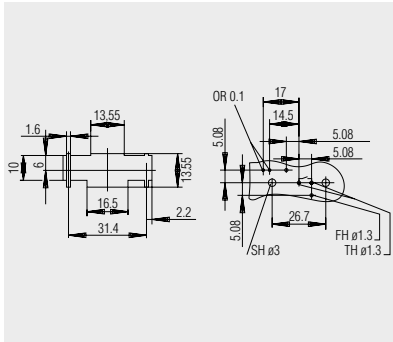

190.059.023
Recommended appliance cut-out and perforation pattern component side parallel guide for:
triple key caps, pitch 16 mm
double key caps, pitch 19 mm
triple key caps, pitch 19 mm


The parallel guide can be equipped additionally with a LED.

ROCKER SWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
TACT AND KEY SWITCHES
 SMP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH N' DRIVE



SERIES 6425 - KEY SWITCHES

TO 100 mA 28 V



Square key caps with white characters

Please complete the reference numbers by the three figures below the respective character.

Basic reference numbers for pitch 16 mm:
826 ... 011 - anthracite

Other key cap colors and characters on request.



051 052 053 054 055 056



057 058 059 060 061 062



063 064 065 066 067 068



069 070 071 072 073 074



075 076



017 018 022 023 170



010 001 002 003 004



005 006 007 008 009

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE



SERIES 6450 - KEY SWITCHES

TO 100 mA 28 V



PRODUCT FEATURES

- Single-pole normally open contact with key cap
- Narrow design with proven switching principle of series 6425
- Pleasant actuating characteristic and low actuation noise
- Low bounce time
- Long life endurance
- Standard with gold plated contacts

ON REQUEST

- Other key cap colors
- Labeled key caps

| | |
|---|----------------------|
| Contact resistance (new condition) | < 250 mOhm |
| Insulation resistance (new condition) | > 100 MOhm |
| Contact material | Au |
| Contact distance | < 3 mm |
| Bounce time | < 5 ms |
| Ambient temperature | -20 °C ... +80 °C |
| Material actuator housing terminals | PA PBTP tinned |
| Terminal type | PCB terminal |
| Mechanical life endurance | 1E6 bei 10mA 12V |

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SMAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH 'N' DRIVE



SERIES 3000 - KEY SWITCHES

TO 30 mA 28 V

PRODUCT FEATURES


- With one or two normally open contacts switching in sequence
- By separating the mechanical and electrical components, a high contact reliability and excellent actuating characteristic are achieved
- Terminals sealed
- For direct or indirect actuation

ON REQUEST


- Available with centrally placed LED (only version with a pressure point)
- Different key caps

| | |
|---|--|
| Mechanical life endurance | 1E5 2E4 (basic type 3003 - two pressure points) |
| Ambient temperature | -40 °C ... +85 °C |
| Material actuator housing terminals | PC / POM PA glass fiber-reinforced tinned |
| Contact material | Au CuSn gold-plated |
| Contact distance | < 3 mm |


| | 30 mA 28 V | Terminal type | Operating force (N) | Operating position (OP) (mm) | Free position (FP) max. (mm) | Permissible total travel position (TP) (mm) | Miscellaneous | Stock version |
|--|------------|---------------|---------------------|------------------------------|------------------------------|---|---|---------------|
| Normally open contact (SPNO) | | | | | | | | |
| 3000.0452 | ○ | U | 5 - 7 | 9.8 +0.3 -0.2 | 10.9 | 9.2 | | |
| Double normally open contact (SPNO) | | | | | | | | |
| 3003.0452 | ○ | U | 5 - 7 | 9.8 +0.3 -0.2 | 10.9 | 8.6 | operating force 2: 11 - 14 N operating position 2: 8.9 +0.3 -0.2 | |



Basic types 3000 and 3003

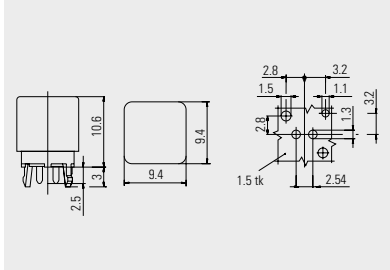

Normally open contact with one pressure point
3000.0452

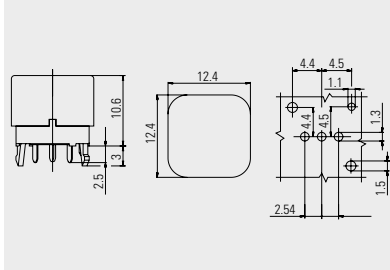

Double normally open contact with two pressure points
3003.0452

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SMP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH IN DRIVE

ORDER DAY AND NIGHT

In our web shop you can order more than 200 standard switches independent of time and place:
24 hours per day, 7 days per week.

➤ www.marquardt-shop.com





SNAP-ACTION SWITCHES

| | |
|-----------------------------|--|
| ROCKER SWITCHES | |
| PUSHBUTTON SWITCHES | |
| TOGGLE SWITCHES | |
| SLIDE SWITCHES | |
| ROTARY SWITCHES | |
| FOOT SWITCHES | |
| TACT AND KEY SWITCHES | |
| SNAP-ACTION SWITCHES | |
| MICRO-SIGNAL SWITCHES | |
| SENSORS | |
| ECO | |
| PUSH'N'DRIVE | |

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH'N'DRIVE



SERIES 1055

Subsubminiature snap-action switches IP 67
to 4 A 12 V or 2 A 24 V DC



▶ PAGE
178 – 182

SERIES 1050

Subminiature snap-action switches
to 10 (1.5) A 250 V AC



▶ PAGE
183 – 188

SERIES 1045

Subminiature snap-action switches
IP 67
to 10(3) A 250 V AC 1E4



▶ PAGE
189 – 196

SERIES 1080

Miniature snap-action switches
to 21 (8) A 250 V AC



▶ PAGE
197 – 200

SERIES 1005

Miniature snap-action switches
to 21 (8) A 250 V AC



▶ PAGE
201 – 208

SERIES 1040

Rotary shaft snap-action switches
to 4 (1) A 250 V AC



▶ PAGE
209 – 210

SERIES 1010

Open snap-action switches
to 6 (2) A 250 V AC



▶ PAGE
211 – 214



SNAP-ACTION SWITCHES

SERIES 1019

Single-pole snap-action switches
to 6 (2) A 250 V AC



▶ PAGE
215 – 217

SERIES 1022

Snap-action switches IP 67
to 4 A 12 V DC



▶ PAGE
218 – 219

SERIES 1117

Snap-action switches
to 16 (6) A 400 V AC



▶ PAGE
220 – 221

SERIES 1115

One pole pushbutton switches
to 16 (4) A 400 V AC



▶ PAGE
222 – 223



SERIES 1055 - SUBMINIATURE SNAP-ACTION SWITCHES IP 67

TO 4 A 12 V OR 2 A 24 V DC



PRODUCT FEATURES

- Compact design with dust and water protected switching system acc. to IP 67 (basic types 1055 / 1058)
- Large overtravel of ≥ 1.2 mm for small size
- The specially designed pushbutton guide enables a start-up angle of 40°
- The modular principle offers a wide selection of terminals, auxiliary actuators and fastening types

ON REQUEST

- Rating 0.5 (0.5) A 250 V AC 25E3 and ENEC approval mark
- For higher ambient temperatures
- Customized cable assembly
- Basic type 1058 as double switch or with cable outlet in other directions

| | |
|--|--|
| Mechanical life endurance | 5E5 |
| Contact resistance (new condition) | < 50 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Protection type | IP 00 terminal side basic types 1055 and 1056 IP 40 actuator side basic type 1056 IP 67 actuator side basic type 1055, terminal and actuator side basic type 1058 |
| Ambient temperature | -40 °C ... +85 °C |
| Flammability | UL 94 HB |
| Material | actuator: POM / LCP / silicone rubber additional actuator: stainless steel spring steel housing: PBTP terminals: tinned basic type 1058: wires FLRY 0.5 mm ² , tinned wire ends |
| Contact material | Ag gold plated |
| Approval marks | ☞ on request |
| Shock resistance | 50 g |
| Miscellaneous | terminal side sealed electrical life endurance at 24 V DC 2 A (ohmic load): 100E3, at 24 V DC 10 mA: 500E3 |

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE



SERIES 1055 - SUBSUBMINIATURE SNAP-ACTION SWITCHES IP 67

TO 4 A 12 V OR 2 A 24 V DC

| | | 4 A 12 V DC (ohmic load) | 2 A 24 V DC (ohmic load) | 0.5 (0.5) A 250 V AC 25E3 | Terminal type | Terminal description | Operating force (N) | Operating position (OP) (mm) | Difference travel max. (mm) | Free position (FP) max. (mm) | Permissible total travel position (TP) (mm) | Actuator description | Lever drawing | Miscellaneous | Stock version |
|---|---|--------------------------|--------------------------|---------------------------|---------------|----------------------|---------------------|------------------------------|-----------------------------|------------------------------|---|----------------------|---------------|-------------------------|---------------|
| Normally closed contact (SPNC) | | | | | | | | | | | | | | | |
| 1058.0395 | o | o | | | | 400 long crimped | ≤ 1.8 | 9.4 ±0.3 | 0.4 | 10.4 | 7.9 | | | pin right 1.5 long | |
| Normally open contact (SPNO) | | | | | | | | | | | | | | | |
| 1058.0373 | o | o | | | | 150 long | ≤ 1.8 | 9.4 ±0.3 | 0.4 | 10.4 | 7.9 | | | pin right 1.5 long | |
| 1058.0593 | o | o | | | | 300 long | ≤ 1.8 | 9.4 ±0.3 | 0.4 | 10.4 | 7.9 | | | pin both sides 5 long | |
| Changeover switch (SPDT momentary) | | | | | | | | | | | | | | | |
| 1055.0351 | o | o | | | | | ≤ 1.8 | 9.4 ±0.3 | 0.4 | 10.4 | 7.9 | | | pin right 1.5 long | o |
| 1055.0552 | o | o | | | | | ≤ 1.8 | 9.4 ±0.3 | 0.4 | 10.4 | 7.9 | | | pin left 5 long | |
| 1055.2061 | o | o | | | | coded cranked | ≤ 1.8 | 13.75 ±0.3 | 0.4 | 14.75 | 12.25 | | | without pin | |
| 1055.2351 | o | o | | | | | ≤ 1.8 | 9.4 ±0.3 | 0.4 | 10.4 | 7.9 | | | pin right 1.5 long | |
| 1055.3653 | o | o | | | | | ≤ 1.8 | 9.4 ±0.3 | 0.4 | 10.4 | 7.9 | | | pin right 2.5 long | |
| 1055.3654 | o | o | | | | | ≤ 1.8 | 9.4 ±0.3 | 0.4 | 10.4 | 7.9 | | | pin left 2.5 long | |
| 1055.5155 | o | o | | | | | ≤ 2.6 | 12.4 ±0.65 | 0.8 | 14.7 | 10.3 | | L21 | pin both sides 2.5 long | |
| 1055.5350 | o | o | | | | | ≤ 4.2 | 14.05 ±0.45 | 0.5 | 15.85 | 12.65 | | L02 | without pin | |
| 1055.8155 | o | o | | | | | ≤ 2.6 | 12.4 ±0.65 | 0.8 | 14.7 | 10.3 | | L21 | pin right 2.5 long | |
| 1056.0351 | o | o | | | | | ≤ 1.3 | 6.15 ±0.3 | 0.4 | 7.15 | 4.65 | | | pin right 1.5 long | |
| 1056.2351 | o | o | | | | | ≤ 1.3 | 6.15 ±0.3 | 0.4 | 7.15 | 4.65 | | | pin right 1.5 long | |
| 1056.3060 | o | o | | | | coded cranked | ≤ 1.3 | 10.5 ±0.3 | 0.4 | 11.5 | 9 | | | without pin | |
| 1056.3065 | o | o | o | | | coded cranked | ≤ 1.3 | 10.5 ±0.3 | 0.4 | 11.5 | 9 | | | without pin | |
| 1056.3351 | o | o | | | | | ≤ 1.3 | 6.15 ±0.3 | 0.4 | 7.15 | 4.65 | | | pin right 1.5 long | |
| 1056.3352 | o | o | | | | | ≤ 1.3 | 6.15 ±0.3 | 0.4 | 7.15 | 4.65 | | | pin left 1.5 long | |
| 1058.0351 | o | o | | | | 300 long | ≤ 1.8 | 9.4 ±0.3 | 0.4 | 10.4 | 7.9 | | | pin right 1.5 long | o |
| 1058.0553 | o | o | | | | 300 long | ≤ 1.8 | 9.4 ±0.3 | 0.4 | 10.4 | 7.9 | | | pin both sides 5 long | |
| 1058.0653 | o | o | | | | 300 long | ≤ 1.8 | 9.4 ±0.3 | 0.4 | 10.4 | 7.9 | | | pin both sides 2.5 long | o |
| 1058.5253 | o | o | | | | 300 long | ≤ 4.2 | 9.7 ±0.45 | 0.5 | 11.6 | 8.25 | | L31 | pin both sides 2.5 long | |

ROCKERSWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SNAP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH IN DRIVE




SERIES 1055 - SUBMINIATURE SNAP-ACTION SWITCHES IP 67


TO 4 A 12 V OR 2 A 24 V DC




Basic type 1055

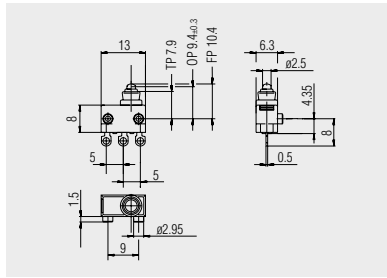


Solder terminal

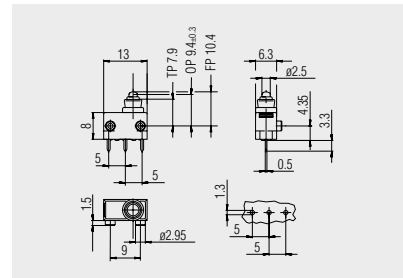


PCB terminal

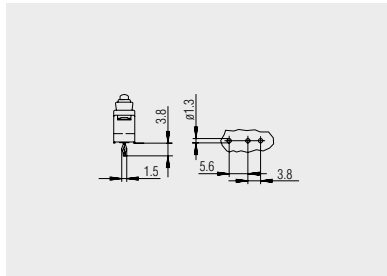

PCB terminal coded cranked

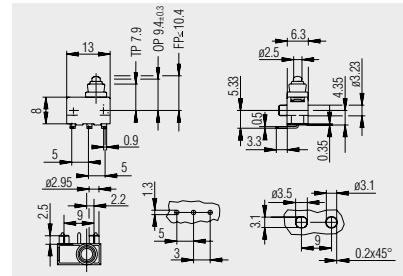

PCB terminal left angled

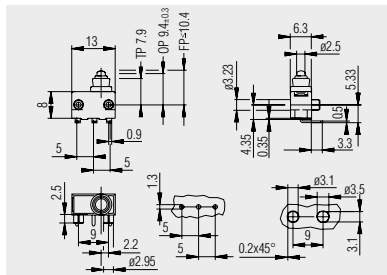

PCB terminal right angled

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE




SERIES 1055 - SUBMINIATURE SNAP-ACTION SWITCHES IP 67


TO 4 A 12 V OR 2 A 24 V DC




Basic type 1056

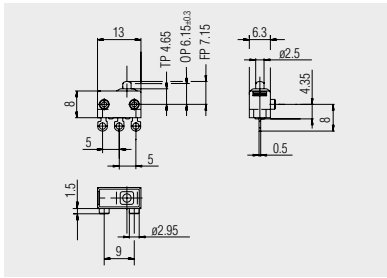


Solder terminal

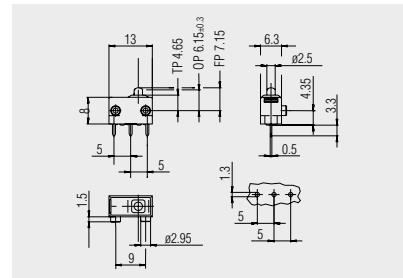


PCB terminal

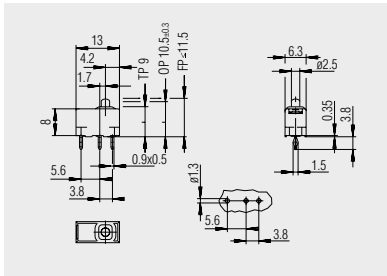

PCB terminal coded cranked

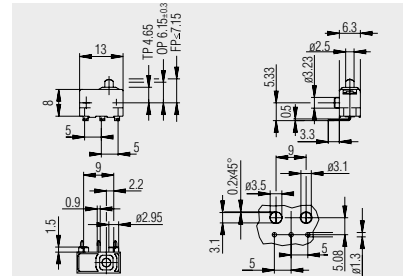


PCB terminal left angled

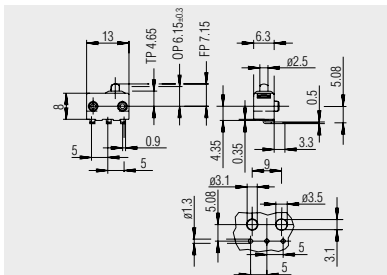

PCB terminal right angled



Basic type 1058

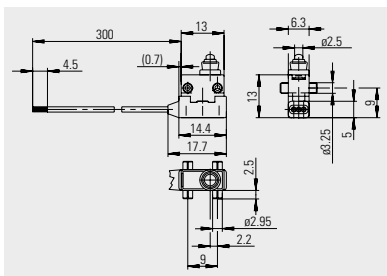


Cable 300 long

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH N' DRIVE



SERIES 1055 - SUBMINIATURE SNAP-ACTION SWITCHES IP 67

TO 4 A 12 V OR 2 A 24 V DC

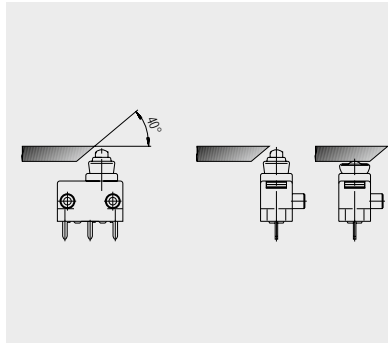

Approach angle up to 40°


The robust pushbutton guide allows actuations by slides or camshafts with an approach angle of < 40° (depending on the friction partner).

The mechanical life endurance depends on the material and surface properties of the slide and the installation situation in the appliance. Under optimum conditions and longitudinal actuation, 200E3 cycles can be achieved.


The above sketch can be transposed to the basic types 1056 and 1058.



Auxiliary actuators

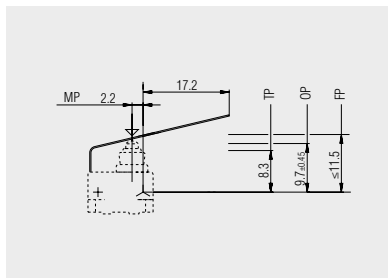


L02: straight lever
191.081.041

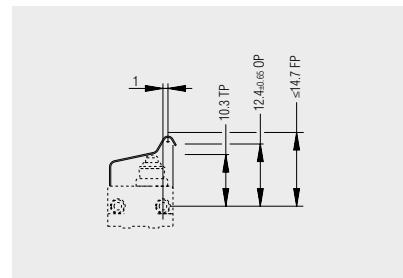


L21: simulated roller
191.081.031

The auxiliary actuators are available as additional parts for the basic types 1055 and 1058 for retrofitting or are already pre-assembled depending on the product. When assembling yourself, make sure that the lever is pushed into the housing slot right up to the stop.

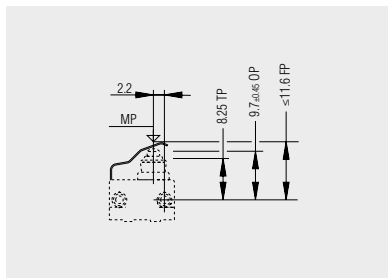

L31: differential lever
191.081.011

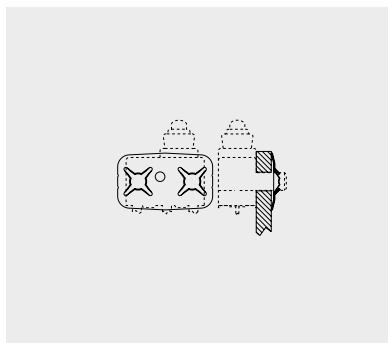

140.092.021
fastening disc for the basic types 1055, 1056 und 1058

The fastening disc offers a quick, reliable fastening possibility in combination with switches with 5 mm long pins to plates or plastic parts with a wall thickness up to 2.5 mm.

Fastening disc

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH/DRIVE



SERIES 1050 - SUBMINIATURE SNAP-ACTION SWITCHES

TO 10 (1.5) A 250 V AC



PRODUCT FEATURES

- Small, efficient snap-action switches up to 10 (1.5) A 250 V AC or 10.1 A 125 - 250 V AC 1/4 HP
- Lateral approach from both directions possible due to mushroom-shaped actuator
- Large selection of auxiliary actuators of chrome-nickel steel and plastic

ON REQUEST

- Extended overtravel
- Material conformant with the filament wire test acc. to IEC 60335-1:2001 chap. 30
- Increased or reduced difference travel
- Other operating forces and ratings
- Gold-plated contacts

| | |
|---|--|
| Design | DIN 41635 B |
| Mechanical life endurance | 10E6 1E6 (versions with auxiliary actuator) |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 175 PTI |
| Protection type | IP 40 (actuator side) |
| Ambient temperature | -40 °C ... +100 °C |
| Flammability | UL 94 V-2 |
| Glow wire test temperature | 850 °C |
| Material | additional actuator housing terminals |
| | PA glass fiber-reinforced / stainless steel spring steel PBTP tinned / silver plated / blank (product-dependent) |
| Bounce time | < 5 ms |
| Approval marks | |
| Suitable for appliances of protection class II under compliance with the installation conditions required on the equipment side | |

ROCKERSWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SNAP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH N' DRIVE



SERIES 1050 - SUBMINIATURE SNAP-ACTION SWITCHES

TO 10 (1.5) A 250 V AC

| | | 10 (1.5) A 250 V AC 1E4 | 5 A 250 V AC 5E4 | 2 (0.5) A 250 V AC 25E3 | 10.1 A 125 - 250 V AC 1/4 HP | 5 A 125 - 250 V AC 1/10 HP | 2 A 125 - 250 V AC | Terminal type | Terminal description | Contact material | Operating force (N) | Operating position (OP) (mm) | Difference travel max. (mm) | Free position (FP) max. (mm) | Permissible total travel position (TP) (mm) | Actuator description | Lever drawing | Miscellaneous | Stock version |
|---|--|-------------------------|------------------|-------------------------|------------------------------|----------------------------|--------------------|---------------|----------------------|------------------|---------------------|------------------------------|-----------------------------|------------------------------|---|----------------------|---------------|--|---------------|
| Normally closed contact (SPNC) | | | | | | | | | | | | | | | | | | | |
| 1050.1142 | | ○ | | | | ○ | | | 2.8 x 0.5 | Ag | ≤ 1.5 | 8.4 ± 0.3 | 0.2 | 9.3 | 7.5 | | | | |
| Normally open contact (SPNO) | | | | | | | | | | | | | | | | | | | |
| 1050.0122 | | ○ | | | | ○ | | | | Ag | ≤ 1.5 | 8.4 ± 0.3 | 0.2 | 9.3 | 7.5 | | | | ○ |
| 1050.1122 | | ○ | | | | ○ | | | 2.8 x 0.5 | Ag | ≤ 1.5 | 8.4 ± 0.3 | 0.2 | 9.3 | 7.5 | | | | ○ |
| 1050.2122 | | ○ | | | | ○ | | | sealed | Ag | ≤ 1.5 | 8.4 ± 0.3 | 0.2 | 9.3 | 7.5 | | | | |
| 1050.1426 | | | | | | | | | 2.8 x 0.5 | Ag | ≤ 1.5 | 9.9 ± 0.3 | 0.2 | 10.8 | 8.6 | | | greater overtravel without approval mark | |
| Changeover switch (SPDT momentary) | | | | | | | | | | | | | | | | | | | |
| 1050.0103 | | ○ | | | | ○ | | | | Ag | ≤ 2.2 | 8.4 ± 0.3 | 0.2 | 9.3 | 7.5 | | | | ○ |
| 1050.2403 | | ○ | | | | ○ | | | sealed | Ag | ≤ 2.2 | 8.4 ± 0.3 | 0.1 | 9.3 | 7 | | | greater overtravel | |
| 1050.0102 | | ○ | | | | ○ | | | sealed | Ag | ≤ 1.5 | 8.4 ± 0.3 | 0.2 | 9.3 | 7.5 | | | | ○ |
| 1050.0202 | | ○ | | | | ○ | | | | Ag | ≤ 1.5 | 9.9 ± 0.3 | 0.2 | 10.8 | 9.1 | | | | ○ |
| 1050.0802 | | ○ | | | | ○ | | | | Ag | ≤ 5 | 9.9 ± 0.3 | 0.2 | 10.8 | 9.3 | | | foam sealing ring around pushbutton | |
| 1050.1102 | | ○ | | | | ○ | | | 2.8 x 0.5 | Ag | ≤ 1.5 | 8.4 ± 0.3 | 0.2 | 9.3 | 7.5 | | | | ○ |
| 1050.1202 | | ○ | | | | ○ | | | 2.8 x 0.5 | Ag | ≤ 1.5 | 9.9 ± 0.3 | 0.2 | 10.8 | 9.1 | | | | ○ |
| 1050.2102 | | ○ | | | | ○ | | | sealed | Ag | ≤ 1.5 | 8.4 ± 0.3 | 0.2 | 9.3 | 7.5 | | | | ○ |
| 1050.2202 | | ○ | | | | ○ | | | sealed | Ag | ≤ 1.5 | 9.9 ± 0.3 | 0.2 | 10.8 | 9.1 | | | | ○ |
| 1050.3102 | | ○ | | | | ○ | | | | Ag | ≤ 1.5 | 8.4 ± 0.3 | 0.2 | 9.3 | 7.5 | | | fixing pin | ○ |
| 1050.4102 | | ○ | | | | ○ | | | | Ag | ≤ 1.5 | 8.4 ± 0.3 | 0.2 | 9.3 | 7.5 | | | fixing pin | ○ |
| 1050.5202 | | ○ | | | | ○ | | | sealed | Ag | ≤ 0.5 | 11.1 ± 1.5 | 1.0 | 15 | 7.4 | | L02 | | ○ |
| 1050.5702 | | ○ | | | | ○ | | | sealed | Ag | ≤ 0.6 | 16.2 ± 1.5 | 1.0 | 20 | 13 | | L12 | | ○ |
| 1050.6702 | | ○ | | | | ○ | | | 2.8 x 0.5 | Ag | ≤ 0.6 | 16.2 ± 1.5 | 1.0 | 20 | 13 | | L12 | | ○ |
| 1050.7202 | | ○ | | | | ○ | | | sealed | Ag | ≤ 0.5 | 11.1 ± 1.5 | 1.0 | 15 | 7.4 | | L02 | | ○ |
| 1050.7702 | | ○ | | | | ○ | | | sealed | Ag | ≤ 0.6 | 16.2 ± 1.5 | 1.0 | 20 | 13 | | L12 | | |
| 1050.0151 | | | ○ | | | ○ | | | sealed | Au | ≤ 1.5 | 8.4 ± 0.3 | 0.2 | 9.3 | 7.5 | | | | ○ |
| 1050.1151 | | | ○ | | | ○ | | | 2.8 x 0.5 | Au | ≤ 1.5 | 8.4 ± 0.3 | 0.2 | 9.3 | 7.5 | | | | ○ |
| 1050.2151 | | | ○ | | | ○ | | | sealed | Au | ≤ 1.5 | 8.4 ± 0.3 | 0.2 | 9.3 | 7.5 | | | | ○ |
| 1050.5251 | | | ○ | | | ○ | | | sealed | Au | ≤ 0.5 | 11.1 ± 1.5 | 1.0 | 15 | 7.4 | | L02 | | |
| 1050.5305 | | | ○ | | | ○ | | | sealed | Au | ≤ 0.6 | 16.6 ± 0.2 | 1.0 | 20 | 13.6 | | L43 | | ○ |




SERIES 1050 - SUBMINIATURE SNAP-ACTION SWITCHES


TO 10 (1.5) A 250 V AC




Terminal variants

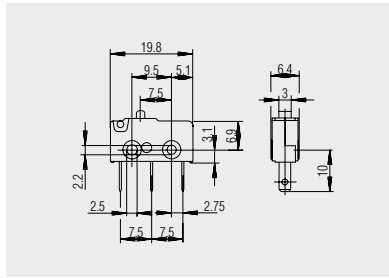


Quick-connect terminal 2.8 x 0.5

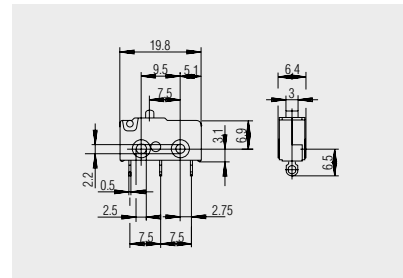


Solder terminal

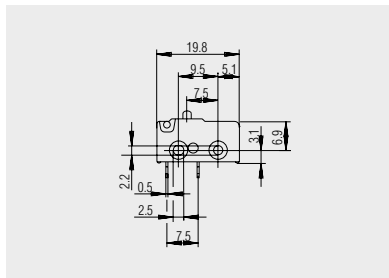


Solder terminal normally open contact version

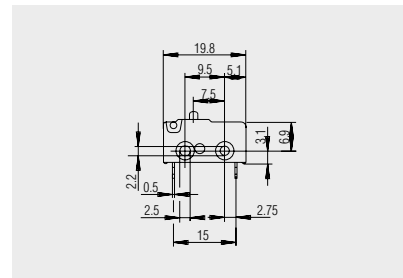


Solder terminal normally closed contact version

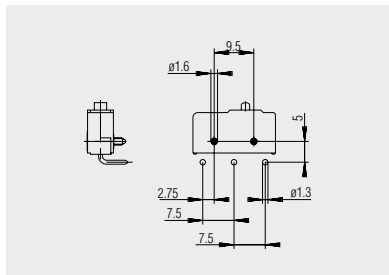

PCB terminal (cover side) right angled

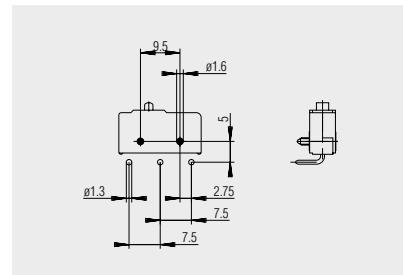

PCB terminal (base side) left angled

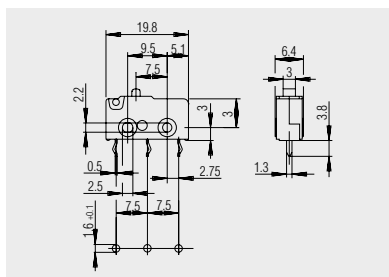


PCB terminal sealed

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH N' DRIVE




SERIES 1050 - SUBMINIATURE SNAP-ACTION SWITCHES

TO 10 (1.5) A 250 V AC

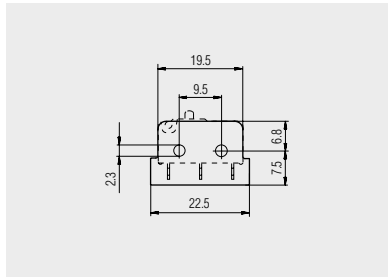

Additional parts

Insulating plate for solder terminal
0.5 mm: 231.005.021

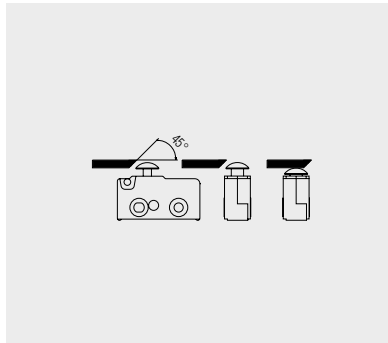

Mushroom-shaped actuator

The mushroom-shaped actuator allows, in addition to the vertical actuation from above, lateral approach from any direction. In such application cases, an angle of 45° is necessary on the actuating element (angle for versions with extended overtravel on request). To keep the friction here to a minimum, we recommend the use of materials with a low friction coefficient in relation to the material PA. In addition, the surface of the actuating element should be free from valleys. The mechanical life endurance depends on the material and surface properties as well as on the form of the slide.




SERIES 1050 - SUBMINIATURE SNAP-ACTION SWITCHES


TO 10 (1.5) A 250 V AC




Switching positions

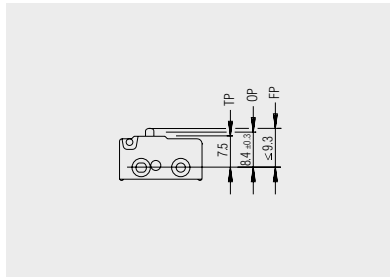


Standard actuator

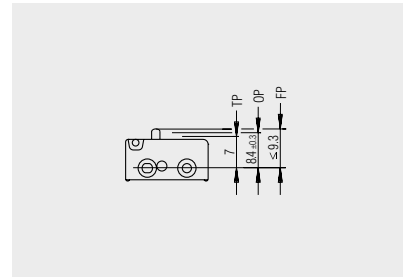


Standard actuator and extended overtravel

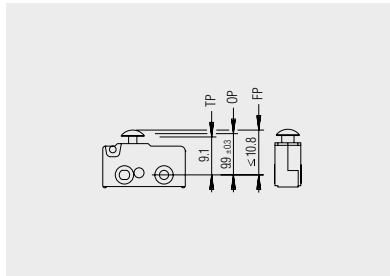

Mushroom-shaped actuator

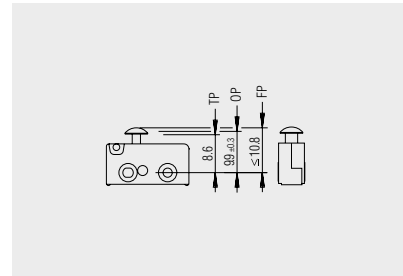

Mushroom-shaped actuator and extended overtravel

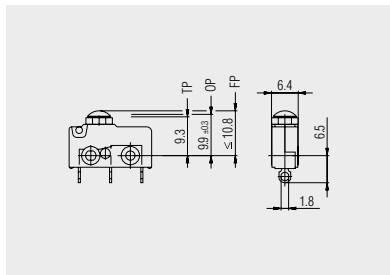

Mushroom-shaped actuator with foam sealing ring

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH N' DRIVE




SERIES 1050 - SUBMINIATURE SNAP-ACTION SWITCHES

TO 10 (1.5) A 250 V AC




Auxiliary actuators


The auxiliary actuators are available as additional parts for later assembly or are already pre-assembled depending on the product. In the adjustable versions the operating position can be set application-specifically by the set screw.

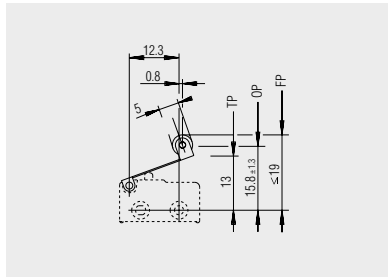


L11: roller lever
191.078.013

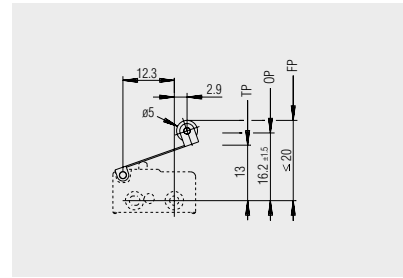


L12: roller lever
191.078.023

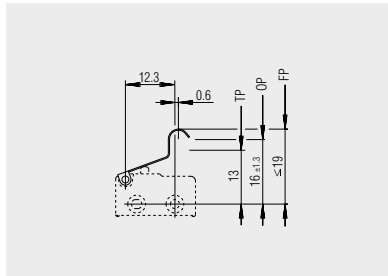


L21: simulated roller
191.071.041

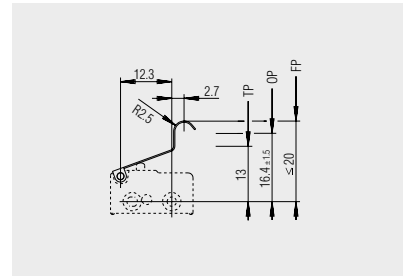


L22: simulated roller
191.071.051

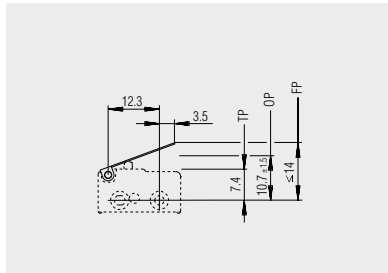


L01: straight lever
191.071.011

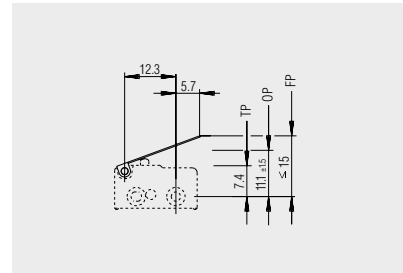


L02: straight lever
191.071.021

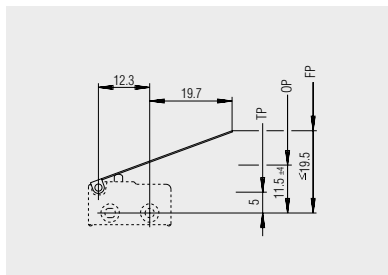


L03: straight lever
191.071.101

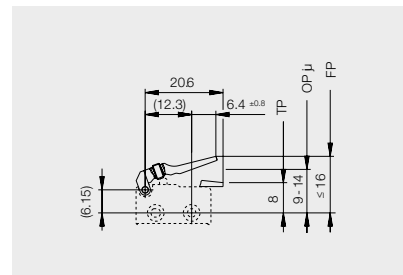

L41: adjustable plastic lever
190.075.013

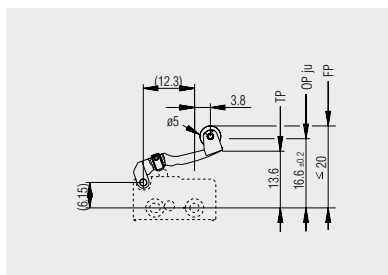

L43: adjustable roller lever
190.072.013

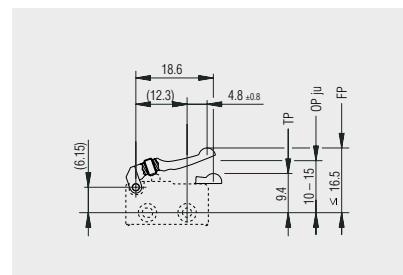

L45: adjustable simulated roller
190.074.013

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE



SERIES 1045 - SUBMINIATURE SNAP-ACTION SWITCH IP 67

TO 10(3) A 250 V AC 1E4




PRODUCT FEATURES

- Dust and water protected switching system according IP 67
- Rating from low DC signal currents to ratings of 10 (3)A 250 VAC
- Versions for high motor rating up to 6 (6) A 250 VAC
- Versions with integrated mechanism for breaking contact weldings
- IEC 60335 Chapter 30 approved for household appliances
- More than 10 million switching cycles

ON REQUEST

- Versions with reduced difference travel
- Versions with mounting pegs to the side
- With asymmetric pinning
- With customized wiring



| | |
|---|---|
| Design | DIN 41635 B |
| Mechanical life endurance | 10E6, tightness up to 1.5E6 cycles 1E6 (versions with auxiliary actuator) |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 00 terminal side basic types 1045 and 1046 IP 40 actuator side basic type 1046 IP 67 actuator side basic type 1045, terminal and actuator side basic type 1048 |
| Ambient temperature | -40 °C ... +100 °C |
| Flammability | UL 94 V-0 |
| Glow wire test temperature | 850 °C |
| Material additional actuator housing terminals | stainless steel spring steel PA Latamid glass fiber-reinforced tinned / faston terminals blank |
| Bounce time | < 5 ms |
| Approval marks |  (61058) |
| Suitable for appliances of protection class II under compliance with the installation conditions required on the equipment side | |

ROCKER SWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SNAP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH N' DRIVE



SERIES 1045 - SUBMINIATURE SNAP-ACTION SWITCH IP 67

TO 10(3) A 250 V AC 1E4

| | | | | | | |
|---|-------------------------------|---|---|--|-----------|---|
|  | | Changeover switch (SPDT momentary) | | | | |
| 5 (5) A 250 V AC 10E3 | | | | | 1048.1102 | |
| 1 A 250 V AC 100E3 | | | | | | ○ |
| 3 (3) A 250 V AC 30E3 | ○ | | | | | |
| 6 (1) A 250 V AC 30E3 | | | | | | |
| 2 (1) A 250 V AC 100E3 | | | | | | |
| 3 A 250 V AC 100E3 | | | | | | |
| 10 (3) A 250 V AC 10E3 | | | | | | ○ |
| 6 (6) A 250 V AC 30E3 | | | | | | |
| Terminal type | ⇓ | | | | ⇓ | ⇓ |
| Terminal description | | | | | | |
| Contact material | Ag | Au | Ag | | | |
| Operating force (N) | ≤ 2.6 | ≤ 1.9 | ≤ 2.0 | | | |
| Operating position (OP) (mm) | 8.4 ± 0.3 | 8.4 ± 0.3 | 15 ± 1 | | | |
| Difference travel max. (mm) | 0.2 | 0.2 | 0.7 | | | |
| Free position (FP) max. (mm) | 9.3 | 9.3 | 17 | | | |
| Permissible total travel position (TP) (mm) | 7.6 | 7.6 | 13.6 | | | |
| Actuator | IP 67 | IP 67 | IP 67 | | | |
| Actuator description | □ | □ |  | | | |
| Lever drawing | | | L22 | | | |
| Miscellaneous | cable outlet on actuator side | cable outlet down | lever on NC side mounted | | | |
| Stock version | ○ | ○ | ○ | | | |

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MIKRO-SIGNALSCHALTER

SENSORS

ECO

PUSH'DRIVE




SERIES 1045 - SUBMINIATURE SNAP-ACTION SWITCH IP 67


TO 10(3) A 250 V AC 1E4




Basic type 1045

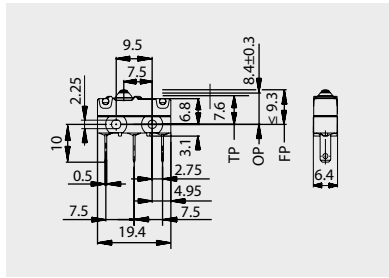


Quick-connect terminal 2.8 x 0.5 sealed

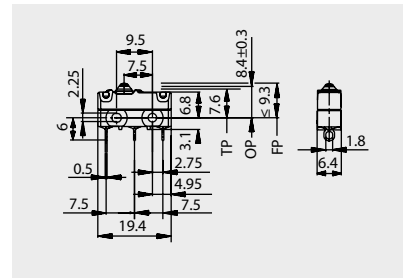


Solder terminal sealed

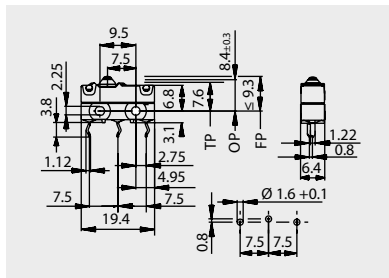


PCB terminal sealed, coded, cranked

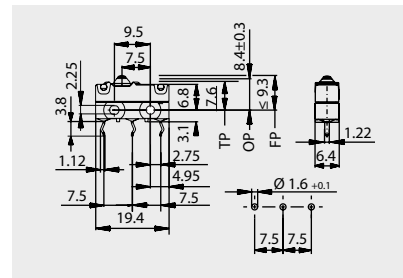

PCB terminal sealed, cranked

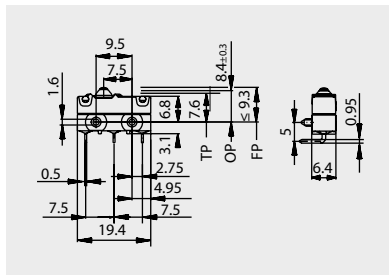

PCB terminal sealed, left angled

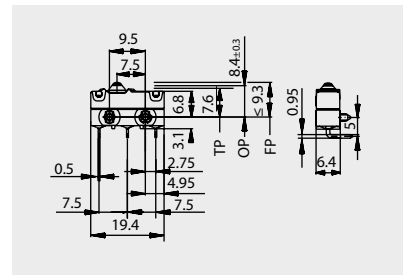


PCB terminal sealed, right angled

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH N' DRIVE



SERIES 1045 - SUBMINIATURE SNAP-ACTION SWITCH IP 67

TO 10(3) A 250 V AC 1E4

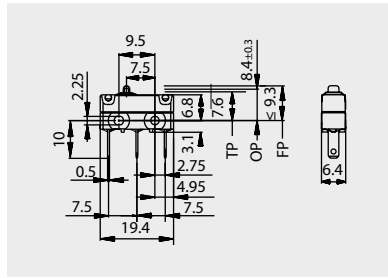


Basic type 1046


Quick-connect terminal 2.8 x 0.5 sealed



Basic type 1048

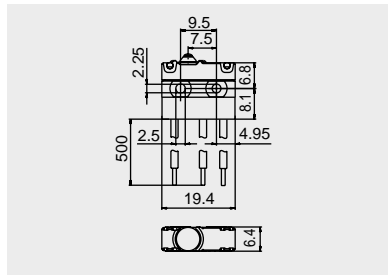


Cable, outlet down

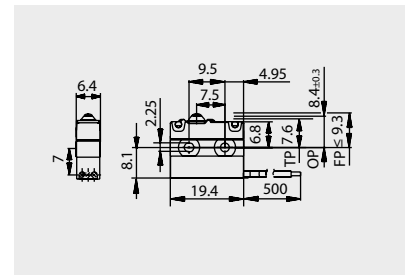


Cable, outlet NC side

Wires potted with switch, wire ends tinned

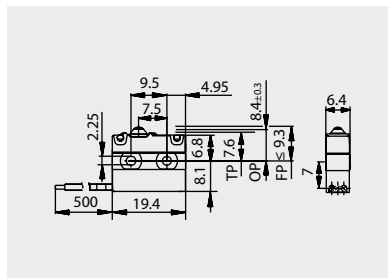

Cable, outlet C side

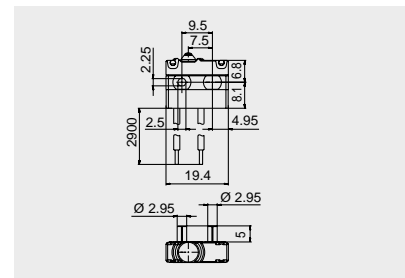

Cable, outlet down, normally open contact, mounting pegs

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE



SERIES 1045 - SUBMINIATURE SNAP-ACTION SWITCH IP 67


TO 10(3) A 250 V AC 1E4




Auxiliary actuators

The auxiliary actuators are available as additional parts for later assembly or are already pre-assembled depending on the product. In the adjustable versions the operating position can be set application-specifically by the set screw.


Switch versions without positive action feature a lever mounting point on the C and NC side, those with positive action only on the C side.

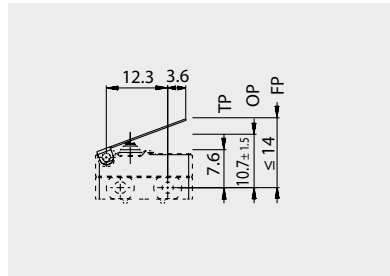


L01: straight lever
191.071.011

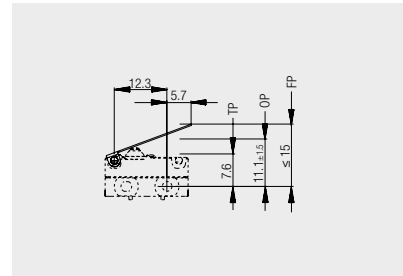


L02: straight lever
191.071.021

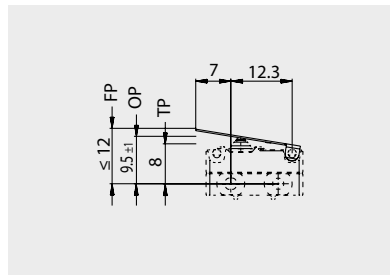


L02: straight lever, mounted on NC side
191.071.021

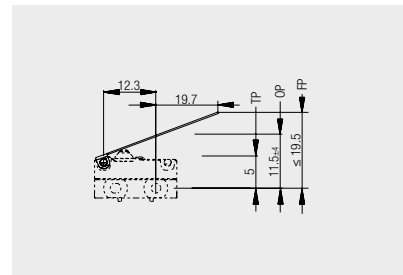


L03: straight lever
191.071.101

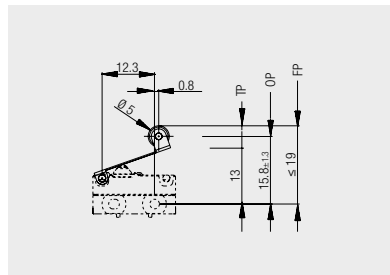


L11: roller lever
191.078.023

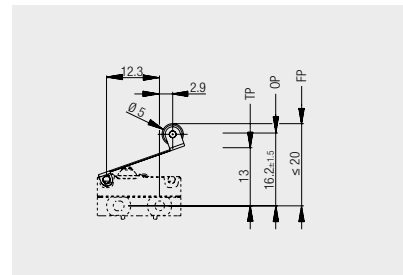


L12: roller lever
191.078.023

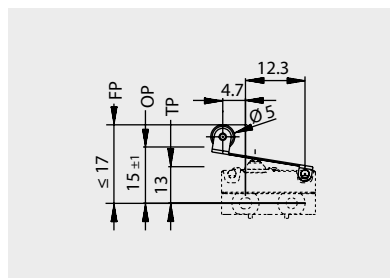


L12: roller lever, mounted on NC side
191.078.023

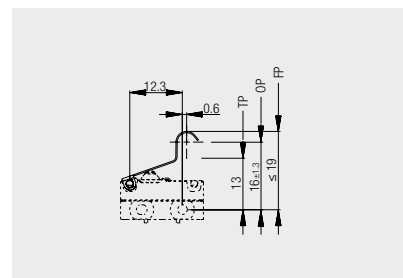

L21: simulated roller
191.071.041

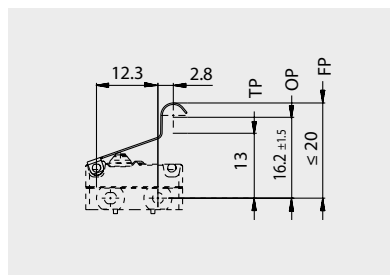

L22: simulated roller
191.071.051

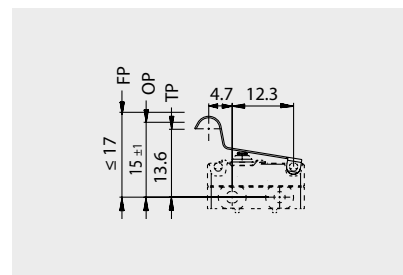

L22: simulated roller, mounted on NC side
191.071.051

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH-N-DRAW




SERIES 1045 - SUBMINIATURE SNAP-ACTION SWITCH IP 67


TO 10(3) A 250 V AC 1E4




Auxiliary actuators
(continue from page 195)

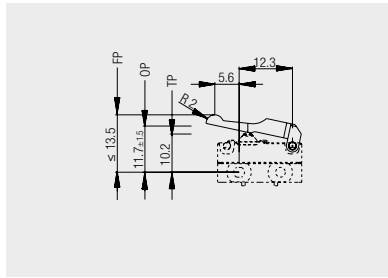


L32: simulated roller, mounted on NC side
190.372.041

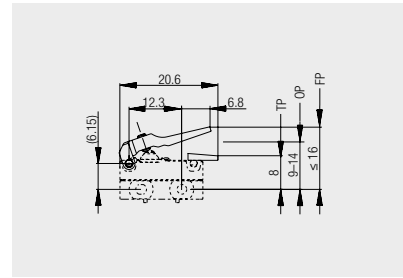

L41: adjustable plastic lever
190.075.013

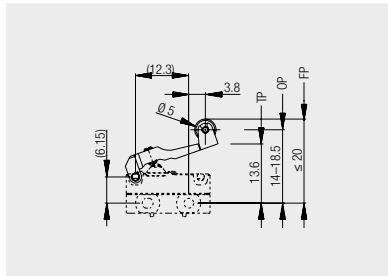

L43: adjustable roller lever
190.072.013

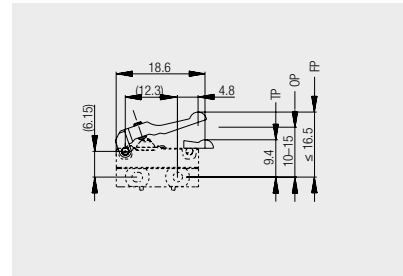

L45: adjustable simulated roller
190.074.013

Further information under

WWW.MARQUARDT-SWITCHES.COM



SERIES 1080 - MINIATURE SNAP-ACTION SWITCHES

T0 21 (8) A 250 V AC



PRODUCT FEATURES

- The precise mounting of the moving contact part (milled bearing blade) offers optimum snap-action even with slow actuation
- Wide range of ratings from 3 (1) A 250 V AC to 21 (8) A 250 V AC
- Versions with gold plated contacts for signal current applications
- Various auxiliary actuators, two suspension points

ON REQUEST

- Low operating forces (≤ 0.15 N)
- Customized additional actuators
- Plug terminal 4.8 x 0.5 mm































| | |
|---|--|
| Design | DIN 41635 A |
| Mechanical life endurance | 2E6 (basic type 1080) 20E4 (basic type 1085) |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 (actuator side) |
| Ambient temperature | -40 °C ... +125 °C |
| Flammability | UL 94 V-0 |
| Glow wire test temperature | 850 °C |
| Material | actuator: PETP glass fiber-reinforced additional actuator: stainless steel housing: PA glass fiber-reinforced / PETP glass fiber-reinforced terminals: silver plated / CuZn |
| Bounce time | < 10 ms |
| Approval marks | |
| Suitable for appliances of protection class II under compliance with the installation conditions required on the equipment side | |

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH IN DRIVE



SERIES 1080 - MINIATURE SNAP-ACTION SWITCHES

TO 21 (8) A 250 V AC

| | Normally closed contact (SPNC) | | Normally open contact (SPNO) | | | | | Changeover switch (SPDT momentary) | | | | | | | | | |
|---|--------------------------------|---|------------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
|  | | 1080.0464 | | 1080.0440 | 1080.0539 | 1085.0342 | 1080.0585 | | 1080.0103 | 1080.0203 | 1080.0304 | 1080.0403 | 1080.0903 | 1080.5906 | 1085.0103 | 1085.0403 | 1085.0375 |
| 21 (8) A 250 V AC 1E4 | | | | ○ | | | | | ○ | | | | | | | | |
| 16 (8) A 250 V AC 1E4 | | ○ | | ○ | ○ | | | | ○ | ○ | ○ | ○ | ○ | ○ | | | |
| 16 (4) A 250 V AC 5E4 | | | | ○ | ○ | | | | | | | | | | | | |
| 16 (4) A 250 V AC 25E3 | | | | | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |
| 10 (4) A 250 V AC 25E3 | | | | | | | | | | | | | | | | | |
| 6 (2) A 250 V AC 5E4 | | | | | | | | | | | | | | | | | |
| 4 (4) A 250 V AC 5E4 | | | | | | | | | | | | | | | | | |
| 3 (1) A 250 V AC 5E4 | | | | | | | | | | | | | | | | | |
| 3 (1) A 250 V AC 25E3 | | | | | | | | | | | | | | | | | ○ |
| 21 A 250 V AC 2 HP | | | | ○ | | | | | | | | | | | | | |
| 21 A 125 V AC 1 HP | | | | ○ | | | | | | | | | | | | | |
| 16 A 250 V AC 1/2 HP | | ○ | | | ○ | | | | | | | | | | | | |
| 16 A 125 - 250 V AC 1/2 HP | | | | | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |
| 16 A 125 V AC 1/3 HP | | ○ | | | ○ | | | | | | | | | | | | |
| 10 A 250 V AC 1/3 HP | | | | | | | | | | | | | | | | | |
| 10 A 125 V AC 1/8 HP | | | | | | | | | | | | | | | | | |
| 3 A 125 - 250 V AC | | | | | | | | | | | | | | | | | ○ |
| Terminal type | |  | |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Terminal description | | 6.3 | | 6.3 straight | 6.3 PITCH 5 | standing | | 6.3 PITCH 5 | | | standing | 6.3 | 4.8 x 0.8 | 4.8 x 0.5 straight | | 6.3 | standing |
| Contact material | | Ag | | Ag | Ag | Ag | Au | | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Au |
| Operating force (N) | | ≤ 1.0 | | ≤ 1.5 | ≤ 1.0 | ≤ 3.5 | ≤ 1.0 | | ≤ 1.0 | ≤ 1.0 | ≤ 1.0 | ≤ 1.0 | ≤ 1.0 | ≤ 0.5 | ≤ 4.0 | ≤ 4.0 | ≤ 1.7 |
| Operating position (OP) (mm) | | 14.7 ± 0.5 | | 14.7 ± 0.5 | 14.7 ± 0.3 | 14.4 ± 0.5 | 14.7 ± 0.5 | | 14.7 ± 0.5 | 14.7 ± 0.5 | 14.7 ± 0.5 | 14.7 ± 0.5 | 14.7 ± 0.5 | 15.2 ± 1.2 | 14.7 ± 0.5 | 14.7 ± 0.5 | 14.7 ± 0.5 |
| Difference travel max. (mm) | | 0.3 | | 0.3 | 0.3 | 0.8 | 0.3 | | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.7 | 0.3 | 0.3 | 0.3 |
| Free position (FP) max. (mm) | | 16.2 | | 16.2 | 16.2 | 16.2 | 16.2 | | 16.2 | 16.2 | 16.2 | 16.2 | 16.2 | 18.8 | 16.2 | 16.2 | 16.2 |
| Permissible total travel position (TP) (mm) | | 13.2 | | 13.2 | 13.2 | 13.2 | 13.2 | | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 11.7 | 13.2 | 13.2 | 13.2 |
| Actuator description | |  | |  |  |  |  | |  |  |  |  |  |  |  |  |  |
| Lever drawing | | | | | | | | | | | | | | L02 | | | |
| Contact distance (mm) | | < 3 | | < 3 | < 3 | > 3 | < 3 | | < 3 | < 3 | < 3 | < 3 | < 3 | < 3 | < 3 | < 3 | < 3 |
| EN 60335 cap. 30 conform "G" | | ○ | | | ○ | | ○ | | | | | | | | | | |
| Stock version | | | | | | | | | | | | ○ | | | | ○ | |




SERIES 1080 - MINIATURE SNAP-ACTION SWITCHES


TO 21 (8) A 250 V AC




Terminal variants

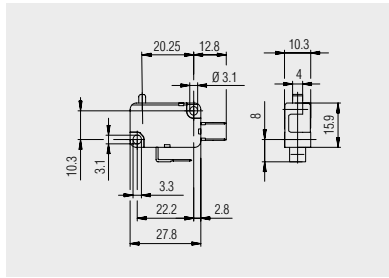


Quick-connect terminal 4.8 x 0.5 special version straight

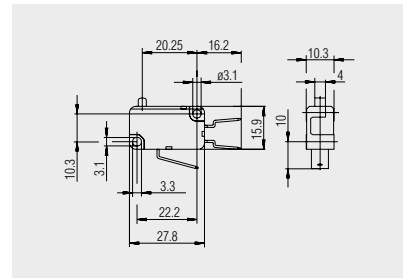


Quick-connect terminal 4.8 x 0.8

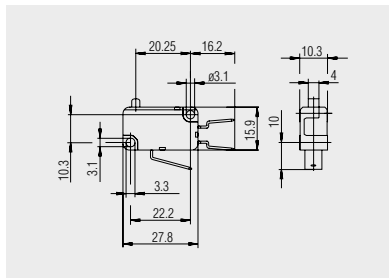


Quick-connect terminal 6.3 x 0.8

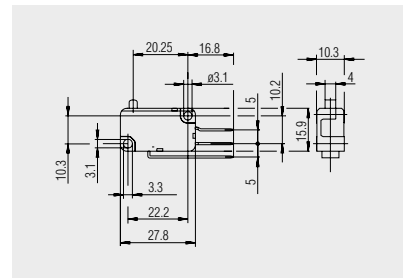


Quick-connect terminal 6.3 x 0.8 PITCH 5

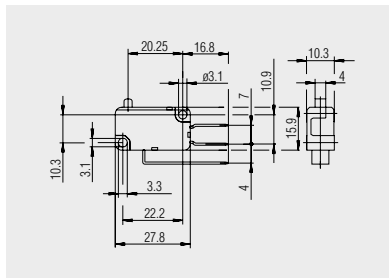


Quick-connect terminal 6.3 x 0.8 PITCH 7

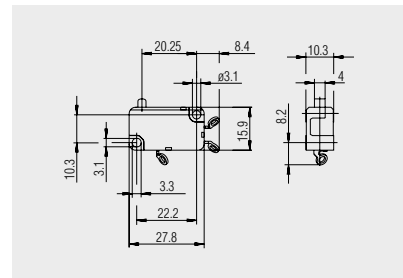

Solder terminal

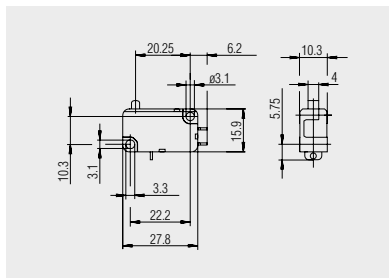

Short solder terminal

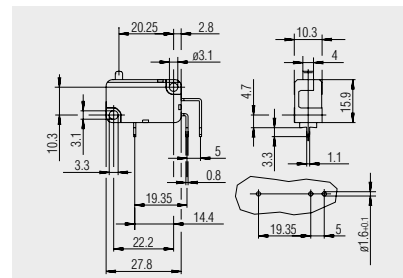


PCB terminal standing

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH N'DRIVE





SERIES 1080 - MINIATURE SNAP-ACTION SWITCHES

TO 21 (8) A 250 V AC

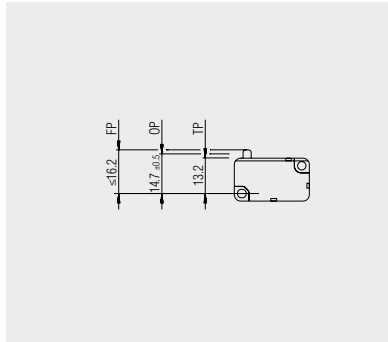

FP: free position
OP: operating position
TP: permissible total travel position



Switching positions

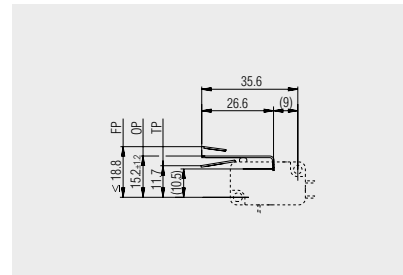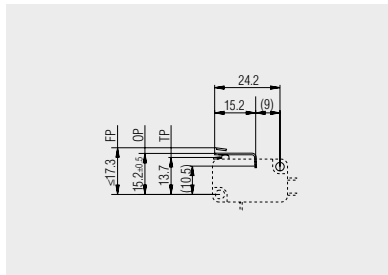

Auxiliary actuators



L01: straight lever
191.080.091

L02: straight lever
191.080.101

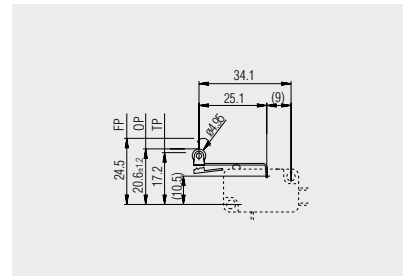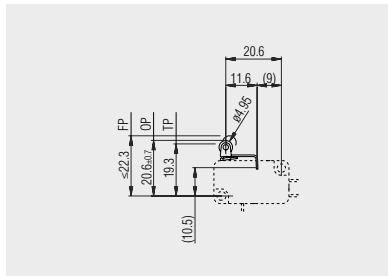

L11: roller lever
191.079.013

L12: roller lever
191.079.023

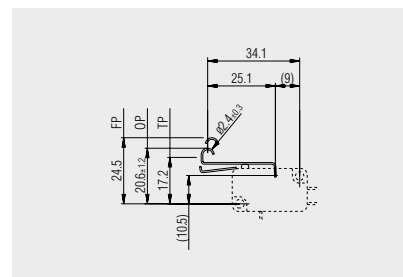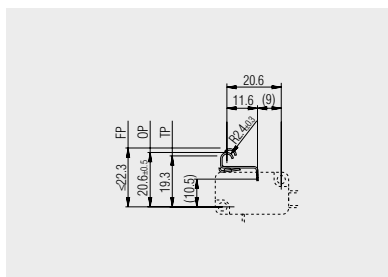

L21: simulated roller
191.080.451

L22: simulated roller
191.080.471

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS


ECO

PUSH'N'DRIVE



SERIES 1005 - MINIATURE SNAP-ACTION SWITCHES

TO 21 (8) A 250 V AC

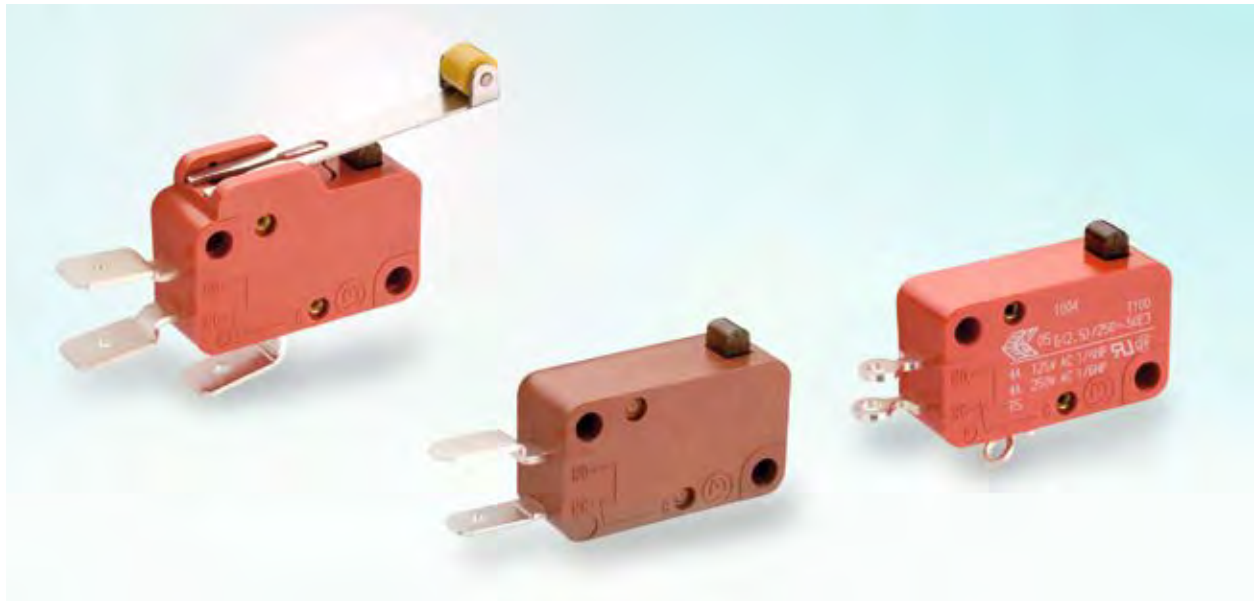

PRODUCT FEATURES

- Friction contact system whose shearing movement can loosen welding
- Very high inrush currents (capacitive)
- Contact distances less and greater than 3 mm
- Operating forces from 0.2 to 4.2 N

ON REQUEST

- Material conformant with the filament wire test acc. to IEC 60335-1:2001 chap. 30
- Side bearing terminal
- Electrical rating 16 (16) A 250 V 5E4 for normally closed and normally open version




























| | |
|---|---|
| Design | DIN 41635 A |
| Mechanical life endurance | 5E6 version with lever or contact spacing > 3 mm 10E6 standard version 5E4 version with curved spring steel lever |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Ambient temperature | -40 °C ... +100 °C on request ... +125 °C ... +85 °C |
| Flammability | UL 94 (housing: V-0, actuator: V-2) UL 94 V-2 |
| Glow wire test temperature | 850 °C |
| Material additional actuator housing terminals | galvanized steel / spring steel / stainless steel Duroplast type 182 / PA glass fiber-reinforced / PA Latamid silver plated / chromated |
| Bounce time | < 10 ms |
| Approval marks | |
| Suitable for appliances of protection class II under compliance with the installation conditions required on the equipment side | |

ROCKERSWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SNAP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH N' DRIVE



SERIES 1005 - MINIATURE SNAP-ACTION SWITCHES
































TO 21 (8) A 250 V AC

| | Normally closed contact (SPNC) | | | Normally open contact (SPNO) | | | Changeover switch (SPDT momentary) | | | | | | |
|---|---|---|---|---|---|---|--|---|---|---|---|---|---|
|  | 1005.1105 | 1005.1101 | 1006.3402 | 1005.2809 | 1005.1207 | 1005.1226 | 1005.2505 | 1005.0904 | 1005.1204 | 1005.1201 | 1005.4001 | 1005.0404 | 1005.1004 |
| 21 (8) A 250 V AC 25E3 | | | | ○ | | | | | | | | | |
| 20 (4) A 400 V AC 1E4 | | | | | ○ | | | | | | | ○ | ○ |
| 16 (16) A 250 V AC 5E4 | | | | | | ○ | | | | | | | |
| 16 (4) A 400 V AC 5E4 | | | | | | | | | | | | | |
| 16 (4) A 250 V AC 5E4 | | | | ○ | | | | | | | | | |
| 16 (4) A 250 V AC 25E3 | | | | | | | | | | | | | |
| 12 (12) A 250 V AC 5E4 | | | | | | | ○ | | | | | | |
| 10 (6) A 250 V AC 5E4 | ○ | | | | | | | ○ | ○ | | | ○ | ○ |
| 10 (4) A 400 V AC 1E4 | | ○ | ○ | | | | | | | ○ | ○ | | |
| 10 (4) A 250 V AC 5E4 | | | | | | | | | | | | | |
| 8 (8) A 250 V AC 5E4 | | | | ○ | | | | | | | | | |
| 6 (2.5) A 400 V AC 5E4 | | ○ | ○ | | | | | | | ○ | ○ | | |
| 6 (2.5) A 250 V AC 5E4 | | | | | | | | | | | | | |
| 21 A 250 V AC 2 HP | | | | ○ | | | | | | | | | |
| 21 A 125 V AC 1 HP | | | | ○ | | | | | | | | | |
| 16 A 250 V AC 2 HP | | | | | | ○ | | | | | | | |
| 16 A 125 V AC 1 HP | | | | | | | ○ | | | | | | |
| 16 A 125 - 250 V AC 1/2 HP | | | | | ○ | | | ○ | | | | ○ | ○ |
| 10 A 125 - 250 V AC 1/2 HP | ○ | | | | | | | | ○ | | | | |
| 10 A 125 - 250 V AC 1/4 HP | | ○ | ○ | | | | | | | ○ | ○ | | |
| 8 A 125 - 250 V AC 1/3 HP | | | | | | | | | | | | | |
| 4 A 125 - 250 V AC 1/6 HP | | | | | | | | | | | | | |
| Terminal type |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Terminal description | 6.3 | 6.3 | 6.3 | 4.8 top side | 6.3 | 6.3 straight | 4.8 straight | | 6.3 | 6.3 | | | 6.3 |
| Contact distance (mm) | Ag > 3 | Ag < 3 | Ag > 3 | Ag > 3 | Ag < 3 | Ag < 3 | Ag > 3 | Ag > 3 | Ag > 3 | Ag < 3 | Ag < 3 | Ag < 3 | Ag < 3 |
| Contact material | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag |
| Operating force (N) | 2.6 - 4.2 | 1.5 - 2.5 | 1.6 - 2.8 | 2.4 - 3.8 | 2.4 - 3.8 | 2.4 - 3.8 | 3.5 - 4.9 | 2.4 - 3.8 | 2.4 - 3.8 | 1.5 - 2.5 | 1.5 - 2.5 | 2.4 - 3.8 | 2.4 - 3.8 |
| Operating position (OP) (mm) | 14.6 ± 0.4 | 14.8 ± 0.4 | 20.5 ± 0.4 | 14.5 ± 0.3 | 14.7 ± 0.5 | 14.7 ± 0.5 | 14.4 ± 0.3 | 14.4 ± 0.3 | 14.4 ± 0.3 | 14.7 ± 0.5 | 14.7 ± 0.5 | 14.7 ± 0.5 | 14.7 ± 0.5 |
| Difference travel max. (mm) | 1.0 | 0.3 | 1.0 | 1.2 | 0.3 | 0.3 | 1.2 | 1.2 | 1.2 | 0.3 | 0.3 | 0.3 | 0.3 |
| Free position (FP) max. (mm) | 16 | 16 | 22.0 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 |
| Permissible total travel position (TP) (mm) | 13.4 | 13.4 | 19.3 | 13.4 | 13.4 | 13.4 | 13.4 | 13.4 | 13.4 | 13.4 | 13.4 | 13.4 | 13.4 |
| Actuator description |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Lever drawing | | | L21 | | | | | | | | | | |
| Miscellaneous | | | | | | | | | | | | | |
| Stock version | ○ | ○ | | | ○ | | | | ○ | | | ○ | ○ |



SERIES 1005 - MINIATURE SNAP-ACTION SWITCHES

TO 21 (8) A 250 V AC
















| | Changeover switch (SPDT momentary) | | | | | | | | | | | | | | |
|---|---|---|--|---|---|---|---|---|---|---|---|---|---|---|---|
|  | 1006.1514 | 1005.0507 | 1005.1010 | 1004.0509 | 1005.0101 | 1005.0401 | 1005.1001 | 1005.3501 | 1006.0701 | 1006.0901 | 1006.1011 | 1006.1101 | 1006.1201 | 1006.1301 | 1006.1401 |
| 21 (8) A 250 V AC 25E3 | ○ | | | | | | | | | | | | | | |
| 20 (4) A 400 V AC 1E4 | | | | | | | | | | | | | | | |
| 16 (16) A 250 V AC 5E4 | ○ | | | | | | | | | | | | | | |
| 16 (4) A 400 V AC 5E4 | | ○ | ○ | | | | | | | | | | | | |
| 16 (4) A 250 V AC 5E4 | | | | ○ | | | | | | | | | | | |
| 12 (12) A 250 V AC 5E4 | | | | | | | | | | | | | | | |
| 10 (6) A 250 V AC 5E4 | ○ | ○ | | | | | | | | | | | | | |
| 10 (4) A 400 V AC 1E4 | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 10 (4) A 250 V AC 5E4 | | | | ○ | | | | | | | | | | | |
| 8 (8) A 250 V AC 5E4 | | | ○ | | | | | | | | | | | | |
| 6 (2.5) A 400 V AC 5E4 | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 6 (2.5) A 250 V AC 5E4 | | | | | | | | | | | | | | | |
| 21 A 250 V AC 2 HP | | | | | | | | | | | | | | | |
| 21 A 125 V AC 1 HP | | | | | | | | | | | | | | | |
| 16 A 250 V AC 2 HP | | | | | | | | | | | | | | | |
| 16 A 125 V AC 1 HP | | | | | | | | | | | | | | | |
| 16 A 125 - 250 V AC 1/2 HP | ○ | ○ | | ○ | | | | | | | | | | | |
| 10 A 125 - 250 V AC 1/2 HP | | | ○ | | | | | | | | | | | | |
| 10 A 125 - 250 V AC 1/4 HP | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 8 A 125 - 250 V AC 1/3 HP | | | | | | | | | | | | | | | |
| 4 A 125 - 250 V AC 1/6 HP | | | | | | | | | | | | | | | |
| Terminal type |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Terminal description | 6.3 | | 6.3 | | M3 | | 6.3 | | | | | 6.3 | 6.3 | 6.3 | 6.3 |
| Contact distance (mm) | Ag < 3 | Ag < 3 | Ag > 3 | Ag < 3 | Ag < 3 | Ag < 3 | Ag < 3 | Ag < 3 | Ag < 3 | Ag < 3 | Ag < 3 | Ag < 3 | Ag < 3 | Ag < 3 | Ag < 3 |
| Contact material | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag | Ag |
| Operating force (N) | 1.2 - 2.1 | 2.4 - 3.8 | 2.4 - 3.8 | 0.8 - 1.8 | 1.5 - 2.5 | 1.5 - 2.5 | 1.5 - 2.5 | 1.5 - 2.5 | 1.5 - 2.5 | 0.8 - 1.4 | 0.7 - 1.25 | 1.5 - 2.5 | 1.5 - 2.5 | 0.3 - 0.55 | 0.8 - 1.4 |
| Operating position (OP) (mm) | 20.8 ± 1.2 | 14.7 ± 0.5 | 14.4 ± 0.3 | 14.7 ± 0.5 | 14.7 ± 0.5 | 14.7 ± 0.5 | 14.7 ± 0.5 | 14.7 ± 0.5 | 20.8 ± 0.5 | 15.4 ± 1.2 | 20.8 ± 1.2 | 15.3 ± 0.5 | 20.8 ± 0.5 | 15.7 ± 2.7 | 15.4 ± 1.2 |
| Difference travel max. (mm) | 0.9 | 0.3 | 1.2 | 0.1 - 0.25 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.7 | 0.9 | 0.3 | 0.3 | 1.8 | 0.7 |
| Free position (FP) max. (mm) | 23.5 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 22.1 | 18.2 | 23.5 | 16.6 | 22.1 | 21.5 | 18.2 |
| Permissible total travel position (TP) (mm) | 18 | 13.4 | 13.4 | 13.4 | 13.4 | 13.4 | 13.4 | 13.4 | 19.5 | 12.6 | 18 | 14 | 19.5 | 9.8 | 12.6 |
| Actuator description |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Lever drawing | L12 | | | | | | | | L11 | L02 | L12 | L01 | L11 | L04 | L02 |
| Miscellaneous | | | | milled bearing blade | | | | | | | | | | | |
| Stock version | | | | | ○ | ○ | ○ | | ○ | ○ | | | ○ | ○ | ○ |

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH IN DRIVE



SERIES 1005 - MINIATURE SNAP-ACTION SWITCHES

TO 21 (8) A 250 V AC

| | Changeover switch (SPDT momentary) | | | | | | |
|---|---|---|---|---|---|---|---|
| | 1006.1511 | 1006.1801 | 1006.4103 | 1006.4203 | 1004.4601 | 1004.0402 | 1004.1002 |
|  | | | | | | | |
| 21 (8) A 250 V AC 25E3 | | | | | | | |
| 20 (4) A 400 V AC 1E4 | | | | | | | |
| 16 (16) A 250 V AC 5E4 | | | | | | | |
| 16 (4) A 400 V AC 5E4 | | | | | | | |
| 16 (4) A 250 V AC 5E4 | | | | | | | |
| 16 (4) A 250 V AC 25E3 | | | | | | | |
| 12 (12) A 250 V AC 5E4 | | | | | | | |
| 10 (6) A 250 V AC 5E4 | | | | | | | |
| 10 (4) A 400 V AC 1E4 | ○ | ○ | ○ | ○ | | | |
| 10 (4) A 250 V AC 5E4 | | | | | ○ | | |
| 8 (8) A 250 V AC 5E4 | | | | | | | |
| 6 (2.5) A 400 V AC 5E4 | ○ | ○ | ○ | ○ | | | |
| 6 (2.5) A 250 V AC 5E4 | | | | | | ○ | ○ |
| 21 A 250 V AC 2 HP | | | | | | | |
| 21 A 125 V AC 1 HP | | | | | | | |
| 16 A 250 V AC 2 HP | | | | | | | |
| 16 A 125 V AC 1 HP | | | | | | | |
| 16 A 125 - 250 V AC 1/2 HP | | | | | | | |
| 10 A 125 - 250 V AC 1/2 HP | | | | | | | |
| 10 A 125 - 250 V AC 1/4 HP | ○ | ○ | ○ | ○ | | | |
| 8 A 125 - 250 V AC 1/3 HP | | | | | ○ | | |
| 4 A 125 - 250 V AC 1/6 HP | | | | | | ○ | ○ |
| Terminal type |  |  |  |  |  |  |  |
| Terminal description | 6.3 | 6.3 | | | 6.3 | | 6.3 |
| Contact distance (mm) | < 3 | < 3 | < 3 | < 3 | < 3 | < 3 | < 3 |
| Contact material | Ag | Ag | Ag | Ag | Ag | Ag | Ag |
| Operating force (N) | 0.7 - 1.25 | 1.5 - 2.5 | 1.5 - 2.5 | 1.5 - 2.5 | 0.5 - 1.1 | 0.2 - 0.6 | 0.2 - 0.6 |
| Operating position (OP) (mm) | 20.8 ± 1.2 | 22 ± 1 | 20.8 ± 0.5 | 20.8 ± 0.5 | 20.8 ± 0.5 | 14.7 ± 0.5 | 14.7 ± 0.5 |
| Difference travel max. (mm) | 0.9 | 0.6 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 |
| Free position (FP) max. (mm) | 23.5 | 24.5 | 22.1 | 22.1 | 22.1 | 16 | 16 |
| Permissible total travel position (TP) (mm) | 18 | 18.5 | 19.5 | 19.5 | 19.5 | 13.4 | 13.4 |
| Actuator description |  |  |  |  |  |  |  |
| Lever drawing | L12 | L31 | L11 | L11 | L11 | | |
| Miscellaneous | | | | | milled bearing blade | milled bearing blade | milled bearing blade |
| Stock version | ○ | | | | | ○ | ○ |





SERIES 1005 - MINIATURE SNAP-ACTION SWITCHES


TO 21 (8) A 250 V AC




Basic type 1005

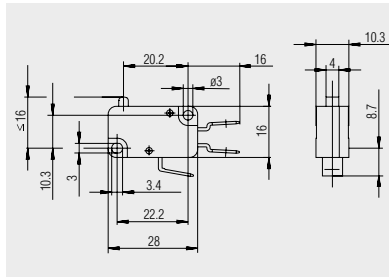


 Quick-connect terminal 6.3 x 0.8

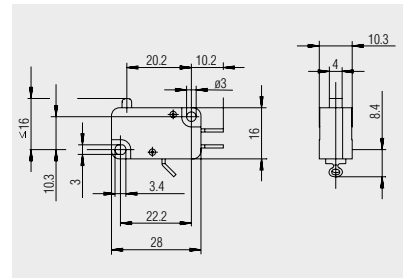


 Solder terminal

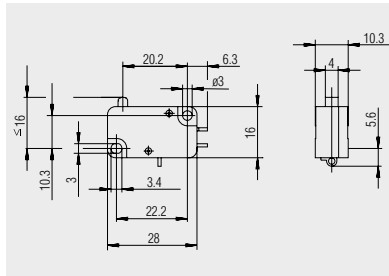


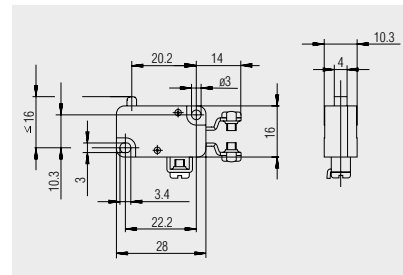
 Short solder terminal

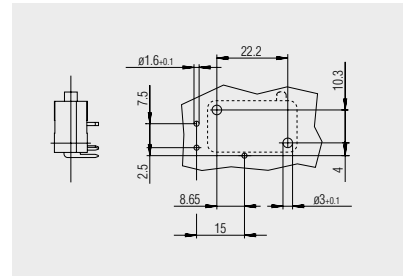


 PCB terminal (cover side)
right angled

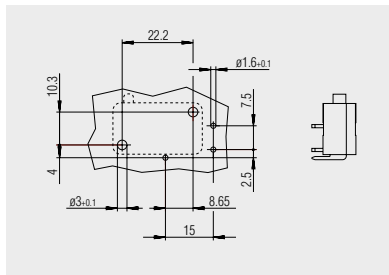

 PCB terminal (base side)
left angled



 Screw terminal M3

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH-N-DRIVE




SERIES 1005 - MINIATURE SNAP-ACTION SWITCHES


TO 21 (8) A 250 V AC




Basic type 1005

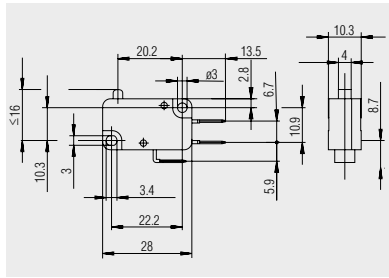


Quick-connect terminal 4.8 x 0.8 straight

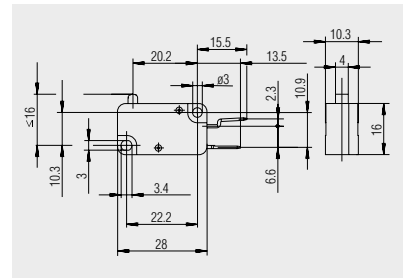

Quick-connect terminal 4.8 x 0.8 top side

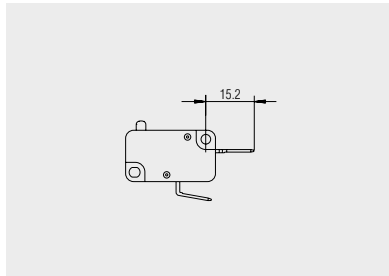


Quick-connect terminal 6.3 x 0.8 normally open contact version

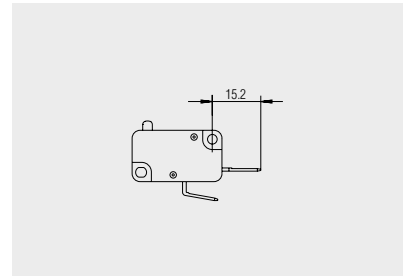

Quick-connect terminal 6.3 x 0.8 normally closed contact version



Basic types 1004 and 1005 switching positions

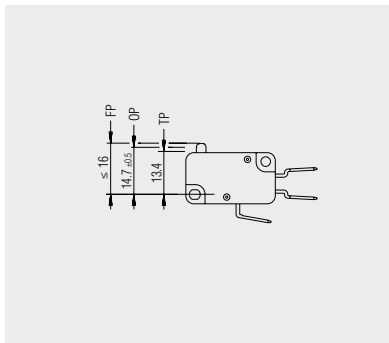

FP: free position

OP: operating position

TP: permissible total travel position

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE




SERIES 1005 - MINIATURE SNAP-ACTION SWITCHES


TO 21 (8) A 250 V AC




Basic type 1006
auxiliary actuator

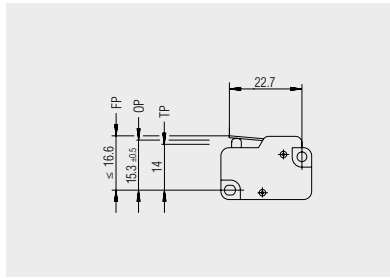


L01: straight lever

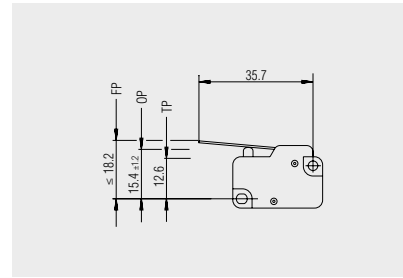


L02: straight lever

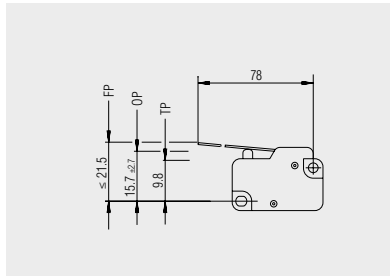


L04: straight lever

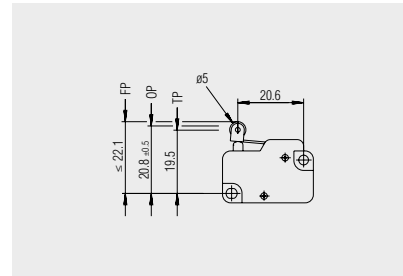


L11: roller lever

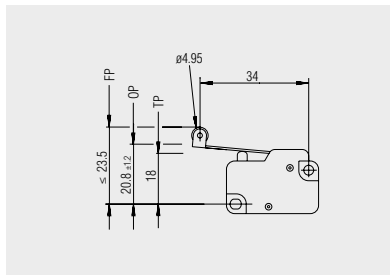

L12: roller lever

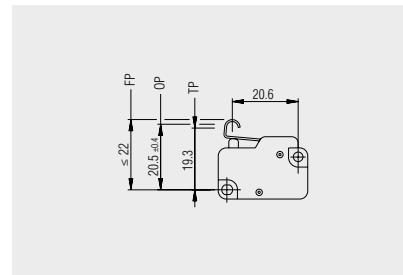

L21: simulated roller

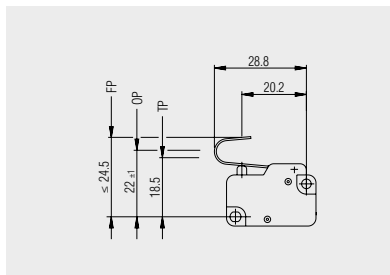

L31: spring lever

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS


ECO

PUSH 'N' DRIVE




SERIES 1005 - MINIATURE SNAP-ACTION SWITCHES

TO 21 (8) A 250 V AC

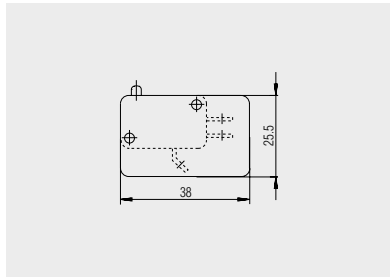


Insulating plate for solder terminal
0.5 mm: 231.009.011

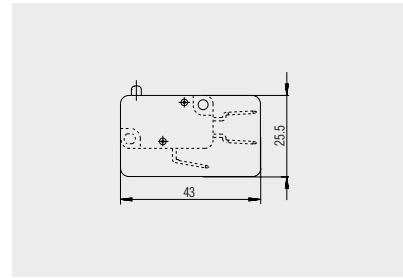

Insulating plate for quick-connect terminal
0.5 mm: 231.010.011
0.8 mm: 231.010.021

Additional parts

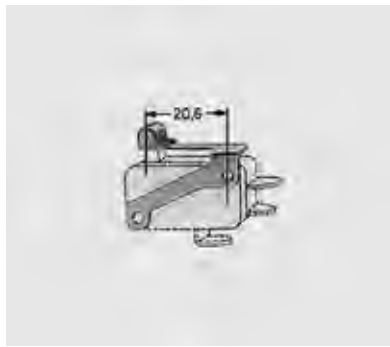

Stainless spring steel

Lever 20.6 long with roller diameter
5 out of PA yellow (to be mounted
lateral with the switch using screws)

191.013.013

Further information under

WWW.MARQUARDT-SWITCHES.COM

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS


ECO

PUSH'N'DRIVE



SERIES 1040 - ROTARY SHAFT SNAP-ACTION SWITCHES

TO 4 (1) A 250 V AC

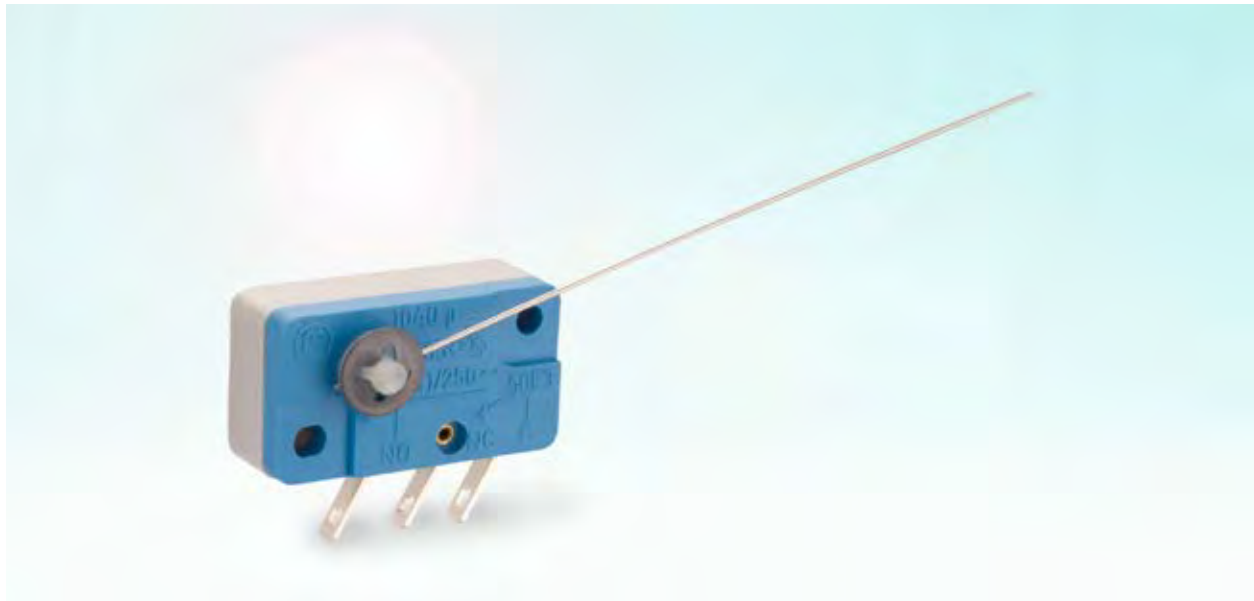

PRODUCT FEATURES

- Extremely low switching torques
- Spring steel auxiliary actuators which are easily adaptable to customer-specific installation conditions

ON REQUEST

- Other auxiliary actuators
- Normally open contact version

| | |
|--|--|
| Mechanical life endurance | 5E6 |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 actuator side IP 00 terminal side |
| Ambient temperature | -35 °C ... +85 °C |
| Flammability | UL 94 V-2 |
| Glow wire test temperature | 850 °C |
| Material | actuator additional actuator housing terminals |
| | PA glass fiber-reinforced stainless steel spring steel PA glass fiber-reinforced / PETP silver plated |
| Contact distance | < 3 mm |
| Approval marks | |

Suitable for appliances of protection class II under compliance with the installation conditions required on the equipment side


ROCKER SWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SNAP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH N' DRIVE




SERIES 1040 - ROTARY SHAFT SNAP-ACTION SWITCHES

TO 4 (1) A 250 V AC


| | 4 (1) A 250 V AC 5E4 | Terminal type | Terminal description | Contact material | Stock version |
|---|----------------------|---------------|----------------------|------------------|---------------|
| Changeover switch (SPDT momentary) | | | | | |
| 1040.0111 | ○ | | 2.8 | Ag | ○ |
| 1040.0114 | ○ | | 2.8 | Ag | ○ |
| 1040.0301 | ○ | | 2.8 | Au | |




1040.0111

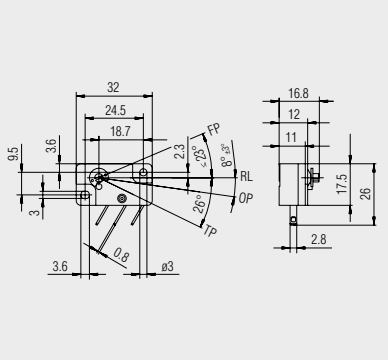


Enclosed loose: actuating lever 80 long, diameter 0.6 mm made of stainless spring steel and fastening disc
 FP: free position $\leq 23^\circ$
 OP: operating position $8^\circ \pm 3^\circ$
 TP: permissible total travel position 26°
 Pretravel angle max. 34°
 Overtravel angle min. 15°
 Difference angle $5^\circ-15^\circ$
 Switch actuating torque 0.6-0.9 Nmm
 End actuating torque min. 0.2 Nmm
 Reset torque min 0.15 Nmm




1040.0114

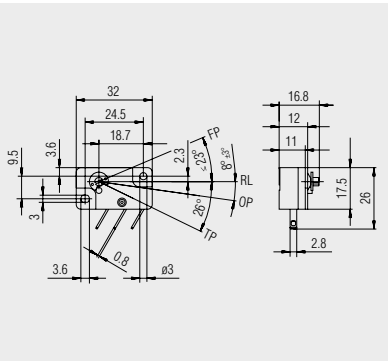

Enclosed loose: actuating lever 80 long, diameter 0.6 mm made of stainless spring steel and fastening disc
 FP: free position $\leq 23^\circ$
 OP: operating position $8^\circ \pm 3^\circ$
 TP: permissible total travel position 26°
 Pretravel angle max. 34°
 Overtravel angle min. 15°
 Difference angle $5^\circ-15^\circ$
 Switch actuating torque 0.9-1.7 Nmm
 End actuating torque min. 0.2 Nmm
 Reset torque min. 0.15 Nmm



1040.0301

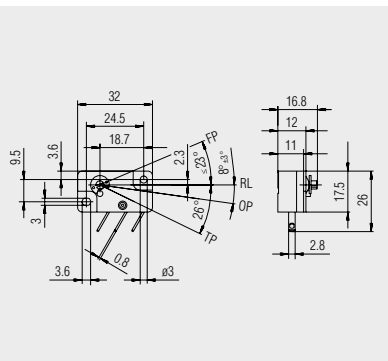

Without lever and fastening disc
 FP: free position $\leq 23^\circ$
 OP: operating position $8^\circ \pm 3^\circ$
 TP: permissible total travel position 46°
 Pretravel angle max. 34°
 Overtravel angle min. 35°
 Difference angle $5^\circ-15^\circ$
 Switch actuating torque 0.6-0.9 Nmm
 End actuating torque ≥ 0 Nmm
 Reset torque ≥ 0 Nmm



SERIES 1010 - OPEN SNAP-ACTION SWITCHES

TO 6 (2) A 250 V AC



PRODUCT FEATURES

- Powerful snap-action switch with C-spring contact system according to design DIN 41635C
- High switching reliability due to large contact forces directly after switching
- Small size, large travel and difference travel
- Short bounce time
- Contact system insensitive to vibrations

ON REQUEST

- Extended overtravel
- Special base forms
- Special actuating cams
- In addition to a wide range of normally closed contacts, normally open contacts and changeover switches and spring sets without snap function (basic type 1017) are available

| | |
|---|---|
| Design | DIN 41635 C |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 00 |
| Ambient temperature | -20 °C ... +85 °C ... 120 °C (basic type 1014) |
| Flammability | UL 94 V-2 or UL 94 HB |
| Glow wire test temperature | 850 °C |
| Material actuator housing terminals | spring steel / PA glass fiber-reinforced / PA / metal (only 1017.0153) PA glass fiber-reinforced / PA silver plated |
| Bounce time | < 5 ms |
| Approval marks | |
| Suitable for appliances of protection class II under compliance with the installation conditions required on the equipment side | |

ROCKER SWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SNAP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH IN DRIVE



SERIES 1010 - OPEN SNAP-ACTION SWITCHES

TO 6 (2) A 250 V AC

| | 6 (2) A 250 V AC 25E3 | 2 (0.5) A 250 V AC 20E4 | 2 (0.5) A 250 V AC 5E4 | 2 A 12 V DC 10E4 | 1 A 24 V DC 10E4 | 0.5 A 15 V 5E4 | 0.1 A 24 V DC 5E4 | 30 mA 12 V 5E4 | Terminal type | Terminal description | Contact material | Operating force (N) | Operating position (OP) (mm) | Difference travel max. (mm) | Free position (FP) max. (mm) | Permissible total travel position (TP) (mm) | Actuator description | Mechanical life endurance | Miscellaneous | Stock version |
|--|-----------------------|-------------------------|------------------------|------------------|------------------|----------------|-------------------|----------------|---------------|----------------------|--------------------|---------------------|------------------------------|-----------------------------|------------------------------|---|----------------------|---------------------------|--|---------------|
| Normally closed contact (SPNC) | | | | | | | | | | | | | | | | | | | | |
| 1010.7601 | | o | | | | | | | | 9.5 long | Ag | 0.25 - 0.6 | 2.2 ±0.6 | 0.9 | 0.4 | 3.5 | | 1E6 | | |
| Normally open contact (SPNO) | | | | | | | | | | | | | | | | | | | | |
| 1010.7401 | | o | | | | | | | | 9.5 long | Ag | 0.25 - 0.6 | 2.2 ±0.6 | 0.9 | 0.4 | 3.5 | | 1E6 | | |
| 1010.7402 | | o | | | | | | | | 9.5 long | Ag | 0.45 - 1.05 | 2.2 ±0.6 | 0.9 | 0.4 | 3.5 | | 1E6 | | |
| 1017.0801 | | | | | | o | | | | 9.2 long | CuBe silver plated | 0.15 - 0.5 | 2.2 ±0.6 | | 0 | 3.2 | | 1E6 | without approval mark | o |
| 1017.5701 | | | | | | o | | | | | CuSn silver plated | 0.15 - 0.5 | 1.4 ±0.6 | | 3.6 | 0.4 | | 1E6 | without approval mark | |
| 1017.0851 | | | | | | | o | | | 9.2 long | Au | 0.15 - 0.5 | 2.2 ±0.6 | | 0 | 3.2 | | 1E6 | without approval mark | |
| Changeover switch (SPDT momentary) | | | | | | | | | | | | | | | | | | | | |
| 1010.9705 | o | o | | | | | | | | | Au | 0.45 - 1.05 | 3.8 ±0.6 | 0.9 | 6.6 | 2 | | 10E4 | | |
| 1010.9752 | o | o | | | | | | | | | Ag | 0.45 - 1.05 | 6.9 ±0.6 | 0.9 | 9.7 | 5.1 | | 10E4 | | |
| 1010.9802 | o | o | | | | | | | | | Ag | 0.45 - 1.05 | 3.8 ±0.6 | 0.9 | 6.6 | 2 | | 10E4 | | |
| 1010.9852 | o | o | | | | | | | | | Ag | 0.45 - 1.05 | 6.9 ±0.6 | 0.9 | 9.7 | 5.1 | | 10E4 | | o |
| 1010.0101 | | o | | | | | | | | 6.5 long | Ag | 0.25 - 0.6 | 2.2 ±0.6 | 0.9 | 0.4 | 3.5 | | 1E6 | without approval mark | o |
| 1010.3001 | | o | | | | | | | | 6.5 long | Ag | 0.25 - 0.6 | 0.9 ±0.6 | 0.9 | 3.6 | 0.2 | | 1E6 | | |
| 1010.4402 | | o | | | | | | | | straight | Ag | 0.25 - 0.6 | 1.3 ±0.6 | 0.9 | 4.1 | 0 | | 1E6 | small base without approval mark | |
| 1010.0304 | | o | | | | | | | | 9.5 long | Ag | 0.25 - 0.6 | 2.2 ±0.6 | 0.9 | 0.4 | 3.5 | | 1E6 | | |
| 1010.2003 | | o | | | | | | | | 9.5 long | Au | 0.45 - 1.05 | 2.2 ±0.6 | 0.9 | 0.4 | 3.5 | | 1E6 | | |
| 1010.4103 | | o | | | | | | | | straight | Au | 0.25 - 0.6 | 2.2 ±0.6 | 0.9 | 0.4 | 3.5 | | 1E6 | without approval mark | o |
| 1010.6002 | | o | | | | | | | | standing | Au | 0.45 - 1.05 | 11.2 ±0.6 | 0.9 | 13.8 | 9.9 | | 1E6 | | o |
| 1010.6003 | | o | | | | | | | | standing | Ag | 0.25 - 0.6 | 11.2 ±0.6 | 0.9 | 13.8 | 9.9 | | 1E6 | | o |
| 1010.7102 | | o | | | | | | | | 6.5 long | Ag | 0.45 - 1.05 | 2.2 ±0.6 | 0.9 | 0.4 | 3.5 | | 1E6 | without approval mark | |
| 1010.7172 | | o | | | | | | | | 6.5 long | Au | 0.45 - 1.05 | 0.9 ±0.6 | 0.9 | 3.6 | 0.2 | | 1E6 | without approval mark | |
| 1010.7352 | | o | | | | | | | | 9.5 long | Ag | 0.45 - 1.05 | 0.9 ±0.6 | 0.9 | 3.6 | 0.2 | | 1E6 | | |
| 1010.8102 | | o | | | | | | | | straight | Ag | 0.45 - 1.05 | 2.2 ±0.6 | 0.9 | 0.4 | 3.5 | | 1E6 | without approval mark | |
| 1014.6151 | | | o | o | | | | | | standing | Au | 0.3 - 0.8 | 6.6 ±0.5 | 0.6 | 8.6 | 5.3 | | 50E4 | without approval mark | |
| Changeover switch with OFF position in the center (SPDT momentary - Center OFF) | | | | | | | | | | | | | | | | | | | | |
| 1017.0153 | | | | | | o | | | | 9.2 long | Au | | ≤ 2.1 | | 0 | 0.5 | | 1E6 | without approval mark operating range max. 4.2 | |




SERIES 1010 - OPEN SNAP-ACTION SWITCHES

TO 6 (2) A 250 V AC



Basic type 1010




PCB terminal vertical:

A switch actuation vertical to the PCB can be implemented in a confined space with this version.



Basic type 1014




Vertical PCB terminal:

According to the same functional principle as basic type 1010, but in smaller size.


This basic type is designed for low voltages and has no approval mark.




Basic type 1017 without snap function

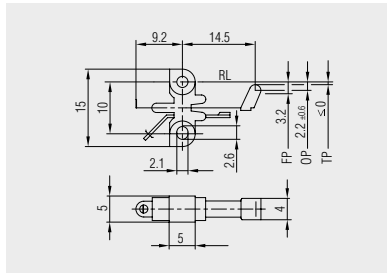

Solder terminal normally open contact version

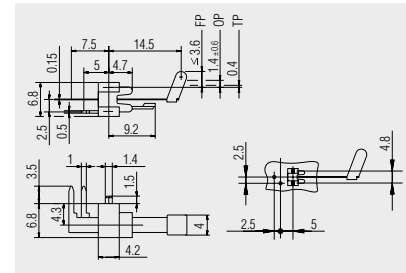

PCB terminal left angled



Changeover switch with OFF position in the center

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS


ECO

PUSH'N'DRIVE



SERIES 1019 - SINGLE-POLE SNAP-ACTION SWITCHES

TO 6 (2) A 250 V AC

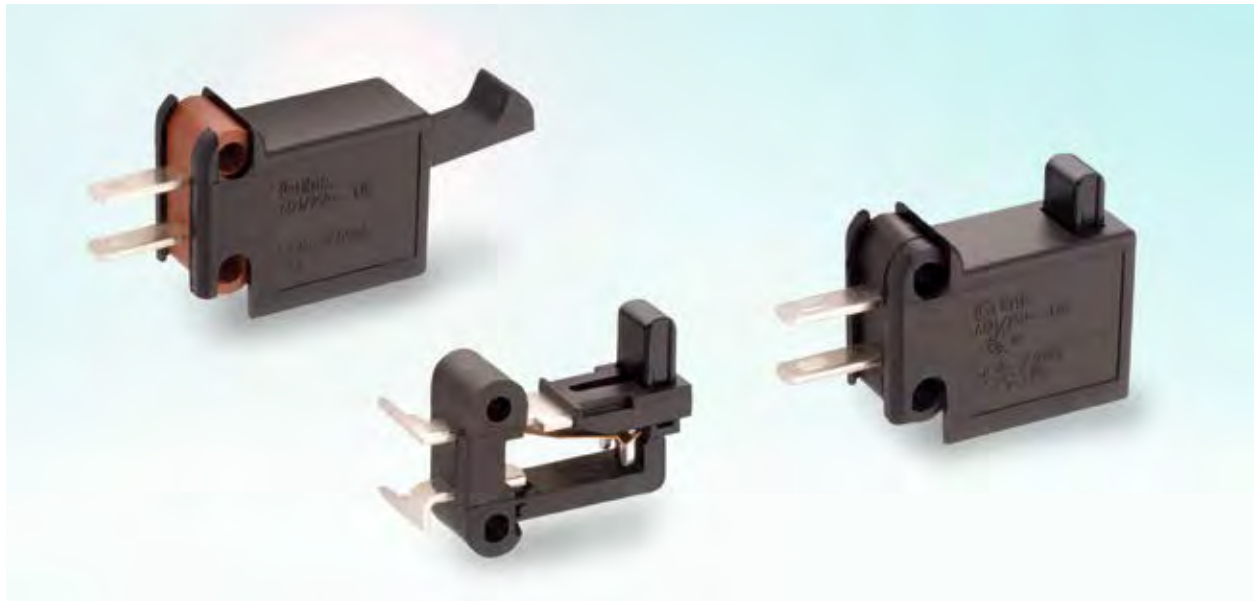




PRODUCT FEATURES

- Snap-action switches with and without housing
- Contact distance > 3 mm
- Normally open contact and normally closed contact version

ON REQUEST

- Gold-plated contacts
- Customized lever variants

| | |
|---|--|
| Mechanical life endurance | 20E4 |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Ambient temperature | -40 °C ... +85 °C |
| Flammability | UL 94 (socket, lever: V-0, actuator: V-2) |
| Glow wire test temperature | 850 °C |
| Material actuator housing terminals | PA glass fiber-reinforced / PA PA glass fiber-reinforced silver plated |
| Contact distance | > 3 mm |
| Approval marks |  /  housing variants /  |
| Suitable for appliances of protection class II under compliance with the installation conditions required on the equipment side | |

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH-IN DRIVE



SERIES 1019 - SINGLE-POLE SNAP-ACTION SWITCHES

TO 6 (2) A 250 V AC

| | | 6 (2) A 250 V AC 1E4 | 5 A 125 - 250 V AC | Terminal type | Terminal description | Contact material | Operating force (N) | Operating position (OP) (mm) | Difference travel max. (mm) | Free position (FP) max. (mm) | Permissible total travel position (TP) (mm) | Actuator description | Miscellaneous | Stock version |
|---------------------------------------|---|----------------------|--------------------|---------------|----------------------|------------------|---------------------|------------------------------|-----------------------------|------------------------------|---|----------------------|---------------|---------------|
| Normally closed contact (SPNC) | | | | | | | | | | | | | | |
| 1019.3101 | ○ | | | 2.8 | Ag | 0.9 - 1.7 | 6.3 ±0.8 | 2.4 | 1 | 10.5 | | | | |
| 1019.5501 | ○ | ○ | | 2.8 | Ag | 0.9 - 1.7 | 6.3 ±0.8 | 2.4 | 1 | 10.5 | | with housing | | |
| 1019.5601 | ○ | ○ | | 2.8 | Ag | 1.5 - 3 | 2.4 ±0.6 | 1.2 | 4.7 | 0 | | with housing | ○ | |
| Normally open contact (SPNO) | | | | | | | | | | | | | | |
| 1019.0101 | ○ | | | 2.8 | Ag | 1.5 - 3 | 2.4 ±0.6 | 1.2 | 4.7 | 0.5 | | | | |
| 1019.0201 | ○ | | | | Ag | 1.5 - 3 | 2.4 ±0.6 | 1.2 | 4.7 | 0.5 | | | | |
| 1019.0301 | ○ | | | | Ag | 1.5 - 3 | 2.4 ±0.6 | 1.2 | 4.7 | 0.5 | | | | |
| 1019.2101 | ○ | | | 2.8 | Ag | 0.9 - 1.7 | 6.3 ±0.8 | 2.4 | 1 | 10.5 | | | | ○ |
| 1019.5101 | ○ | ○ | | 2.8 | Ag | 1.5 - 3 | 2.4 ±0.6 | 1.2 | 4.7 | 0 | | with housing | ○ | |
| 1019.5401 | ○ | ○ | | 2.8 | Ag | 0.9 - 1.7 | 6.3 ±0.8 | 2.4 | 1 | 10.5 | | with housing | | |

Further information under

WWW.MARQUARDT-SWITCHES.COM




SERIES 1019 - SINGLE-POLE SNAP-ACTION SWITCHES


TO 6 (2) A 250 V AC




Open design with pushbutton

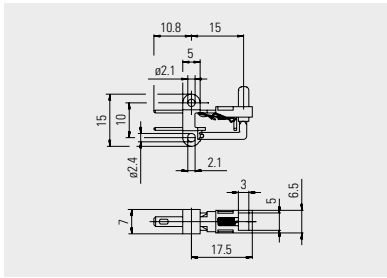

Quick-connect terminal 2.8 x 0.8

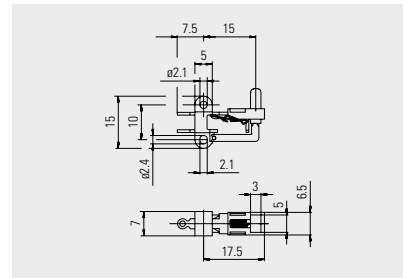


Solder terminal

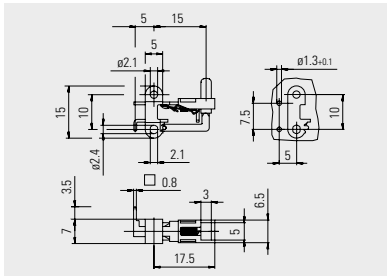

PCB terminal
left angled




Open form with lever

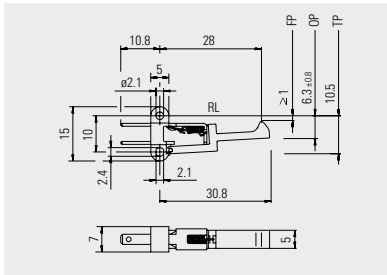

Quick-connect terminal 2.8 x 0.8




Closed design with pushbutton

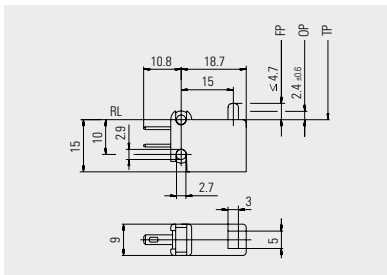

Quick-connect terminal 2.8 x 0.8



Closed design with lever

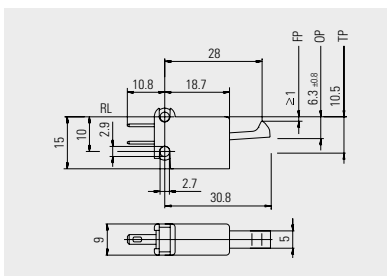


Quick-connect terminal 2.8 x 0.8

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH N'DRIVE



SERIES 1022 - SNAP-ACTION SWITCHES IP 67

TO 4 A 12 V DC

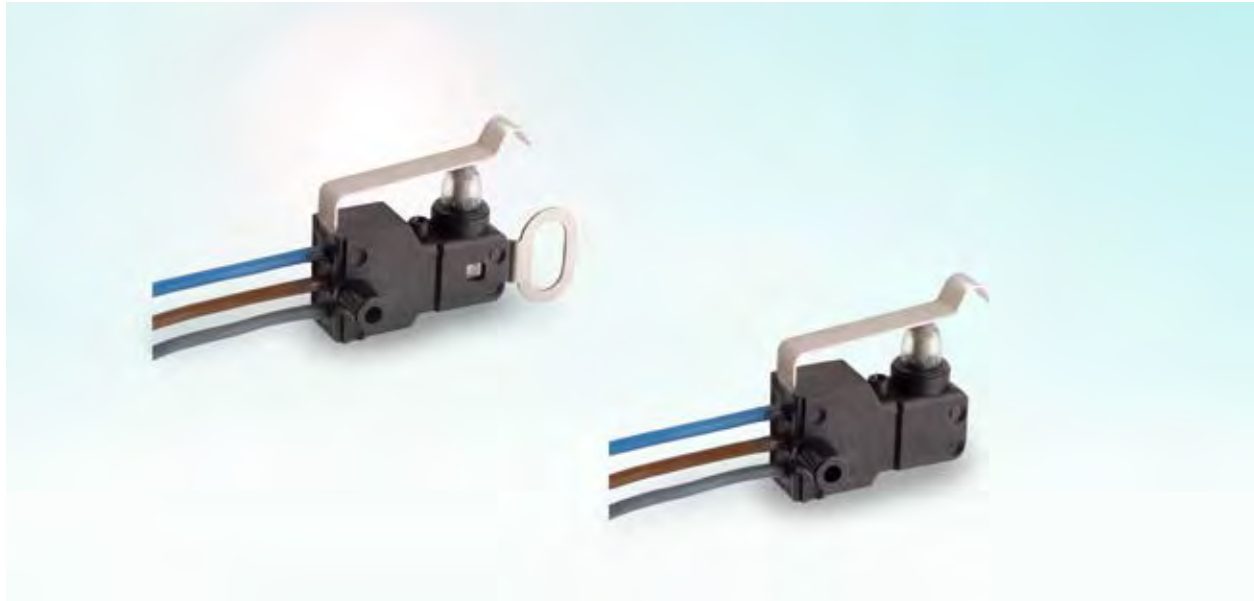

PRODUCT FEATURES

- Dust and water protection actuator and terminal side
- Ice-proof lever bearing
- Small size, large travels
- High switching reliability due to great contact forces directly after switching
- Series with different fastening possibilities

ON REQUEST

- Customized assembly with connecting plugs
- Other auxiliary actuators

| | |
|--|--|
| Mechanical life endurance | 10E4 |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 67 |
| Ambient temperature | -40 °C ... +85 °C |
| Flammability | UL 94 V-2 |
| Material | actuator additional actuator housing |
| | POM / silicone rubber stainless steel spring steel PBTP |
| Bounce time | < 5 ms |
| Contact distance | < 3 mm |
| Contact material | gold plated |
| Terminal description | 500 mm long (terminal wires 0.5 mm ² molded with switch, tinned wire ends) |



SERIES 1117 - SNAP-ACTION SWITCHES

TO 16 (6) A 400 V AC



PRODUCT FEATURES

- Double interrupting jump contact switching system
- Contact distance > 3 mm
- Material conformant with the filament wire test acc. to IEC 60 335-1:2001 chap. 30 and UL 94 V-0
- Large overtravel
- Actuator can be approached from all directions
- Normally open contact and normally closed contact versions

ON REQUEST

- Customized versions
- Changeover basic type 1115 and 1116

| | |
|--|---|
| Mechanical life endurance | 10E4 |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 |
| Ambient temperature | -40 °C ... +85 °C |
| Flammability | UL 94 V-0 |
| Glow wire test temperature | 850 °C |
| Material actuator housing terminals | PA glass fiber-reinforced PA glass fiber-reinforced silver plated |
| Contact material | Ag |
| Contact distance | ≥ 3 mm |
| Approval marks | |
| Suitable for appliances of protection class II under compliance with the installation conditions required on the equipment side | |

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO


PUSH'DRIVE




SERIES 1117 - SNAP-ACTION SWITCHES

TO 16 (6) A 400 V AC

| | 16 (6) A 400 V AC 1E4 | 12 A 250 V AC 1/2 HP | 12 A 125 V AC 1/6 HP | Terminal type | Terminal description | Contact distance (mm) | Operating force (N) | Operating position (OP) (mm) | Difference travel max. (mm) | Free position (FP) max. (mm) | Permissible total travel position (TP) (mm) | Stock version |
|---------------------------------------|-----------------------|----------------------|----------------------|---------------|----------------------|-----------------------|---------------------|------------------------------|-----------------------------|------------------------------|---|---------------|
| Normally closed contact (SPNC) | | | | | | | | | | | | |
| 1117.0206 | ○ | ○ | ○ | | 6.3 | ≥ 3 | 3.5 ± 0.5 | 12.4 ± 0.5 | 2.6 | 15.2 | 8.5 | ○ |
| Normally open contact (SPNO) | | | | | | | | | | | | |
| 1117.0106 | ○ | ○ | ○ | | 6.3 | ≥ 3 | 3.5 ± 0.5 | 12.4 ± 0.5 | 2.6 | 15.2 | 8.5 | ○ |



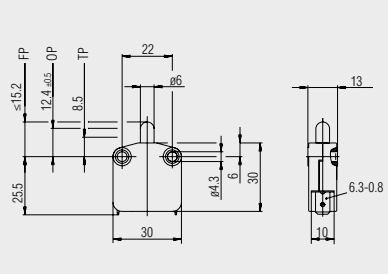

Quick-connect terminal 6.3 x 0.8

Basic type 1117

ROTARY SWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SNAP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH 'N' DRIVE



SERIES 1115 - SINGLE-POLE PUSHBUTTON SWITCHES

TO 16 (4) A 400 V AC






PRODUCT FEATURES

- Double lifting contact system
- Contact distance > 3 mm
- Actuator can be approached from all directions
- Normally open-, Normally closed- and combined (changeover) version

ON REQUEST

- Customized versions
- G-conform according IEC 60335-1:2001 chap. 30 UL 94 V-0


| | |
|--|---|
| Mechanical life endurance | 10E4 |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 |
| Ambient temperature | -40 °C ... +85 °C |
| Flammability | UL 94 V-0 |
| Glow wire test temperature | 850 °C |
| Material | actuator housing terminals |
| | PA glass fiber-reinforced PA glass ball reinforced , black, ultrasonic welded silver plated |
| Contact material | Ag |
| Contact distance | > 3 mm < 3 mm |
| Approval marks |  /  (product-dependend) /  |
| Suitable for appliances of protection class II under compliance with the installation conditions required on the equipment side | |



SERIES 1115 - SINGLE-POLE PUSHBUTTON SWITCHES

TO 16 (4) A 400 V AC

| | 16 (4) A 400 V AC 1E4 | 16 (2) A 380 V AC 1E4 | 12 A 125 V AC 1/6 HP | 6 A 250 V AC 1/6 HP | Terminal type | Terminal description | Contact distance (mm) | Operating force (N) | Operating position (OP) (mm) | Difference travel max. (mm) | Free position (FP) max. (mm) | Permissible total travel position (TP) (mm) | Stock version |
|---|-----------------------|-----------------------|----------------------|---------------------|---------------|----------------------|-----------------------|---------------------|------------------------------|-----------------------------|------------------------------|---|---------------|
| Normally closed contact (SPNC) | | | | | | | | | | | | | |
| 1115.2101 | ○ | | ○ | ○ | | 6.3 | > 3 | 6.0 ± 0.5 | | | 15 | 10.5 | ○ |
| Normally open contact (SPNO) | | | | | | | | | | | | | |
| 1115.4101 | ○ | | ○ | ○ | | 6.3 | > 3 | 6.0 ± 0.5 | 13.15 ± 0.35 | | 16.25 | 10.5 | ○ |
| Changeover switch (SPDT momentary) | | | | | | | | | | | | | |
| 1115.0101 | | ○ | | | | 6.3 | < 3 | 6.5 ± 1.0 | 13.5 ± 0.5 | | 15 | 10.5 | ○ |

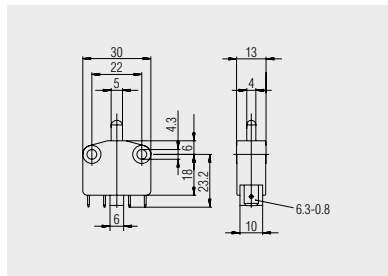

Quick-connect terminal 6.3 x 0.8

Basic type 1115

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH N'DRIVE

ORDER DAY AND NIGHT

In our web shop you can order more than
200 standard switches independent of time
and place:
24 hours per day, 7 days per week.

➤ www.marquardt-shop.com





MICRO-SIGNAL SWITCHES

| | |
|------------------------------|--|
| ROCKER SWITCHES | |
| PUSHBUTTON SWITCHES | |
| TOGGLE SWITCHES | |
| SLIDE SWITCHES | |
| ROTARY SWITCHES | |
| FOOT SWITCHES | |
| TACT AND KEY SWITCHES | |
| SNAP-ACTION SWITCHES | |
| MICRO-SIGNAL SWITCHES | |
| SENSORS | |
| ECO | |
| PUSH'N'DRIVE | |

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH'N'DRIVE



SERIES 1065

Micro-signal switches
to 100 mA 30 V DC

▶ PAGE
227 – 231



ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE



SERIES 1065 - MICRO-SIGNAL SWITCHES

TO 100 mA 30 V DC



PRODUCT FEATURES

- Redundant contact system for high switching reliability by double contacting
- Self-cleaning contact system due to wiping contacting
- Center-zero version (basic type 1075) for detecting 3 switching positions
- Noiseless switching system
- Large overtravel

ON REQUEST

- Other fastening pins
- Other lever forms
- Customized cable assembly
- Diagnosis capable versions






| | |
|---------------------------------------|--|
| Mechanical life endurance | 200E3 |
| Contact resistance (new condition) | < 500 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Protection type | IP 00 terminal side basic types 1065 and 1075 IP 67 actuator side all basic types, terminal side basic type 1068 |
| Ambient temperature | -40 °C ... +85 °C |
| Flammability | UL 94 HB |
| Material | actuator: POM / silicone rubber additional actuator: stainless steel spring steel housing: PBTP terminals: tinned |
| Contact material | AuCo |
| Shock resistance | 50 g |
| Miscellaneous | terminal side sealed electrical life endurance at 14 V DC 10 mA ≥ 200E3, at 30V DC 100 mA ≥ 40E3 |

ROCKERSWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SMP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH-IN DRIVE



SERIES 1065 - MICRO-SIGNAL SWITCHES

TO 100 mA 30 V DC

|  | ≤25 V DC | 100 mA 30 V DC 40E3 | Terminal type | Terminal description | Operating force (N) | Switching point NCC (mm) | Minimum OFF range (mm) | Switching point NOC (mm) | Rest position (FP) max. (mm) | Permissible end position (TP) (mm) | Actuator description | Lever drawing | Miscellaneous | Stock version |
|--|----------|---------------------|----------------------|----------------------|---------------------|--------------------------|------------------------|--------------------------|------------------------------|------------------------------------|---|---------------|---|---------------|
| Changeover switch (SPDT momentary) can be diagnosed | | | | | | | | | | | | | | |
| 1060.2601 | ○ | ⌋ | | | ≤ 1.6 | | | 8.95 ±0.3 | 10.15 | 6.85 | □ | | with resistor circuit pin right 2.5 long | |
| Normally open contact (SPNO) | | | | | | | | | | | | | | |
| 1068.0541 | ○ | ⌋ | 300 long 300 long | | ≤ 1.6 | | | 8.95 ±0.3 | 10.15 | 6.85 | □ | | pin right 5 long | |
| Changeover switch (SPDT momentary) | | | | | | | | | | | | | | |
| 1065.0503 | ○ | ⌋ | | | ≤ 1.6 | 9.45 ±0.3 | | 8.95 ±0.3 | 10.15 | 6.85 | □ | | pin both sides 5 long | |
| 1065.0603 | ○ | ⌋ | | | ≤ 1.6 | 9.45 ±0.3 | | 8.95 ±0.3 | 10.15 | 6.85 | □ | | pin both sides 2.5 long | |
| 1065.2000 | ○ | ⌋ | coded cranked | | ≤ 1.6 | 13.8 ±0.3 | | 13.3 ±0.3 | 14.5 | 11.2 | □ | | without pin | |
| 1065.3603 | ○ | ⌋ | | | ≤ 1.6 | 9.45 ±0.3 | | 8.95 ±0.3 | 10.15 | 6.85 | □ | | pin both sides 2.5 long | |
| 1065.3653 | ○ | ⌋ | | | ≤ 1.6 | 9.45 ±0.3 | | 8.95 ±0.3 | 10.15 | 6.85 | □ | | pin both sides 2.5 long | |
| 1065.5000 | ○ | ⌋ | | | ≤ 2.2 | 9.65 ±0.45 | | 9.15 ±0.45 | 11.35 | 7.35 |  | L02 | pin both sides 5 long | |
| 1065.5103 | ○ | ⌋ | | | ≤ 2.2 | 12.75 ±0.65 | | 12.05 ±0.65 | 14.7 | 9 |  | L21 | pin both sides 2.5 long | |
| 1065.5203 | ○ | ⌋ | | | ≤ 2.8 | 9.65 ±0.45 | | 9.15 ±0.45 | 11.35 | 7.35 |  | L31 | pin right 5 long | |
| 1065.7100 | ○ | ⌋ | coded cranked | | ≤ 2.2 | 17.1 ±0.65 | | 16.4 ±0.65 | 19.05 | 13.35 |  | L21 | without pin | |
| 1068.0503 | ○ | ⌋ | 300 long 300 long | | ≤ 1.6 | 9.45 ±0.3 | | 8.95 ±0.3 | 10.15 | 6.85 | □ | | pin both sides 5 long | |
| 1068.0601 | ○ | ⌋ | 300 long | | ≤ 1.6 | 9.45 ±0.3 | | 8.95 ±0.3 | 10.15 | 6.85 | □ | | pin right 2.5 long | |
| Changeover switch with OFF position in the center (SPDT momentary - Center OFF) | | | | | | | | | | | | | | |
| 1075.0603 | ○ | ⌋ | | | ≤ 1.6 | 9.45 ±0.3 | 8.3 - 9.15 | 8 ±0.3 | 10.15 | 6.85 | □ | | pin both sides 2.5 long | |
| 1075.2000 | ○ | ⌋ | coded cranked | | ≤ 1.6 | 13.8 ±0.3 | 12.65 - 13.5 | 12.35 ±0.3 | 14.5 | 11.2 | □ | | without pin | |
| 1075.3603 | ○ | ⌋ | | | ≤ 1.6 | 9.45 ±0.3 | 8.3 - 9.15 | 8 ±0.3 | 10.15 | 6.85 | □ | | pin right 2.5 long | |
| 1075.3653 | ○ | ⌋ | | | ≤ 1.6 | 9.45 ±0.3 | 8.3 - 9.15 | 8 ±0.3 | 10.15 | 6.85 | □ | | pin left 2.5 long | |

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE




SERIES 1065 - MICRO-SIGNAL SWITCHES


TO 100 mA 30 V DC




Basic type 1065

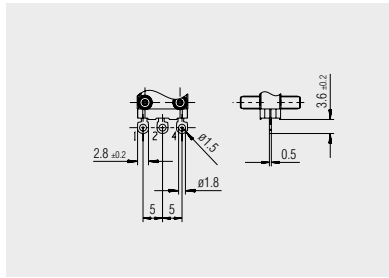


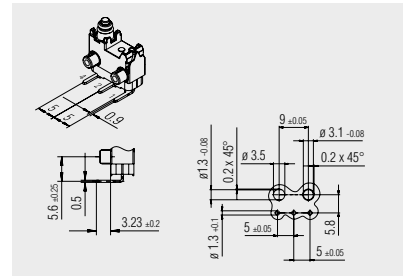
 Solder terminal

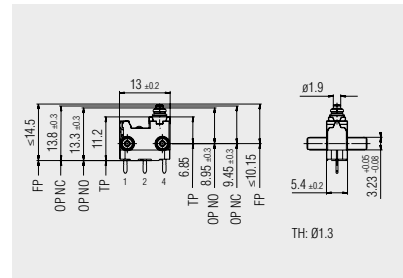


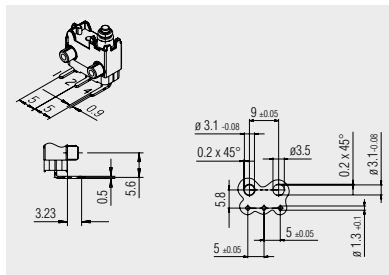
 PCB terminal

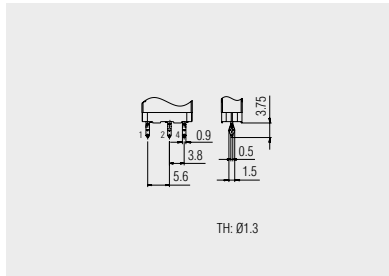


 PCB terminal coded and cranked




 PCB terminal left angled




 PCB terminal right angled



Basic type 1068



 Cable 300 long, tinned wire ends

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH N' DRIVE



SERIES 1065 - MICRO-SIGNAL SWITCHES

TO 100 mA 30 V DC

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES


SENSORS

ECO

PUSH'N'DRIVE



Basic type 1060/1070

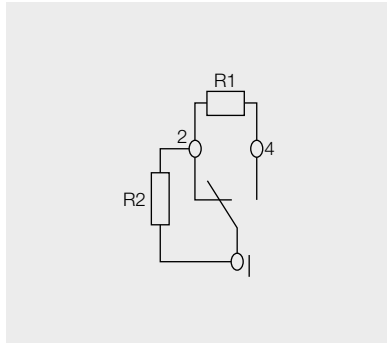


Switch diagnostics capability

Integrated resistors feature a circuit monitoring (short circuit, cable break, bad plug contacts)




Basic type 1075

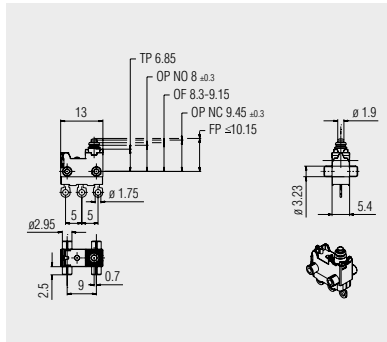


Due to the OFF range between the normally closed contact and the normally open contact increased in relation to basic type 1065 the switch can be used for determining three switching positions. As a result two conventional switches can be replaced by one of these new switch versions in many applications.




Auxiliary actuators

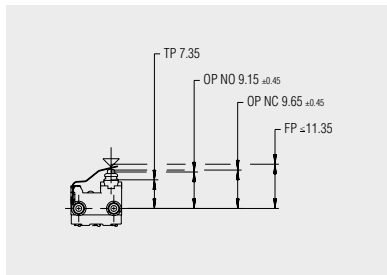


L01: straight lever

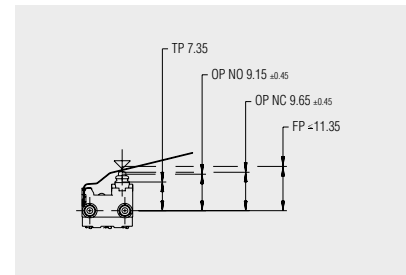

L02: straight lever

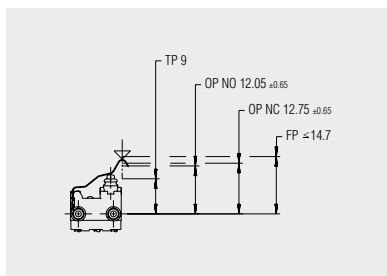

L21: simulated roller lever

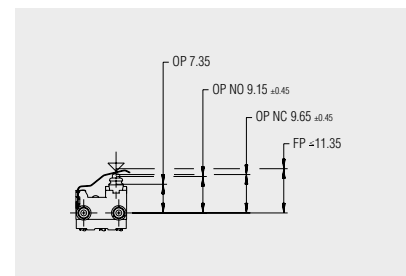

L31: differential levers




SERIES 1065 - MICRO-SIGNAL SWITCHES

TO 100 mA 30 V DC



Additional parts

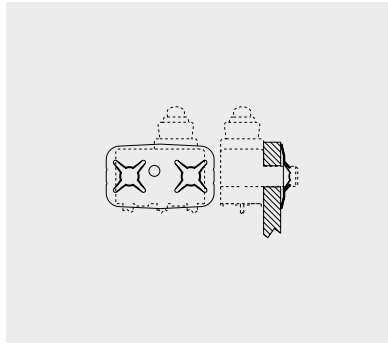

140.092.021

Fastening disc for the basic types 1065, 1068 and 1075

The fastening disc offers a fast, reliable fastening possibility in combination with switches with 5 mm long pins on plates or plastic parts with a wall thickness of up to 2.5 mm.

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH 'N' DRIVE





ORDER DAY AND NIGHT

In our web shop you can order more than
200 standard switches independent of time
and place:
24 hours per day, 7 days per week.

➤ www.marquardt-shop.com





| | | |
|-----------------------|--|-----------------------|
| ROCKER SWITCHES |  | ROCKER SWITCHES |
| PUSHBUTTON SWITCHES |  | PUSHBUTTON SWITCHES |
| TOGGLE SWITCHES |  | TOGGLE SWITCHES |
| SLIDE SWITCHES |  | SLIDE SWITCHES |
| ROTARY SWITCHES |  | ROTARY SWITCHES |
| FOOT SWITCHES |  | FOOT SWITCHES |
| TACT AND KEY SWITCHES |  | TACT AND KEY SWITCHES |
| SNAP-ACTION SWITCHES |  | SNAP-ACTION SWITCHES |
| MICRO-SIGNAL SWITCHES |  | MICRO-SIGNAL SWITCHES |
| SENSORS |  | SENSORS |
| ECO |  | ECO |
| PUSH'N'DRIVE |  | PUSH'N'DRIVE |



SERIES 2061

Flow sensors
for water volumes up to 15 l/min



▶ PAGE
235 – 236

SERIES 2066

Analogue pressure sensors
for water and air pressure measure-
ment up to 10 bar



▶ PAGE
237 – 239

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE



SERIES 2061 - FLOW SENSORS

FOR WATER VOLUMES UP TO 15 L/MIN





PRODUCT FEATURES

- Robust flywheel flow meter for water with electrical pulse output
- Wide measuring range with 2 - 15 l/min
- Scanning by magnetic field sensor
- Enables hot/cold, water and energy saving as well as quality improvement
- Excellent linearity
- EMC protected

ON REQUEST



- Hall or reed contact
- Optimized measuring ranges for different application areas
- Optional: different pulse/liter ratios
- Increased life endurance
- Spray water protection for electronics



| | |
|----------------------|---|
| Medium | water |
| Measuring range | 2 ... 15 l/min |
| Life endurance | 200 m ³ |
| Bursting pressure | 8 bar |
| Accuracy / tolerance | 2 ... 4 l/min ± 5%, 4 - 15 l/min ±3% |
| Material housing | POM |
| Ambient temperature | +5 °C ... +70 °C |
| Sensor description | pressure drop at 10 l/min: < 0.4 bar |
| Power supply | 3.8 ... 24 V DC (for Hall sensors variants) |
| Output current | 0 ... 20 mA |
| Output signal | 200 ± 3% pulses / liter |
| Pulse | min. pulse width 1 ms break ratio (Hall sensor) symmetrical |
| Approval marks |  /  |




SERIES 2061 - FLOW SENSORS

FOR WATER VOLUMES UP TO 15 L/MIN

| | Power supply | Terminal type | Terminal description | Miscellaneous | Stock version |
|-----------|--------------|---|----------------------|-------------------|---------------|
| 2061.1201 | 12 V DC |  | SNAP 2.5 hose nozzle | customer-specific | |
| 2061.1202 | 12 V DC |  | RAST 2.5 hose nozzle | | |

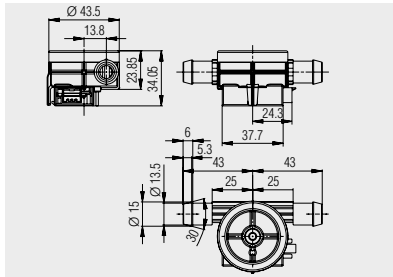

Basic type 2061

 Snap fastening SNAP 2.5 hose nozzle

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE



SERIES 2066 - ANALOGUE PRESSURE SENSORS

FOR WATER AND AIR PRESSURE MEASUREMENT UP TO 10 BAR



PRODUCT FEATURES

- Magnetic pressure sensor with analogue output
- Long life endurance
- Robust and simple structure
- Linear measuring range
- Fully automatic 100 % test and adjustment
- Versions can be used for drinking water

ON REQUEST


- Different measuring ranges
- Adaptation of the output voltage
- Supply voltage variants
- Integrated digital switching output
- Other electrical / mechanical adaptation

| | |
|---------------------|--|
| Medium | heating water air water |
| Measuring range | 0-4.5 bar / 0-65 psi / 0-450 kPa 0-10 bar / 0-145 psi / 0-1 MPa |
| Bursting pressure | > 9 bar / 130 psi / 0.9 MPa > 42 bar / 609 psi / 4.2 MPa (10 bar version) |
| Medium | +2 °C ... +90 °C |
| Storage | -40 °C ... +90 °C |
| Ambient temperature | -10 °C ... +70 °C |
| Sensor description | maximum current consumption < 14 mA (12 mA typ.) |



SERIES 2066 - ANALOGUE PRESSURE SENSORS

FOR WATER AND AIR PRESSURE MEASUREMENT UP TO 10 BAR

|  | Power supply | Terminal description | Measuring range | Output signal | Miscellaneous | Stock version |
|---|----------------------|---------------------------|----------------------------------|--|--|---------------|
| Pressure sensor | | | | | | |
| 2066.2102 | 5 V DC (ratiometric) | 4-pole with plug SNAP 2.5 | 0-4.5 bar / 0-65 psi / 0-450 kPa | proportional: 1.125 V at 0 bar, 3.6 V at 4.5 bar | plugging flange | |
| 2066.2103 | 5 V DC (ratiometric) | 4-pole with plug SNAP 2.5 | 0-4.5 bar / 0-65 psi / 0-450 kPa | proportional: 1.125 V at 0 bar, 3.6 V at 4.5 bar | thread flange / external thread G 3/8 | |
| 2066.2104 | 5 V DC (ratiometric) | 4-pole with plug SNAP 2.5 | 0-4.5 bar / 0-65 psi / 0-450 kPa | proportional: 0.5 V at 0 bar, 2.7 V at 4.5 bar | plugging flange | |
| 2066.2105 | 5 V DC (ratiometric) | 4-pole with plug SNAP 2.5 | 0-4.5 bar / 0-65 psi / 0-450 kPa | proportional: 0.5 V at 0 bar, 2.7 V at 4.5 bar | thread flange / external thread G 3/8 | |
| 2066.2106 | 6 - 30 V DC | 3-pole with plug SNAP 2.5 | 0-4.5 bar / 0-65 psi / 0-450 kPa | proportional: 0.5 V at 0 bar, 3.8 V at 4.5 bar | controlled voltage supply plugging flange | |
| 2066.2107 | 6 - 30 V DC | 3-pole with plug SNAP 2.5 | 0-4.5 bar / 0-65 psi / 0-450 kPa | proportional: 0.5 V at 0 bar, 3.8 V at 4.5 bar | controlled voltage supply thread flange / external thread G 3/8 | |
| 2066.2112 | 5 V DC (ratiometric) | 4-pole with plug SNAP 2.5 | 0-4.5 bar / 0-65 psi / 0-450 kPa | proportional: 1.125 V at 0 bar, 3.6 V at 4.5 bar | plugging flange | |
| 2066.3101 | 5 V DC (ratiometric) | 3-pole with plug SNAP 2.5 | 0-10 bar / 0-145 psi / 0-1 MPa | proportional: 0.5 V at 0 bar, 3.5 V at 10 bar | thread flange / external thread G 3/8 | |
| 2066.3102 | 5 V DC (ratiometric) | 3-pole with plug SNAP 2.5 | 0-10 bar / 0-145 psi / 0-1 MPa | proportional: 0.5 V at 0 bar, 3.5 V at 10 bar | plugging flange | |

Further information under

WWW.MARQUARDT-SWITCHES.COM

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE




SERIES 2066 - ANALOGUE PRESSURE SENSORS

FOR WATER AND AIR PRESSURE MEASUREMENT UP TO 10 BAR




Basic type 2066 (plugging flange)
4.5 bar version

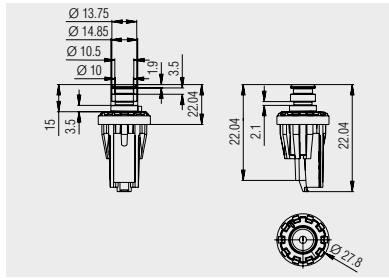

☐ Snap fastening 4-pole with
plug SNAP 2.5




Basic type 2066 (thread flange)
4.5 bar version

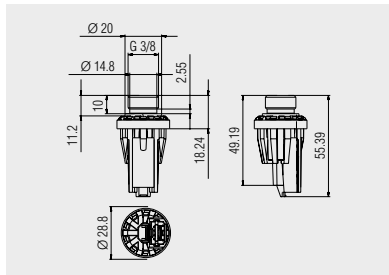

☐ Snap fastening 4-pole with
plug SNAP 2.5




Basic type 2066 (plugging flange)
10 bar version

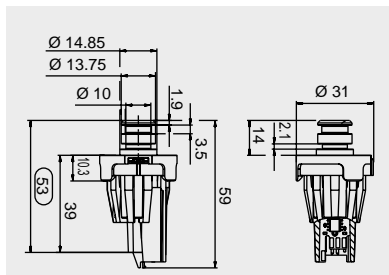

☐ Snap fastening 3-pole with
plug SNAP 2.5



Basic type 2066 (thread flange)
10 bar version

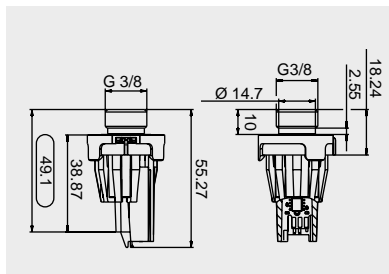

☐ Snap fastening 3-pole with
plug SNAP 2.5

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH N' DRIVE

ORDER DAY AND NIGHT

In our web shop you can order more than
200 standard switches independent of time
and place:
24 hours per day, 7 days per week.

➤ www.marquardt-shop.com





| | | |
|-----------------------|--|-----------------------|
| ROCKER SWITCHES | | ROCKER SWITCHES |
| PUSHBUTTON SWITCHES | | PUSHBUTTON SWITCHES |
| TOGGLE SWITCHES | | TOGGLE SWITCHES |
| SLIDE SWITCHES | | SLIDE SWITCHES |
| ROTARY SWITCHES | | ROTARY SWITCHES |
| FOOT SWITCHES | | FOOT SWITCHES |
| TACT AND KEY SWITCHES | | TACT AND KEY SWITCHES |
| SNAP-ACTION SWITCHES | | SNAP-ACTION SWITCHES |
| MICRO-SIGNAL SWITCHES | | MICRO-SIGNAL SWITCHES |
| SENSORS | | SENSORS |
| ECO | | ECO |
| PUSH'N'DRIVE | | PUSH'N'DRIVE |



SERIES 1550 ECO

Single-pole rocker switches
to 10 (4) A 250 V AC 1E4



▶ PAGE
243 – 245

SERIES 1086 ECO

Single-pole pushbutton switches
to 10 (3) A 250 V AC 1E4



▶ PAGE
246 – 247



SERIES 1550 ECO - SINGLE-POLE ROCKER SWITCHES

TO 10 (4) A 250 V AC 1E4



PRODUCT FEATURES

- Automatic switching off with flexible timer
4s - 71 h (auto-off)
- Automatic switching off with signal from the end device (remote-off)
- 100 million times proven switching principle
- Symmetric actuation characteristic
- Compact, one piece solution
- High design variety
- Auto-off version with intelligent current detection
- Energy neutral through total single-pole galvanic separation - "Zero-Watt"
- Stable, automatic snap-in from the back

ON REQUEST

- Other colors
- Other printing variants
- Other shut off times
- Other lamp variants
- Other installation method
- Other terminal types
- Other trigger types
- Higher electrical rating

| | |
|---|---|
| Mechanical life endurance | 5E4 |
| Contact distance | ≥ 3 mm |
| Contact resistance (new condition) | < 100 mΩ (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MΩ (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 |
| Ambient temperature | terminal side -20 °C ... +85 °C actuating side -20 °C ... +55 °C |
| Flammability | UL 94 V-2 |
| Glow wire test temperature | 850 °C |
| Material actuator housing | PA PA |
| Plug force of the terminals | ≤ 80 N |
| Approval marks | |
| Suitable for appliances of protection class II | |

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

MICRO-SIGNAL SWITCHES

SNAP-ACTION SWITCHES

SENSORS



ECO


PUSH 'N' DRIVE




SERIES 1550 ECO - SINGLE-POLE ROCKER SWITCHES

TO 10 (4) A 250 V AC 1E4


| | Lighting voltage in V | Actuator color / printing | Housing color | Terminal type | Terminal description | Contact material | Miscellaneous | Stock version |
|---|-----------------------|---------------------------|---------------|---------------|----------------------|------------------------------|--|---------------|
|  single-pole  | | | | | | EN 60335 cap. 30 conform "G" | | |
| ON / OFF switch (SPST) | | | | | | | | |
| 1550.1940 | 230 | | | ○ | | 4.8 Ag ○ | auto-off-function auto-off time: t = 30 min. | |
| 1550.1942 | 230 | | | ○ | | 4.8 Ag ○ | auto-off-function auto-off time: t = 1h with current detection | |
| 1550.1943 | 230 | | | ○ | | 4.8 Ag ○ | auto-off-function auto-off time: t = 15 min. | |
| 1550.1944 | 230 | | | ○ | | 4.8 Ag ○ | auto-off-function auto-off time: t = 15 min. | |
| 1550.1950 | 230 | | | ○ | | 4.8 Ag ○ | remote-off function | |
| 1550.1902 | 230 | | ○ | | | 4.8 Ag ○ | standard switch without ECO function | ○ |
| 1551.1950 | | | | ○ | | 4.8 Ag ○ | remote-off function | |
| 1551.1902 | | | ○ | | | 4.8 Ag ○ | standard switch without ECO function | ○ |




Basic type 1550 ECO

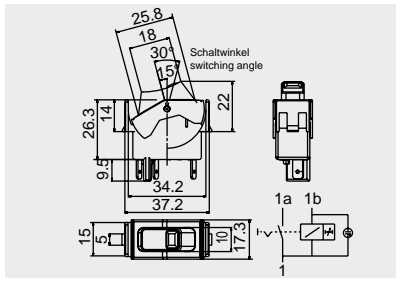


Quick-connect terminal 4.8 x 0.8
auto-off
auto-off with current detection

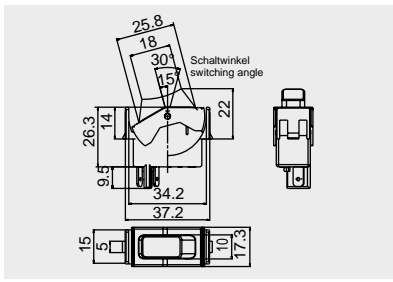

Quick-connect terminal 4.8 x 0.8
ON / OFF standard version

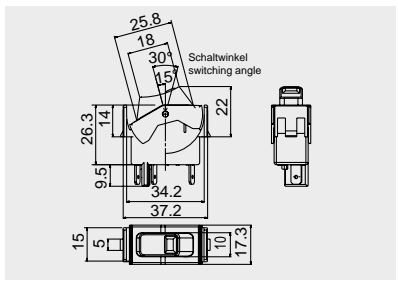

Quick-connect terminal 4.8 x 0.8
ON / OFF standard version
illuminated

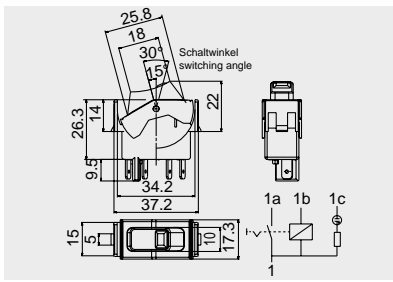

Quick-connect terminal 4.8 x 0.8
Remote-OFF




SERIES 1550 ECO - SINGLE-POLE ROCKER SWITCHES

TO 10 (4) A 250 V AC 1E4



Installation frame
217.xxx.xxx

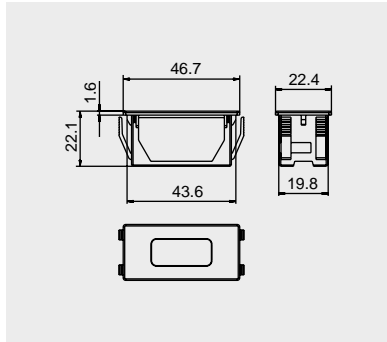

Installation frame with flange and latching from the front side



Holder clamp
on request




Holder clamp made of metal as installation alternative. Switch is delivered with attached clamps.



SERIES 1086 ECO - SINGLE-POLE PUSHBUTTON SWITCHES

TO 10 (3) A 250 V AC 1E4

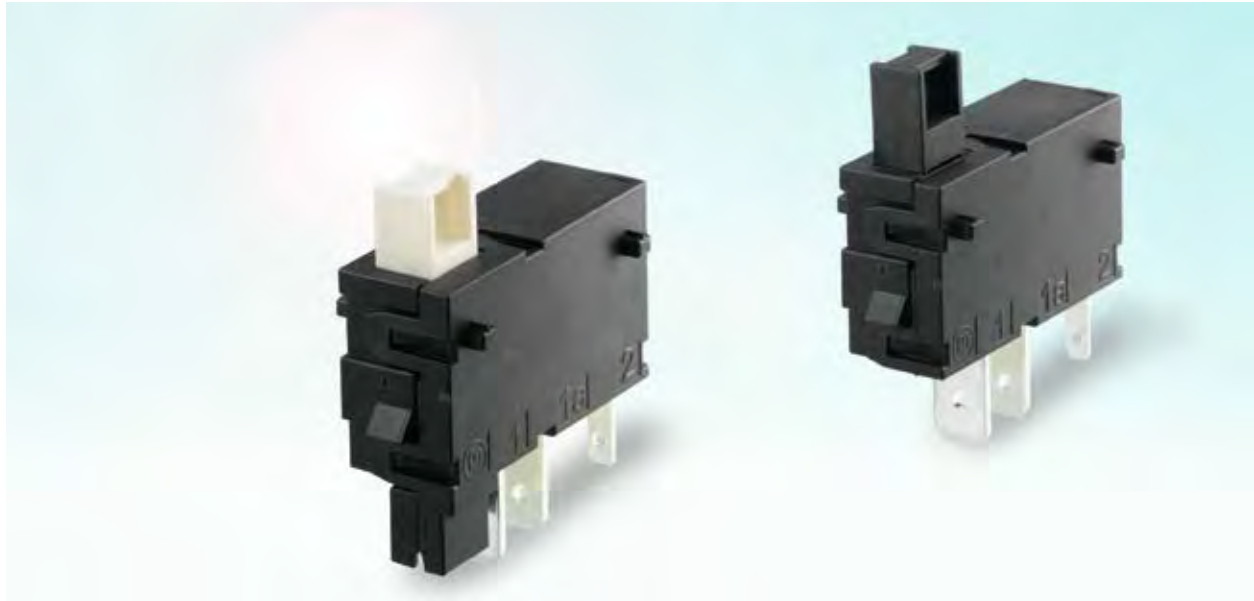

PRODUCT FEATURES

- Automatic switching off with signal from the end device (remote-off)
- Version with auxiliary contact for a delayed shut-off by the end device
- 100 million times proven 1080 snap-action switching system
- Compact, one piece solution
- Variable actuator design with holder
- Energy neutral through total single-pole galvanic separation - "Zero-Watt"

ON REQUEST



- Other terminal variants
- Customized actuators
- Cable assembly
- Higher electrical ratings


| | |
|--|---|
| Mechanical life endurance | 20E4 |
| Contact resistance (new condition) | < 100 mOhm (1 A 12 V DC) |
| Insulation resistance (new condition) | > 100 MOhm (500 V DC) |
| Proof tracking | 250 PTI |
| Protection type | IP 40 |
| Ambient temperature | -40 °C ... +85 °C |
| Flammability | UL 94 V-0 |
| Glow wire test temperature | 850 °C |
| Material | actuator PA additional actuator stainless steel housing PA terminals silver plated |
| Approval marks | |
| Operating force | ≤ 2.5 N |




SERIES 1086 ECO - SINGLE-POLE PUSHBUTTON SWITCHES


TO 10 (3) A 250 V AC 1E4


|  single-pole | 10 (3) A 250 V AC 1E4 | Terminal type | Terminal description | Contact distance (mm) | Contact material | Operating force (N) | Free position (FP) max. (mm) | Operating position (OP) (mm) | Permissible total travel position (mm) | EN 60335 cap. 30 conform „G“ | Miscellaneous | Stock version |
|--|-----------------------|---|-------------------------|-----------------------|------------------|---------------------|------------------------------|------------------------------|--|------------------------------|-------------------------------------|---------------|
| ON / OFF switch (SPST) | | | | | | | | | | | | |
| 1086.3101 | ○ |  | 2.8 x 0.5 4.8 6.3 | > 3 | Ag | ≤ 2.5 | 23.2 | 20.6 ± 0.5 | 18.8 | ○ | | |
| 1086.3201 | ○ | | 2.8 x 0.5 4.8 6.3 | > 3 | Ag | ≤ 2.5 | 23.2 | 20.6 ± 0.5 | 18.8 | ○ | Remote-off with auxiliary contactor | |




Basic type 1086

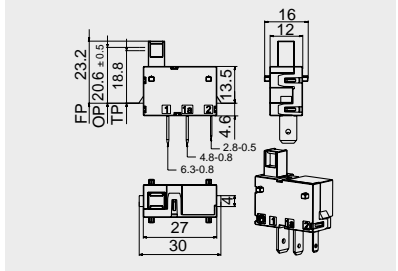

 Quick-connect terminal
2.8 x 0.5, 4.8 x 0.8, 6.3 x 0.8
1086.3101

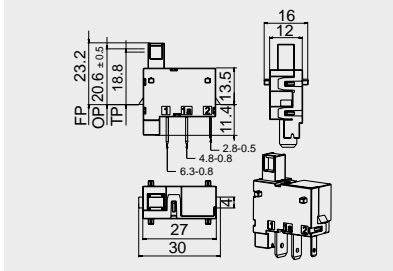

 Quick-connect terminal
2.8 x 0.5, 4.8 x 0.8, 6.3 x 0.8
Socket (2.0 mm) for auxiliary contact
1086.3201

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
PUSH N' DRIVE

ORDER DAY AND NIGHT

In our web shop you can order more than
200 standard switches independent of time
and place:
24 hours per day, 7 days per week.

➤ www.marquardt-shop.com





| | | |
|-----------------------|--|-----------------------|
| ROCKER SWITCHES | | ROCKER SWITCHES |
| PUSHBUTTON SWITCHES | | PUSHBUTTON SWITCHES |
| TOGGLE SWITCHES | | TOGGLE SWITCHES |
| SLIDE SWITCHES | | SLIDE SWITCHES |
| ROTARY SWITCHES | | ROTARY SWITCHES |
| FOOT SWITCHES | | FOOT SWITCHES |
| TACT AND KEY SWITCHES | | TACT AND KEY SWITCHES |
| SNAP-ACTION SWITCHES | | SNAP-ACTION SWITCHES |
| MICRO-SIGNAL SWITCHES | | MICRO-SIGNAL SWITCHES |
| SENSORS | | SENSORS |
| ECO | | ECO |
| PUSH'N'DRIVE | | PUSH'N'DRIVE |



SERIES 3450

Push'n'Drive Keyless-Go-System
Universal Keyless-Go-System for
Off-Road Vehicles



▶ PAGE
251 – 252

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE



SERIES 3450 – PUSH'N'DRIVE KEYLESS-GO-SYSTEM

UNIVERSAL KEYLESS-GO-SYSTEM FOR OFF-ROAD VEHICLES



PRODUCT FEATURES

- Keyless start of vehicles (keyless) – Push'n'Drive
- Generally available off-the-shelf system
System outputs configurable over CAN-Bus
- Simple adaption with hardwired outputs
- Push'n'Drive using HITAG2 encryption for information exchange between key and ECU
- Simple integration with no additional tooling and development costs
- Good price-performance ratio
- Proven Marquardt technology with numerous premium car companies

ON REQUEST

- With keyless-entry-function
- 24 V-version
- Customer specific key fob
- Solution for fleet management
- Remote keyless-entry-function

| | |
|---------------------------|--|
| Operating voltage | 8 – 16 V DC |
| Sleep current | < 100 µA |
| Operating temperature | -40 °C ... +85 °C |
| Frequencies | LF 21.85 KHz (ECU to key) RF 433.92 MHz (key to ECU) |
| Mechanical life endurance | MTBF 15 years; Key battery life: 5 years (battery changeable) |
| Mating connector ECU | Tyco 638518–5 sealed 12 pins |
| Range | Adjustable up to 4 meters |
| Interfaces | CAN |
| Security | HITAG 2 |
| Outputs | High-side Driver 0.4 A continuous 2 Relays (NO and NC): - 25 A max. carrying current for 10 minutes - 30 A max. switching current |
| Inputs | CAN – 2 Wire Hardwire – Momentary switch (start/stop input) |
| Package | Standard Optional |
| | 1 ECU, 2 keys Start/Stop button, connector for ECU |
| Protection Type | IP 65 and IP 67 |

ROCKER SWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 MICRO-SIGNAL SWITCHES
 SMP-ACTION SWITCHES
 SENSORS
 ECO
 PUSH'N'DRIVE




SERIES 3450 – PUSH'N'DRIVE KEYLESS-GO-SYSTEM

UNIVERSAL KEYLESS-GO-SYSTEM FOR OFF-ROAD VEHICLES


Example system operation:

1. Start/Stop button gets pressed, system wakes up.
2. ECU sends location field to search key.
3. Key picks up field strength.
4. Key sends strength to ECU.
5. ECU compares strength with a predefined threshold.
6. ECU enables functionality when key is in range.



- If valid key is not in range, ECU will search two more times before going back to sleep mode.
- Start/Stop button gets pressed second time, all outputs turn off, ECU goes to sleep mode.

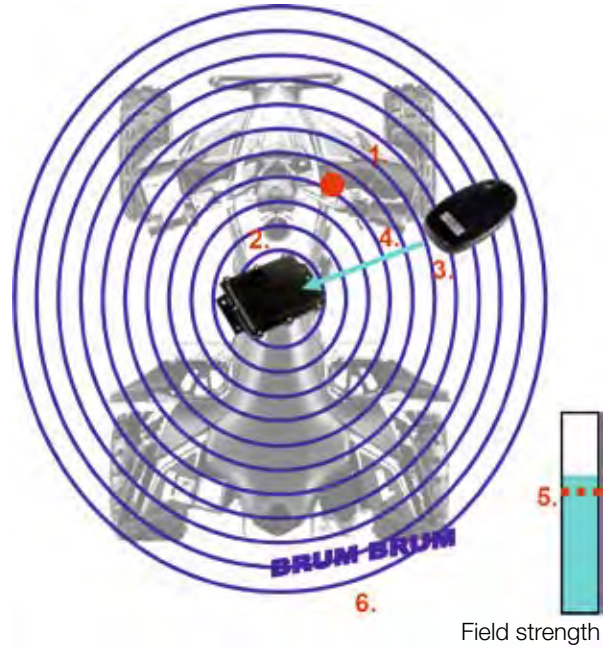

Circuit

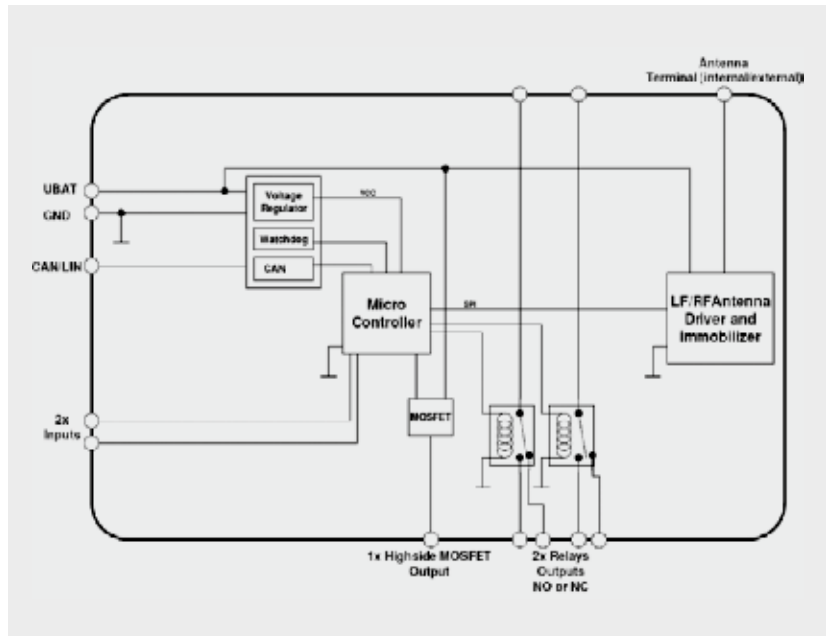

Drawings
(dimensions in mm)

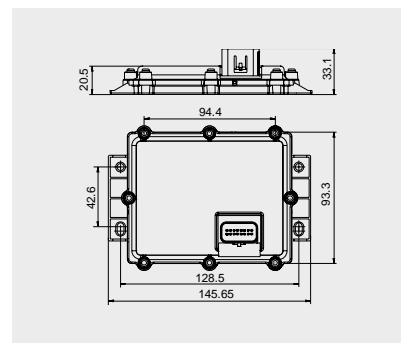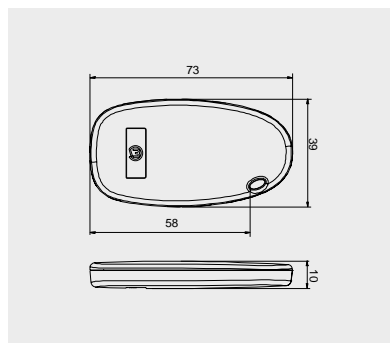

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'N'DRIVE



INDEX OF PART NUMBERS

PART NUMBERS

| Part number | Stock version | PU / Piece* | Page |
|-------------|---------------|-------------|------|
| 0100.1201 | • | 250 | 139 |
| 0100.2901 | • | 250 | 139 |
| 0344.0102 | | | 94 |
| 0344.0201 | | | 94 |
| 0350.0101 | • | 50 | 131 |
| 0350.2101 | | | 131 |
| 1004.0402 | • | 500 | 204 |
| 1004.0509 | | | 203 |
| 1004.1002 | • | 400 | 204 |
| 1004.4601 | | | 204 |
| 1005.0101 | • | 400 | 203 |
| 1005.0401 | • | 500 | 203 |
| 1005.0404 | • | 500 | 202 |
| 1005.0507 | | | 203 |
| 1005.0904 | | | 202 |
| 1005.1001 | • | 500 | 203 |
| 1005.1004 | • | 400 | 202 |
| 1005.1010 | | | 203 |
| 1005.1101 | • | 400 | 202 |
| 1005.1105 | • | 400 | 202 |
| 1005.1201 | | | 202 |
| 1005.1204 | • | 400 | 202 |
| 1005.1207 | • | 400 | 202 |
| 1005.1226 | | | 202 |
| 1005.2505 | | | 202 |
| 1005.2809 | | | 202 |
| 1005.3501 | | | 203 |
| 1005.4001 | | | 202 |
| 1006.0701 | • | 400 | 203 |
| 1006.0901 | • | 200 | 203 |
| 1006.1011 | | | 203 |
| 1006.1101 | | | 203 |
| 1006.1201 | • | 400 | 203 |
| 1006.1301 | • | 250 | 203 |
| 1006.1401 | • | 200 | 203 |
| 1006.1511 | • | 200 | 204 |
| 1006.1514 | | | 203 |
| 1006.1801 | | | 204 |
| 1006.3402 | | | 202 |
| 1006.4103 | | | 204 |
| 1006.4203 | | | 204 |
| 1010.0101 | • | 500 | 212 |
| 1010.0304 | | | 212 |
| 1010.2003 | | | 212 |
| 1010.3001 | | | 212 |
| 1010.4103 | • | 500 | 212 |
| 1010.4402 | | | 212 |
| 1010.6002 | • | 270 | 212 |
| 1010.6003 | • | 270 | 212 |
| 1010.7102 | | | 212 |
| 1010.7172 | | | 212 |
| 1010.7352 | | | 212 |
| 1010.7401 | | | 212 |
| 1010.7402 | | | 212 |
| 1010.7601 | | | 212 |
| 1010.8102 | | | 212 |
| 1010.9705 | | | 212 |
| 1010.9752 | | | 212 |
| 1010.9802 | | | 212 |
| 1010.9852 | • | 400 | 212 |
| 1014.6151 | | | 212 |
| 1017.0153 | | | 212 |
| 1017.0801 | • | 250 | 212 |

| Part number | Stock version | PU / Piece* | Page |
|-------------|---------------|-------------|------|
| 1017.0851 | | | 212 |
| 1017.5701 | | | 212 |
| 1019.0101 | | | 216 |
| 1019.0201 | | | 216 |
| 1019.0301 | | | 216 |
| 1019.2101 | • | 200 | 216 |
| 1019.3101 | | | 216 |
| 1019.5101 | • | 400 | 216 |
| 1019.5401 | | | 216 |
| 1019.5501 | | | 216 |
| 1019.5601 | • | 400 | 216 |
| 1022.0101 | | | 219 |
| 1022.2201 | | | 219 |
| 1022.4501 | • | 200 | 219 |
| 1022.4502 | | | 219 |
| 1040.0111 | • | 250 | 210 |
| 1040.0114 | • | 250 | 210 |
| 1040.0301 | | | 210 |
| 1045.0102 | • | 1000 | 190 |
| 1045.0122 | | | 190 |
| 1045.0142 | | | 190 |
| 1045.0151 | • | 1000 | 190 |
| 1045.0903 | • | 1000 | 190 |
| 1045.1103 | • | 1000 | 190 |
| 1045.1151 | • | 1000 | 190 |
| 1045.1943 | | | 190 |
| 1045.2101 | | | 190 |
| 1045.2251 | • | 1000 | 190 |
| 1045.2702 | • | 1000 | 190 |
| 1045.3102 | • | 1000 | 190 |
| 1045.3151 | • | 1000 | 191 |
| 1045.4102 | • | 1000 | 191 |
| 1045.4151 | • | 1000 | 191 |
| 1045.5102 | • | 1000 | 191 |
| 1045.5112 | • | 1000 | 191 |
| 1045.5502 | • | 1000 | 191 |
| 1045.5512 | • | 1000 | 191 |
| 1045.6102 | • | 1000 | 191 |
| 1045.6502 | • | 1000 | 191 |
| 1045.7102 | • | 1000 | 191 |
| 1045.7502 | • | 1000 | 191 |
| 1046.0104 | • | 1000 | 191 |
| 1046.1103 | • | 1000 | 191 |
| 1046.2904 | • | 1000 | 191 |
| 1048.0151 | • | 1000 | 191 |
| 1048.1102 | • | 1000 | 192 |
| 1048.1132 | • | 1000 | 190 |
| 1048.2151 | • | 1000 | 192 |
| 1048.6113 | • | 1000 | 192 |
| 1050.0102 | • | 500 | 184 |
| 1050.0103 | • | 500 | 184 |
| 1050.0122 | • | 500 | 184 |
| 1050.0151 | • | 500 | 184 |
| 1050.0202 | • | 500 | 184 |
| 1050.0802 | | | 184 |
| 1050.1102 | • | 500 | 184 |
| 1050.1122 | • | 500 | 184 |
| 1050.1142 | | | 184 |
| 1050.1151 | • | 500 | 184 |
| 1050.1202 | • | 500 | 184 |
| 1050.1426 | | | 184 |
| 1050.2102 | • | 500 | 184 |
| 1050.2122 | | | 184 |

| Part number | Stock version | PU / Piece* | Page |
|-------------|---------------|-------------|------|
| 1050.2151 | • | 500 | 184 |
| 1050.2202 | • | 500 | 184 |
| 1050.2403 | | | 184 |
| 1050.3102 | • | 500 | 184 |
| 1050.4102 | • | 500 | 184 |
| 1050.5202 | • | 400 | 184 |
| 1050.5251 | | | 184 |
| 1050.5305 | • | 400 | 184 |
| 1050.5702 | • | 400 | 184 |
| 1050.6702 | • | 400 | 184 |
| 1050.7202 | • | 400 | 184 |
| 1050.7702 | | | 184 |
| 1055.0351 | • | 1500 | 179 |
| 1055.0552 | | | 179 |
| 1055.2061 | | | 179 |
| 1055.2351 | | | 179 |
| 1055.3653 | | | 179 |
| 1055.3654 | | | 179 |
| 1055.5155 | | | 179 |
| 1055.5350 | | | 179 |
| 1055.8155 | | | 179 |
| 1056.0351 | | | 179 |
| 1056.2351 | | | 179 |
| 1056.3060 | | | 179 |
| 1056.3065 | | | 179 |
| 1056.3351 | | | 179 |
| 1056.3352 | | | 179 |
| 1058.0351 | • | 500 | 179 |
| 1058.0373 | | | 179 |
| 1058.0395 | | | 179 |
| 1058.0553 | | | 179 |
| 1058.0593 | | | 179 |
| 1058.0653 | • | 500 | 179 |
| 1058.5253 | | | 179 |
| 1060.2601 | | | 228 |
| 1065.0503 | | | 228 |
| 1065.0603 | | | 228 |
| 1065.2000 | | | 228 |
| 1065.3603 | | | 228 |
| 1065.3653 | | | 228 |
| 1065.5000 | | | 228 |
| 1065.5103 | | | 228 |
| 1065.5203 | | | 228 |
| 1065.7100 | | | 228 |
| 1068.0503 | | | 228 |
| 1068.0541 | | | 228 |
| 1068.0601 | | | 228 |
| 1075.0603 | | | 228 |
| 1075.2000 | | | 228 |
| 1075.3603 | | | 228 |
| 1075.3653 | | | 228 |
| 1080.0103 | | | 198 |
| 1080.0203 | | | 198 |
| 1080.0304 | | | 198 |
| 1080.0403 | • | 400 | 198 |
| 1080.0440 | | | 198 |
| 1080.0464 | | | 198 |
| 1080.0539 | | | 198 |
| 1080.0585 | | | 198 |
| 1080.0903 | | | 198 |
| 1080.5906 | | | 198 |
| 1085.0103 | | | 198 |
| 1085.0342 | | | 198 |

* Minimum packaging units

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SWAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH IN DRIVE



INDEX OF PART NUMBERS

PART NUMBERS

| Part number | Stock version | PU / Piece* | Page |
|-------------|---------------|-------------|------|
| 1085.0375 | | | 198 |
| 1085.0403 | • | 400 | 198 |
| 1086.3101 | | | 247 |
| 1086.3201 | | | 247 |
| 1115.0101 | • | 200 | 223 |
| 1115.2101 | • | 200 | 223 |
| 1115.4101 | • | 200 | 223 |
| 1117.0106 | • | 500 | 221 |
| 1117.0206 | • | 500 | 221 |
| 1206.0201 | | | 147 |
| 1206.2503 | | | 147 |
| 1247.0102 | | | 111 |
| 1247.0301 | | | 111 |
| 1247.2102 | | | 111 |
| 1247.2301 | | | 111 |
| 1550.1902 | • | 120 | 244 |
| 1550.1940 | | | 244 |
| 1550.1942 | | | 244 |
| 1550.1943 | | | 244 |
| 1550.1944 | | | 244 |
| 1550.1950 | | | 244 |
| 1550.3102 | | | 51 |
| 1550.3609 | | | 51 |
| 1551.1303 | | | 51 |
| 1551.1902 | • | 120 | 244 |
| 1551.1950 | | | 244 |
| 1551.2654 | | | 51 |
| 1551.3102 | • | 100 | 51 |
| 1551.3103 | | | 51 |
| 1551.3106 | | | 51 |
| 1551.3202 | • | 100 | 51 |
| 1551.3702 | | | 51 |
| 1552.0102 | • | 100 | 52 |
| 1552.2601 | | | 52 |
| 1552.2602 | • | 100 | 52 |
| 1552.3102 | • | 100 | 52 |
| 1552.3104 | | | 52 |
| 1552.3112 | • | 100 | 52 |
| 1552.3117 | | | 52 |
| 1552.3602 | • | 100 | 52 |
| 1552.4602 | • | 100 | 52 |
| 1552.4702 | | | 52 |
| 1552.4802 | | | 52 |
| 1555.3102 | • | 200 | 52 |
| 1555.3104 | • | 200 | 52 |
| 1555.3108 | • | 200 | 52 |
| 1555.3109 | | | 52 |
| 1555.3111 | | | 52 |
| 1555.3120 | | | 52 |
| 1555.3125 | | | 52 |
| 1555.3604 | | | 52 |
| 1555.4608 | | | 52 |
| 1555.8104 | | | 52 |
| 1581.1303 | | | 51 |
| 1656.1703 | | | 76 |
| 1656.1723 | | | 76 |
| 1660.0201 | • | 100 | 121 |
| 1660.0202 | • | 100 | 121 |
| 1660.0222 | | | 121 |
| 1660.3202 | | | 121 |
| 1661.0101 | • | 100 | 121 |
| 1661.0220 | | | 121 |
| 1662.0101 | • | 100 | 121 |

| Part number | Stock version | PU / Piece* | Page |
|-------------|---------------|-------------|------|
| 1662.0201 | | | 121 |
| 1663.0101 | • | 100 | 121 |
| 1664.0101 | | | 121 |
| 1665.3102 | | | 121 |
| 1670.5201 | | | 125 |
| 1670.5202 | • | 100 | 125 |
| 1670.5203 | | | 125 |
| 1670.5204 | | | 125 |
| 1671.5101 | | | 125 |
| 1671.5201 | | | 125 |
| 1671.5203 | | | 125 |
| 1672.5101 | | | 125 |
| 1673.5501 | | | 125 |
| 1675.5315 | | | 125 |
| 1681.1101 | • | 1000 | 99 |
| 1681.1354 | | | 99 |
| 1681.1702 | | | 99 |
| 1681.2102 | | | 99 |
| 1681.3101 | | | 99 |
| 1681.3104 | | | 99 |
| 1681.3501 | | | 99 |
| 1681.3701 | | | 99 |
| 1681.4402 | | | 99 |
| 1681.4403 | | | 99 |
| 1681.4431 | | | 99 |
| 1681.4701 | | | 99 |
| 1681.5701 | | | 99 |
| 1681.9408 | | | 99 |
| 1682.1101 | | | 100 |
| 1682.1201 | | | 100 |
| 1682.1702 | | | 100 |
| 1682.1902 | | | 100 |
| 1682.2701 | | | 100 |
| 1682.3101 | | | 100 |
| 1682.3201 | | | 100 |
| 1682.3702 | | | 100 |
| 1682.6101 | | | 100 |
| 1682.6401 | | | 100 |
| 1682.7704 | | | 100 |
| 1683.1101 | | | 106 |
| 1683.1201 | • | 250 | 106 |
| 1683.1802 | | | 106 |
| 1683.8101 | | | 106 |
| 1684.1101 | | | 106 |
| 1684.1701 | | | 106 |
| 1684.1801 | | | 106 |
| 1684.8202 | | | 106 |
| 1686.1101 | | | 106 |
| 1686.6155 | | | 106 |
| 1686.8104 | | | 106 |
| 1687.1104 | • | 250 | 106 |
| 1689.3803 | | | 100 |
| 1689.4202 | | | 100 |
| 1691.2101 | | | 109 |
| 1691.3201 | | | 109 |
| 1703.3201 | | | 152 |
| 1703.4001 | | | 152 |
| 1703.4101 | | | 152 |
| 1800.0102 | | | 22 |
| 1800.0108 | | | 22 |
| 1800.1102 | • | 500 | 22 |
| 1800.1104 | | | 22 |
| 1800.1108 | • | 500 | 22 |

| Part number | Stock version | PU / Piece* | Page |
|-------------|---------------|-------------|------|
| 1801.1101 | • | 500 | 22 |
| 1801.1102 | • | 500 | 22 |
| 1801.1119 | • | 500 | 22 |
| 1801.1121 | • | 500 | 22 |
| 1801.1146 | • | 500 | 23 |
| 1801.1148 | | | 22 |
| 1801.1151 | | | 23 |
| 1801.1202 | • | 500 | 24 |
| 1801.1302 | | | 23 |
| 1801.1303 | | | 23 |
| 1801.1403 | • | 400 | 23 |
| 1801.1520 | | | 22 |
| 1801.1908 | • | 500 | 22 |
| 1801.1926 | | | 22 |
| 1801.2106 | • | 500 | 23 |
| 1801.2202 | | | 24 |
| 1801.2402 | | | 23 |
| 1801.2702 | | | 23 |
| 1801.5102 | • | 150 | 23 |
| 1801.6101 | • | 500 | 23 |
| 1801.6102 | • | 500 | 23 |
| 1801.6115 | • | 500 | 23 |
| 1801.6122 | • | 500 | 22 |
| 1801.6130 | | | 22 |
| 1801.6222 | • | 500 | 23 |
| 1802.1101 | • | 250 | 26 |
| 1802.1102 | • | 250 | 26 |
| 1802.1108 | • | 250 | 26 |
| 1802.1121 | • | 250 | 26 |
| 1802.1123 | • | 250 | 26 |
| 1802.1221 | • | 250 | 27 |
| 1802.2102 | • | 250 | 27 |
| 1802.2104 | • | 250 | 27 |
| 1802.2504 | | | 26 |
| 1802.3102 | • | 250 | 27 |
| 1802.3311 | | | 26 |
| 1802.5103 | • | 200 | 27 |
| 1802.6123 | • | 500 | 26 |
| 1802.6152 | | | 27 |
| 1803.1102 | • | 500 | 24 |
| 1803.1121 | | | 24 |
| 1803.1202 | • | 500 | 25 |
| 1803.1252 | | | 25 |
| 1803.2102 | • | 500 | 24 |
| 1803.5102 | | | 24 |
| 1803.6102 | • | 500 | 24 |
| 1803.6152 | | | 24 |
| 1803.6222 | • | 500 | 25 |
| 1804.1102 | • | 250 | 27 |
| 1804.1125 | | | 27 |
| 1804.1225 | | | 28 |
| 1804.2102 | • | 250 | 27 |
| 1804.6121 | • | 250 | 27 |
| 1805.6102 | | | 26 |
| 1805.6108 | | | 26 |
| 1805.7104 | • | 250 | 26 |
| 1805.7109 | • | 250 | 26 |
| 1805.7110 | • | 250 | 26 |
| 1805.7112 | | | 26 |
| 1805.7118 | • | 500 | 26 |
| 1806.1102 | • | 250 | 29 |
| 1806.1602 | | | 29 |
| 1806.6108 | | | 29 |

* Minimum packaging units



INDEX OF PART NUMBERS

PART NUMBERS

| Part number | Stock version | PU / Piece* | Page |
|-------------|---------------|-------------|------|
| 1808.1101 | | | 24 |
| 1808.1102 | • | 500 | 24 |
| 1808.1103 | • | 500 | 24 |
| 1808.1112 | | | 24 |
| 1808.1152 | | | 25 |
| 1808.1202 | • | 500 | 24 |
| 1808.1302 | • | 500 | 25 |
| 1808.1353 | | | 25 |
| 1808.2102 | • | 500 | 25 |
| 1808.2302 | • | 500 | 25 |
| 1808.2704 | | | 25 |
| 1808.6102 | • | 500 | 25 |
| 1808.6103 | • | 500 | 25 |
| 1808.6202 | | | 25 |
| 1808.6302 | • | 500 | 25 |
| 1809.1102 | • | 250 | 27 |
| 1809.1202 | | | 27 |
| 1809.1302 | • | 250 | 28 |
| 1809.2102 | | | 28 |
| 1811.1102 | • | 400 | 133 |
| 1811.1202 | | | 133 |
| 1812.1102 | | | 133 |
| 1813.1102 | • | 400 | 133 |
| 1814.2102 | | | 133 |
| 1818.1102 | • | 400 | 133 |
| 1818.1202 | • | 400 | 133 |
| 1818.1302 | • | 400 | 133 |
| 1818.2302 | | | 133 |
| 1819.1102 | | | 133 |
| 1819.1302 | • | 200 | 133 |
| 1821.1101 | • | 250 | 136 |
| 1821.6101 | • | 250 | 136 |
| 1822.1101 | • | 125 | 136 |
| 1823.1101 | • | 250 | 136 |
| 1823.6101 | | | 136 |
| 1824.1101 | • | 125 | 136 |
| 1828.1101 | • | 250 | 136 |
| 1828.1201 | | | 136 |
| 1828.1301 | • | 250 | 136 |
| 1829.1101 | | | 136 |
| 1829.1301 | | | 136 |
| 1830.0102 | | | 57 |
| 1830.3112 | • | 200 | 57 |
| 1830.3118 | • | 200 | 57 |
| 1831.0114 | | | 57 |
| 1831.1107 | • | 200 | 57 |
| 1831.1202 | • | 200 | 58 |
| 1831.1253 | | | 58 |
| 1831.3311 | • | 200 | 57 |
| 1831.3312 | • | 200 | 57 |
| 1831.3313 | • | 200 | 57 |
| 1831.3402 | • | 200 | 58 |
| 1831.3606 | | | 57 |
| 1831.3607 | | | 57 |
| 1831.3815 | | | 57 |
| 1831.3816 | | | 57 |
| 1831.3933 | | | 57 |
| 1831.8112 | • | 200 | 57 |
| 1831.8202 | | | 58 |
| 1832.0113 | | | 61 |
| 1832.1102 | • | 100 | 61 |
| 1832.1612 | | | 60 |
| 1832.3307 | • | 100 | 61 |

| Part number | Stock version | PU / Piece* | Page |
|-------------|---------------|-------------|------|
| 1832.3311 | • | 100 | 60 |
| 1832.3312 | • | 100 | 60 |
| 1832.3313 | • | 100 | 60 |
| 1832.3407 | | | 61 |
| 1832.3602 | | | 61 |
| 1832.6112 | | | 61 |
| 1832.7103 | | | 61 |
| 1832.8112 | | | 61 |
| 1832.9101 | | | 61 |
| 1832.9103 | | | 61 |
| 1833.1102 | • | 200 | 58 |
| 1833.1202 | | | 59 |
| 1833.3307 | • | 200 | 58 |
| 1833.3312 | | | 58 |
| 1833.3402 | | | 59 |
| 1834.1102 | | | 62 |
| 1834.3302 | • | 100 | 62 |
| 1834.3309 | • | 100 | 62 |
| 1834.3311 | | | 61 |
| 1834.3312 | • | 100 | 61 |
| 1834.3402 | • | 100 | 63 |
| 1834.3603 | | | 62 |
| 1834.6103 | | | 62 |
| 1835.3102 | • | 150 | 60 |
| 1835.3105 | • | 150 | 60 |
| 1835.3107 | | | 60 |
| 1835.3108 | • | 150 | 60 |
| 1835.3111 | | | 60 |
| 1835.3112 | • | 150 | 60 |
| 1835.3114 | • | 150 | 60 |
| 1835.3116 | | | 60 |
| 1835.3118 | • | 150 | 60 |
| 1835.3419 | | | 60 |
| 1835.3802 | | | 61 |
| 1835.3902 | | | 59 |
| 1835.9413 | | | 60 |
| 1838.0305 | | | 58 |
| 1838.1402 | • | 250 | 58 |
| 1838.1502 | • | 250 | 58 |
| 1838.1509 | • | 250 | 58 |
| 1838.1602 | • | 250 | 58 |
| 1838.3402 | • | 250 | 59 |
| 1838.3502 | • | 250 | 59 |
| 1838.3901 | • | 200 | 58 |
| 1838.4307 | | | 59 |
| 1838.8302 | | | 59 |
| 1839.0105 | | | 63 |
| 1839.1402 | • | 150 | 62 |
| 1839.1407 | • | 150 | 62 |
| 1839.1410 | | | 62 |
| 1839.1502 | | | 62 |
| 1839.1507 | • | 150 | 62 |
| 1839.1509 | | | 62 |
| 1839.1518 | | | 62 |
| 1839.1602 | | | 62 |
| 1839.3352 | | | 63 |
| 1839.3402 | • | 150 | 63 |
| 1839.3502 | • | 150 | 63 |
| 1839.3503 | | | 63 |
| 1839.3512 | | | 62 |
| 1839.3602 | | | 63 |
| 1839.7304 | | | 63 |
| 1841.1101 | • | 250 | 117 |

| Part number | Stock version | PU / Piece* | Page |
|-------------|---------------|-------------|------|
| 1841.1201 | • | 250 | 117 |
| 1841.1301 | • | 250 | 117 |
| 1841.6101 | | | 117 |
| 1842.1101 | | | 117 |
| 1842.6101 | | | 117 |
| 1843.1101 | | | 117 |
| 1843.1201 | • | 250 | 117 |
| 1846.0201 | • | 500 | 115 |
| 1846.0204 | | | 115 |
| 1846.2201 | | | 115 |
| 1846.2251 | | | 115 |
| 1846.3201 | • | 400 | 115 |
| 1855.0102 | • | 400 | 43 |
| 1855.0108 | • | 400 | 43 |
| 1855.1102 | • | 400 | 43 |
| 1855.1104 | • | 400 | 43 |
| 1855.1108 | • | 400 | 43 |
| 1855.1115 | | | 43 |
| 1855.1118 | | | 43 |
| 1855.1122 | | | 43 |
| 1855.1124 | | | 43 |
| 1858.0103 | • | 300 | 46 |
| 1858.0104 | | | 46 |
| 1858.1102 | • | 300 | 46 |
| 1858.1103 | • | 800 | 46 |
| 1858.1104 | | | 46 |
| 1858.1105 | | | 46 |
| 1858.2202 | • | 300 | 46 |
| 1858.2204 | | | 46 |
| 1858.4202 | • | 200 | 46 |
| 1858.4205 | • | 200 | 46 |
| 1858.9202 | | | 46 |
| 1881.1103 | • | 500 | 39 |
| 1881.1104 | • | 500 | 39 |
| 1881.1105 | • | 500 | 39 |
| 1881.1106 | | | 39 |
| 1881.1108 | | | 39 |
| 1881.1109 | | | 39 |
| 1881.1111 | | | 39 |
| 1881.1112 | | | 39 |
| 1881.1209 | | | 39 |
| 1883.1105 | | | 39 |
| 1883.1106 | | | 39 |
| 1890.1104 | | | 37 |
| 1901.1102 | • | 300 | 19 |
| 1901.1103 | • | 300 | 19 |
| 1901.1106 | | | 19 |
| 1901.1152 | | | 19 |
| 1911.1102 | • | 300 | 19 |
| 1911.1104 | | | 19 |
| 1921.1101 | | | 19 |
| 1921.1102 | • | 300 | 19 |
| 1932.1113 | | | 71 |
| 1932.3112 | • | 100 | 71 |
| 1932.3113 | | | 71 |
| 1932.3114 | | | 72 |
| 1932.3116 | | | 72 |
| 1932.3118 | | | 72 |
| 1932.3130 | | | 72 |
| 1932.3131 | | | 72 |
| 1932.3132 | | | 72 |
| 1932.3136 | | | 72 |
| 1932.3137 | | | 72 |

* Minimum packaging units

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SWAMP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH-IN DRIVE



INDEX OF PART NUMBERS

LAMPS

| Part number | Stock version | PU / Piece* | Page |
|-------------|---------------|-------------|------|
| 1932.3312 | | | 72 |
| 1932.3314 | | | 72 |
| 1932.3412 | | | 72 |
| 1932.3413 | • | 100 | 72 |
| 1934.2114 | | | 73 |
| 1934.3112 | | | 73 |
| 1934.3114 | | | 73 |
| 1935.3112 | • | 100 | 71 |
| 1935.3113 | • | 100 | 71 |
| 1935.3114 | • | 100 | 71 |
| 1935.3118 | • | 100 | 71 |
| 1935.3119 | | | 71 |
| 1935.3128 | | | 71 |
| 1935.3129 | | | 71 |
| 1935.3131 | | | 71 |
| 1935.3134 | | | 71 |
| 1935.3135 | | | 71 |
| 1935.3137 | | | 71 |
| 1935.3138 | | | 71 |
| 1935.3218 | | | 72 |
| 1939.0454 | | | 73 |
| 1939.3119 | • | 100 | 73 |
| 1939.3125 | | | 73 |
| 1939.3312 | • | 100 | 73 |
| 1939.3314 | • | 100 | 73 |
| 1939.3318 | | | 73 |
| 1941.1102 | | | 49 |
| 1941.1103 | | | 49 |
| 1941.1105 | | | 49 |
| 1941.1203 | | | 49 |
| 2061.1202 | | | 236 |
| 2066.2102 | | | 238 |
| 2066.2103 | | | 238 |
| 2066.2104 | | | 238 |
| 2066.2105 | | | 238 |
| 2066.2106 | | | 238 |
| 2066.2107 | | | 238 |
| 2066.2112 | | | 238 |
| 2066.3101 | | | 238 |
| 2066.3102 | | | 238 |
| 2410.0101 | | | 156 |
| 2410.0301 | • | 10 | 156 |
| 2410.0401 | • | 10 | 156 |
| 2410.0501 | • | 10 | 156 |
| 2410.1001 | • | 10 | 156 |
| 2420.0101 | • | 12 | 159 |
| 2420.0102 | • | 12 | 159 |
| 2420.0301 | • | 12 | 159 |
| 2420.0501 | • | 12 | 159 |
| 2420.4101 | • | 6 | 159 |
| 2420.5201 | | | 159 |
| 3000.0452 | | | 173 |
| 3003.0452 | | | 173 |
| 3006.2100 | | | 164 |
| 3006.2101 | | | 164 |
| 3006.2102 | | | 164 |
| 3006.2104 | | | 164 |
| 3006.2105 | | | 164 |
| 3006.2106 | | | 164 |
| 3006.2107 | | | 164 |
| 3006.2151 | | | 164 |
| 3006.2300 | | | 164 |
| 3006.2301 | | | 164 |

| Part number | Stock version | PU / Piece* | Page |
|-------------|---------------|-------------|------|
| 3006.2306 | | | 164 |
| 3230.0101 | | | 78 |
| 3230.0102 | | | 78 |
| 3230.0201 | | | 78 |
| 3230.0202 | | | 78 |
| 3230.0301 | | | 78 |
| 3230.0302 | | | 78 |
| 3230.0501 | | | 79 |
| 3230.0502 | | | 79 |
| 3230.0601 | | | 79 |
| 3230.0602 | | | 79 |
| 3230.0701 | | | 79 |
| 3230.0702 | | | 79 |
| 3230.1902 | | | 78 |
| 3250.0001 | | | 84 |
| 3250.0006 | | | 84 |
| 3250.0007 | | | 84 |
| 3250.0009 | | | 84 |
| 3250.0013 | | | 84 |
| 3250.0030 | | | 84 |
| 3250.0033 | | | 84 |
| 3250.0052 | | | 84 |
| 3250.0057 | | | 84 |
| 3250.0060 | | | 84 |
| 3250.0069 | | | 84 |
| 3250.0072 | | | 84 |
| 3250.0106 | | | 84 |
| 3250.0115 | | | 84 |
| 3250.0118 | | | 84 |
| 3250.0139 | | | 84 |
| 3250.0142 | | | 84 |
| 3250.0160 | | | 84 |
| 3250.0163 | | | 84 |
| 3250.0167 | | | 84 |
| 3250.0170 | | | 84 |
| 3250.0184 | | | 85 |
| 3250.0196 | | | 85 |
| 3250.0289 | | | 85 |
| 3250.0298 | | | 85 |
| 3250.0301 | | | 85 |
| 3250.0322 | | | 85 |
| 3250.0325 | | | 85 |
| 3250.0343 | | | 85 |
| 3250.0346 | | | 85 |
| 3250.0350 | | | 85 |
| 3250.0353 | | | 85 |
| 3250.0367 | | | 86 |
| 3250.0376 | | | 86 |
| 3250.0379 | | | 86 |
| 3250.0418 | | | 86 |
| 3250.0428 | | | 86 |
| 3250.0431 | | | 86 |
| 3250.0433 | | | 86 |
| 3250.0436 | | | 86 |
| 3250.0496 | | | 86 |
| 3250.0511 | | | 86 |
| 3250.0514 | | | 86 |
| 3250.0569 | | | 86 |
| 3250.0572 | | | 86 |
| 3250.0574 | | | 86 |
| 3250.0577 | | | 86 |
| 3250.0587 | | | 86 |
| 3250.0590 | | | 86 |

| Part number | Stock version | PU / Piece* | Page |
|-------------|---------------|-------------|------|
| 3250.0613 | | | 86 |
| 3250.0616 | | | 86 |
| 3250.0649 | | | 86 |
| 3251.0001 | | | 86 |
| 3251.0002 | | | 84 |
| 3251.0003 | | | 85 |
| 3251.0004 | | | 86 |
| 3251.0005 | | | 84 |
| 4021.0101 | • | 250 | 144 |
| 4021.0203 | | | 144 |
| 4021.0512 | • | 250 | 144 |
| 4021.0801 | • | 250 | 144 |
| 4021.1203 | | | 144 |
| 4021.4420 | • | 300 | 144 |
| 4021.4620 | • | 300 | 144 |
| 4021.4723 | • | 200 | 144 |
| 4021.4920 | • | 250 | 144 |
| 4024.0501 | | | 144 |
| 4024.4601 | | | 144 |
| 5000.0101 | • | 250 | 113 |
| 5000.0103 | • | 250 | 113 |
| 5000.0104 | • | 250 | 113 |
| 5000.0211 | • | 250 | 113 |
| 5000.0212 | | | 113 |
| 5000.0501 | • | 250 | 113 |
| 6425.0101 | • | 400 | 166 |
| 6425.1101 | • | 400 | 166 |
| 6425.3111 | • | 400 | 166 |
| 6425.3121 | | | 166 |
| 6425.3131 | • | 400 | 166 |
| 6425.4111 | • | 400 | 166 |
| 6425.4121 | • | 400 | 166 |
| 6425.4131 | • | 400 | 166 |
| 6425.5111 | • | 400 | 166 |
| 6425.5131 | • | 400 | 166 |
| 6425.6111 | | | 166 |
| 6425.6131 | | | 166 |
| 6450.0001 | • | 400 | 172 |
| 6450.0003 | • | 400 | 172 |
| 6450.0005 | • | 400 | 172 |
| 6450.0006 | • | 400 | 172 |
| 6450.0007 | | | 172 |
| 6450.0008 | | | 172 |
| 6450.0009 | | | 172 |

| Lamps | | | |
|-----------|---|-----|-----|
| 1667.0101 | | | 122 |
| 1667.0102 | | | 122 |
| 1677.5306 | | | 126 |
| 1677.5308 | | | 126 |
| 1806.1508 | | | 30 |
| 1807.1102 | • | 500 | 30 |
| 1807.1108 | • | 500 | 30 |
| 1807.1126 | | | 30 |
| 1807.6103 | | | 30 |
| 1837.1118 | | | 64 |
| 1837.3102 | | | 64 |
| 1837.8102 | | | 64 |
| 1837.8108 | | | 64 |
| 3237.0102 | | | 79 |
| 3237.0104 | | | 79 |
| 3237.0106 | | | 79 |
| 3237.0108 | | | 79 |

* Minimum packaging units



INDEX OF PART NUMBERS

ACCESSORIES

| Part number | Description | Page |
|-------------|--|----------|
| 190.059.013 | Parallel guide for double key caps, pitch 16 mm | 169 |
| 190.059.023 | Parallel guide for double/triple key caps, pitch 16/19 mm | 169 |
| 190.072.013 | Auxiliary actuators, L43: adjustable roller lever | 188, 196 |
| 190.074.013 | Auxiliary actuators, L45: adjustable simulated roller | 188, 196 |
| 190.075.013 | Auxiliary actuators, L41: adjustable plastic lever | 188, 196 |
| 190.372.041 | Auxiliary actuators, L32: simulated roller, mounted on NC side | 196 |
| 190.389.011 | Rocker without stop | 80 |
| 190.389.021 | Rocker with stop | 80 |
| 191.013.013 | Stainless spring steel | 208 |
| 191.071.011 | Auxiliary actuators, L01: straight lever | 188, 195 |
| 191.071.021 | Auxiliary actuators, L02: straight lever | 188, 195 |
| 191.071.021 | Auxiliary actuators, L02: straight lever, mounted on NC side | 195 |
| 191.071.041 | Auxiliary actuators, L21: simulated roller | 188, 195 |
| 191.071.051 | Auxiliary actuators, L22: simulated roller | 188, 195 |
| 191.071.051 | Auxiliary actuators, L22: simulated roller, mounted on NC side | 195 |
| 191.071.101 | Auxiliary actuators, L03: straight lever | 188, 195 |
| 191.078.013 | Auxiliary actuators, L11: roller lever | 188, 195 |
| 191.078.023 | Auxiliary actuators, L12: roller lever | 188, 195 |
| 191.078.023 | Auxiliary actuators, L12: roller lever, mounted on NC side | 195 |
| 191.079.013 | Auxiliary actuators, L11: roller lever | 200 |
| 191.079.023 | Auxiliary actuators, L12: roller lever | 200 |
| 191.080.091 | Auxiliary actuators, L01: straight lever | 200 |
| 191.080.101 | Auxiliary actuators, L02: straight lever | 200 |
| 191.080.451 | Auxiliary actuators, L21: simulated roller | 200 |
| 191.080.471 | Auxiliary actuators, L22: simulated roller | 200 |
| 191.081.011 | Auxiliary actuators, L31: differential lever | 182 |
| 191.081.031 | Auxiliary actuators, L21: simulated roller | 182 |
| 191.081.041 | Auxiliary actuators, L02: straight lever | 182 |
| 203.007.013 | Dummy piece | 35 |
| 203.007.023 | Dummy piece VO material | 35 |
| 203.020.013 | Dummy piece | 127 |
| 203.028.013 | Dummy piece | 123 |
| 203.069.013 | Dummy piece | 80 |
| 203.078.011 | Predetection cap | 69 |

| Part number | Description | Page |
|-------------|--|---------------------|
| 203.086.013 | Dummy piece | 35 |
| 203.089.011 | Predetection cap | 35, 37, 44, 47, 115 |
| 203.090.011 | Predetection cap | 35 |
| 203.103.013 | Dummy piece | 55 |
| 203.105.011 | Lever receptacle black | 138 |
| 203.105.016 | Cap design 1 - black, 1 light guide | 87 |
| 203.105.021 | Lever receptacle white | 138 |
| 203.105.026 | Cap design 1 - black, 2 light guide | 87 |
| 203.105.031 | Lever receptacle red | 138 |
| 203.105.036 | Cap design 1 - red, 1 light guide | 87 |
| 203.105.041 | Lever receptacle green | 138 |
| 203.105.046 | Cap design 1 - red, 2 light guide | 87 |
| 203.106.011 | Pushbutton | 119 |
| 203.106.016 | Cap design 1 - black, 1 light guide | 88 |
| 203.106.026 | Cap design 1 - black, 2 light guide | 88 |
| 203.106.036 | Cap design 1 - red, 1 light guide | 88 |
| 203.106.046 | Cap design 1 - red, 2 light guide | 88 |
| 203.107.016 | Cap design 1 - lock 1, bl.; no light. g. | 87 |
| 203.107.026 | Cap design 1 - lock 2, bl.; no light. g. | 87 |
| 203.107.036 | Cap design 1 - lock 3, bl.; no light. g. | 87 |
| 203.107.046 | Cap design 1 - lock 1, bl.; 1 light. g. | 87 |
| 203.107.056 | Cap design 1 - lock 2, bl.; 1 light. g. | 87 |
| 203.107.066 | Cap design 1 - lock 3, bl.; 1 light. g. | 87 |
| 203.107.076 | Cap design 1 - lock 1, red; no light. g. | 87 |
| 203.107.086 | Cap design 1 - lock 2, red; no light. g. | 87 |
| 203.107.096 | Cap design 1 - lock 3, red; no light. g. | 87 |
| 203.107.106 | Cap design 1 - lock 1, red; 1 light. g. | 87 |
| 203.107.116 | Cap design 1 - lock 2, red; 1 light. g. | 87 |
| 203.107.126 | Cap design 1 - lock 3, red; 1 light. g. | 87 |
| 203.108.016 | Cap design 1 - lock 1, bl.; no light. g. | 88 |
| 203.108.026 | Cap design 1 - lock 2, bl.; no light. g. | 88 |
| 203.108.036 | Cap design 1 - lock 3, bl.; no light. g. | 88 |
| 203.108.046 | Cap design 1 - lock 1, bl.; 1 light. g. | 88 |
| 203.108.056 | Cap design 1 - lock 2, bl.; 1 light. g. | 88 |
| 203.108.066 | Cap design 1 - lock 3, bl.; 1 light. g. | 88 |
| 203.108.076 | Cap design 1 - lock 1, red; no light. g. | 88 |

| Part number | Description | Page |
|-------------|--|---------------|
| 203.108.086 | Cap design 1 - lock 2, red; no light. g. | 88 |
| 203.108.096 | Cap design 1 - lock 3, red; no light. g. | 88 |
| 203.108.106 | Cap design 1 - lock 1, red; 1 light. g. | 88 |
| 203.108.116 | Cap design 1 - lock 2, red; 1 light. g. | 88 |
| 203.108.126 | Cap design 1 - lock 3, red; 1 light. g. | 88 |
| 203.145.051 | Dummy cap | 69 |
| 203.146.051 | Dummy cap | 69 |
| 203.201.011 | Protection cap | 68, 123 |
| 203.442.011 | Rocker with stop | 80 |
| 203.701.011 | Protection cap | 108 |
| 203.731.011 | Protection cap | 68 |
| 203.990.015 | Cap design 1 - black, no light guide | 87 |
| 203.990.045 | Cap design 1 - red, no light guide | 87 |
| 203.991.015 | Cap design 1 - black, no light guide | 88 |
| 203.991.045 | Cap design 1 - red, no light guide | 88 |
| 205.008.011 | Pushbutton | 119 |
| 207.122.011 | Protection cap | 41 |
| 217.xxx.xxx | Installation frame | 245 |
| 217.127.491 | Housing | 69 |
| 217.132.031 | Housing | 69 |
| 217.313.011 | Mounting frame black | 76 |
| 217.313.041 | Mounting frame anthracite metallic | 76 |
| 217.353.021 | Installation frame | 80 |
| 217.849.011 | Block connector | 81, 90 |
| 217.879.011 | Adapter frame | 89 |
| 217.887.011 | Assembly frame, can be stringed together; black (end piece) | 88 |
| 217.887.021 | Assembly frame, can be stringed together; black (center piece) | 88 |
| 217.954.011 | Block connector | 69, 74 |
| 231.005.021 | Insulating plate for solder terminal 0.5 mm | 186 |
| 231.009.011 | Insulating plate for solder terminal 0.5 mm | 208 |
| 231.010.011 | Insulating plate for solder terminal 0.5 mm | 208 |
| 231.010.021 | Insulating plate for solder terminal 0.8 mm | 208 |
| 237.036.011 | Dummy piece | 89 |
| 240.001.011 | Identification plate | 118, 137, 140 |
| 240.002.011 | Identification plate | 118, 138, 140 |
| 248.008.013 | Protection hood | 157 |
| 248.011.013 | Protection hood | 160 |
| 288.029.011 | Female connector | 81, 90 |
| 340.040.011 | Gasket | 123 |
| 343.001.013 | Protection cap green | 138 |
| 343.001.023 | Protection cap black | 138 |
| 343.001.033 | Protection cap red | 138 |
| 343.002.023 | Protection cap | 119 |
| 343.171.011 | Panel seal | 89 |
| 343.171.021 | Seal for adapter frame | 89 |
| 825.000.011 | Key cap, pitch 19 mm, square, without LED window, anthracite | 167 |

ROCKERSWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SWAMP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH IN DRIVE



INDEX OF PART NUMBERS

ACCESSORIES

| Part number | Description | Page |
|-------------|--|------|
| 826.000.011 | Key cap, pitch 16 mm, square, without LED window, anthracite | 167 |
| 826.000.021 | Key cap, pitch 16 mm, square, without LED window, dark grey | 167 |
| 826.000.071 | Key cap, pitch 16 mm, square, without LED window, red | 167 |
| 826.001.011 | Key cap, pitch 16 mm, square, anthracite white characters "1" | 170 |
| 826.002.011 | Key cap, pitch 16 mm, square, anthracite with white characters "2" | 170 |
| 826.003.011 | Key cap, pitch 16 mm, square, anthracite with white characters "3" | 170 |
| 826.004.011 | Key cap, pitch 16 mm, square, anthracite with white characters "4" | 170 |
| 826.005.011 | Key cap, pitch 16 mm, square, anthracite with white characters "5" | 170 |
| 826.006.011 | Key cap, pitch 16 mm, square, anthracite with white characters "6" | 170 |
| 826.007.011 | Key cap, pitch 16 mm, square, anthracite with white characters "7" | 170 |
| 826.008.011 | Key cap, pitch 16 mm, square, anthracite with white characters "8" | 170 |
| 826.009.011 | Key cap, pitch 16 mm, square, anthracite with white characters "9" | 170 |
| 826.010.011 | Key cap, pitch 16 mm, square, anthracite with white characters "0" | 170 |
| 826.017.011 | Key cap, pitch 16 mm, square, anthracite with white characters "+" | 170 |
| 826.018.011 | Key cap, pitch 16 mm, square, anthracite with white characters "-" | 170 |
| 826.022.011 | Key cap, pitch 16 mm, square, anthracite with white characters "" | 170 |
| 826.023.011 | Key cap, pitch 16 mm, square, anthracite with white characters "#" | 170 |
| 826.051.011 | Key cap, pitch 16 mm, square, anthracite with white characters "A" | 170 |
| 826.052.011 | Key cap, pitch 16 mm, square, anthracite with white characters "B" | 170 |
| 826.053.011 | Key cap, pitch 16 mm, square, anthracite with white characters "C" | 170 |
| 826.054.011 | Key cap, pitch 16 mm, square, anthracite with white characters "D" | 170 |

| Part number | Description | Page |
|-------------|--|------|
| 826.055.011 | Key cap, pitch 16 mm, square, anthracite with white characters "E" | 170 |
| 826.056.011 | Key cap, pitch 16 mm, square, anthracite with white characters "F" | 170 |
| 826.057.011 | Key cap, pitch 16 mm, square, anthracite with white characters "G" | 170 |
| 826.058.011 | Key cap, pitch 16 mm, square, anthracite with white characters "H" | 170 |
| 826.059.011 | Key cap, pitch 16 mm, square, anthracite with white characters "I" | 170 |
| 826.060.011 | Key cap, pitch 16 mm, square, anthracite with white characters "J" | 170 |
| 826.061.011 | Key cap, pitch 16 mm, square, anthracite with white characters "K" | 170 |
| 826.062.011 | Key cap, pitch 16 mm, square, anthracite with white characters "L" | 170 |
| 826.063.011 | Key cap, pitch 16 mm, square, anthracite with white characters "M" | 170 |
| 826.064.011 | Key cap, pitch 16 mm, square, anthracite with white characters "N" | 170 |
| 826.065.011 | Key cap, pitch 16 mm, square, anthracite with white characters "O" | 170 |
| 826.066.011 | Key cap, pitch 16 mm, square, anthracite with white characters "P" | 170 |
| 826.067.011 | Key cap, pitch 16 mm, square, anthracite with white characters "Q" | 170 |
| 826.068.011 | Key cap, pitch 16 mm, square, anthracite with white characters "R" | 170 |
| 826.069.011 | Key cap, pitch 16 mm, square, anthracite with white characters "S" | 170 |
| 826.070.011 | Key cap, pitch 16 mm, square, anthracite with white characters "T" | 170 |
| 826.071.011 | Key cap, pitch 16 mm, square, anthracite with white characters "U" | 170 |
| 826.072.011 | Key cap, pitch 16 mm, square, anthracite with white characters "V" | 170 |
| 826.073.011 | Key cap, pitch 16 mm, square, anthracite with white characters "W" | 170 |
| 826.074.011 | Key cap, pitch 16 mm, square, anthracite with white characters "X" | 170 |
| 826.075.011 | Key cap, pitch 16 mm, square, anthracite with white characters "Y" | 170 |

| Part number | Description | Page |
|-------------|--|------|
| 826.076.011 | Key cap, pitch 16 mm, square, anthracite with white characters "Z" | 170 |
| 826.170.011 | Key cap, pitch 16 mm, square, anthracite with white characters "←" | 170 |
| 827.020.011 | Key cap with oval actuation surface, design, pitch 16 mm, anthracite | 167 |
| 827.020.021 | Key cap with oval actuation surface, design, pitch 16 mm, dark grey | 167 |
| 827.100.011 | Key cap with round actuation surface, design, pitch ≥15 mm, anthracite | 168 |
| 827.100.021 | Key cap with round actuation surface, design, pitch ≥15 mm, dark grey | 168 |
| 827.100.031 | Key cap with round actuation surface, design, pitch ≥15 mm, grey | 168 |
| 828.000.011 | Key cap, pitch 19 mm, square, with LED window, anthracite | 167 |
| 828.000.021 | Key cap, pitch 19 mm, square, with LED window, dark grey | 167 |
| 829.000.011 | Key cap, pitch 16 mm, square, with LED window, anthracite | 167 |
| 829.000.021 | Key cap, pitch 16 mm, square, with LED window, dark grey | 167 |
| 834.900.013 | Key cap transparent, enclosed loose, pitch 19 mm, transparent/anthracite | 168 |
| 835.900.013 | Key cap transparent, enclosed loose, pitch 16 mm, transparent/anthracite | 168 |
| 840.000.011 | Key cap with ergonomic actuation surface, round, anthracite | 167 |
| 840.000.021 | Key cap with ergonomic actuation surface, round, dark grey | 167 |
| 840.000.071 | Key cap with ergonomic actuation surface, round, red | 167 |
| 842.000.011 | Key cap, double, pitch 16 mm, without LED window, anthracite | 168 |
| 842.000.021 | Key cap, double, pitch 16 mm, without LED window, dark grey | 168 |
| 842.500.011 | Key cap, double, pitch 16 mm, without LED window, anthracite | 168 |
| 843.000.011 | Key cap, triple, pitch 16 mm, anthracite | 169 |
| 844.000.011 | Key cap, double, pitch 19 mm, without LED window, anthracite | 168 |

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SWAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'DRIVE



INDEX OF PART NUMBERS

ACCESSORIES

| Part number | Description | Page |
|-------------|---|------|
| 844.500.011 | Key cap, double, pitch 19 mm, without LED window, dark grey | 168 |
| 845.000.011 | Key cap, triple, pitch 19 mm, anthracite | 169 |
| on request | Holder clamp | 245 |

| Part number | Description | Page |
|-------------|-------------|------|
|-------------|-------------|------|

| Part number | Description | Page |
|-------------|-------------|------|
|-------------|-------------|------|

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH 'N' DRIVE



AUSTRALIA / NEW ZEALAND

Cutter Electronics
www.cutter.com.au

AUSTRIA

Braun & Braun
www.braun-braun.at

BELARUS

FEK
www.fek.by

CANADA

siehe USA

CHINA

Beijing Eruiyu Electronics Co. Ltd.
www.eruiyu.com

Chengdu Ican Automatic Control Technology Co. Ltd.
www.icansensing.com

Le Champ (S.E.A.) Pte Ltd.
www.lechamp.com.sg

Shenzhen Beifang Electronics Co. Ltd.
www.szbeifang.com

Shanghai Yinshatai Industrial
www.yinshatai.com

Shanghai Zeiger Science & Technology Co. Ltd.
www.zeiger.com.cn

Wisdom Plus (M) SDN BHD
(Shenzhen Office)
(Shanghai Office)
(Beijing Office)
www.wisdomplus.com

CZECH REPUBLIC

FK Technics GmbH
www.fktechnics.cz

DENMARK

EG Electronics
www.egelectronics.com

Hans Folsgaard A/S
www.hf.dk

ESTONIA

Perel Eesti AS
www.perel.ee

FINLAND

Perel OY
www.perel.fi

FRANCE

Avnet Abacus
www.avnet-abacus.eu

Yelloz Components
www.yellozcomponents.com

GERMANY

BADER GmbH & Co. KG
www.bader.net

Bürklin OHG
www.buerklin.com

Conrad Electronic GmbH
www.conrad.biz

Distrelec Schuricht GmbH
www.distrelec.de

ETB Electronic Team
www.etb-electronic.de

EVE GmbH
www.eve.de

EVG Martens GmbH & Co. KG
www.evg.de

Farnell GmbH
www.farnell.com

J. Findler & Sohn Elektrotechn. GmbH
www.findlerusohn.de

J.W. Zander GmbH & Co.
www.zander-gruppe.de

Josef Traub GmbH
www.traub-gmbh.de

GERMANY

MÜTRON Müller GmbH & Co.
www.muutron.de

PR-Tronik Elektronik-Handels GmbH
www.pr-tronik.de

Reichelt Elektronik
www.reichelt.de

Repro Elektronik GmbH
www.repro-elektronik.de

RS Components GmbH
www.rs-online.com

Semtech GmbH
www.semtech.de

Unielektro GmbH & Co KG
www.unielektro.de

Werner GmbH
www.werner-electronic.de

GREAT BRITAIN

Nexus Components Ltd.
www.nexuscomponents.co.uk

HONG KONG

Group Tower Electronics
www.grouptower.com

HUNGARY

S.O.S. Electronic, Spol. S.R.O.
www.sos.sk

INDIA

Le Champ (S.E.A.) Pte Ltd.
www.lechamp.com.sg

ITALY

Avnet Abacus
www.avnet-abacus.eu

Newen SRL
www.newensrl.it

JAPAN

Correns Corporation
www.correns.co.jp

KOREA

SAEIL System Co.
e-mail saeilpark@dreamwiz.com

NETHERLAND

W. Geuken B.V.
www.geuken.nl

NORWAY

ELFA Elektronik AS
www.elfa.se

PAN EUROPEAN

Farnell GmbH
www.farnell.com

RS Components GmbH
www.rs-components.com

POLAND

Astat sp. z o.o.
www.astat.com.pl

Dacpol Co. Ltd.
www.dacpol.com.pl

PORTUGAL

Montenegro S.A.
www.jmontenegro.pt

RUMANIA

SOS Electronic Spol. S.R.O.
www.sos.sk

RUSSIA

MFC Fulcrum
www.fulcrum.ru

Perel Russia
www.perel-russia.ru

SINGAPORE / MALAYSIA / PHILIPPINES / THAILAND

Le Champ (S.E.A.) Pte Ltd.
(Singapur Office)
(Malaysia Offices)
(Philippines Office)
(Thailand Office)
(Vietnam Office)
(Indonesia Office)
www.lechamp.com.sg

V-Serve International Pte Ltd.
www.v-serve.com.sg

Wisdom Plus (M) SDN BHD
(Malaysia Offices)
(Bangkok Thailand Office)
www.wisdomplus.com

SLOVAKIA

S.O.S. Electronic, Spol. S.R.O.
www.sos.sk

SLOVENIA

INTERKONT Berger GmbH
www.interkont.si

SOUTH AFRICA

Avnet Kopp Pty. Ltd.
www.avnet.co.za

SOUTH AMERICA

Future Electronics
www.futureelectronics.com

Mouser Electronics, Inc.
www.mouser.com

SQB Schurter + OKW do Brasil
www.sob-brasil.com

SPAIN

Eurotronix S.A.
www.eurotronix.com

SWEDEN

EG Electronics AB
www.egelectronics.com

SWITZERLAND

Novitronic AG
www.novitronic.ch

Omni Ray AG
www.omniray.ch

TAIWAN

Chia Jun Co., Ltd.
www.chiajun.com.tw

TURKEY

Kapman Mümesillik
www.kapman.org

USA / CANADA

Beyond Components
www.beyondc.com

Future Electronics
www.futureelectronics.com

Genie Group
www.geniegroup.com

Hammond Electronics
www.hammondelec.com

Heilind Electronics, Inc.
www.heilind.com

Marsh Electronics, Inc.
www.marshelectronics.com


Masline Electronics, Inc.
www.masline.com

Mouser Electronics, Inc.
www.mouser.com

Spemco
www.spemco.com

Wes-Garde Components Group, Inc.
www.wesgarde.com

MARQUARDT INTERNATIONAL.

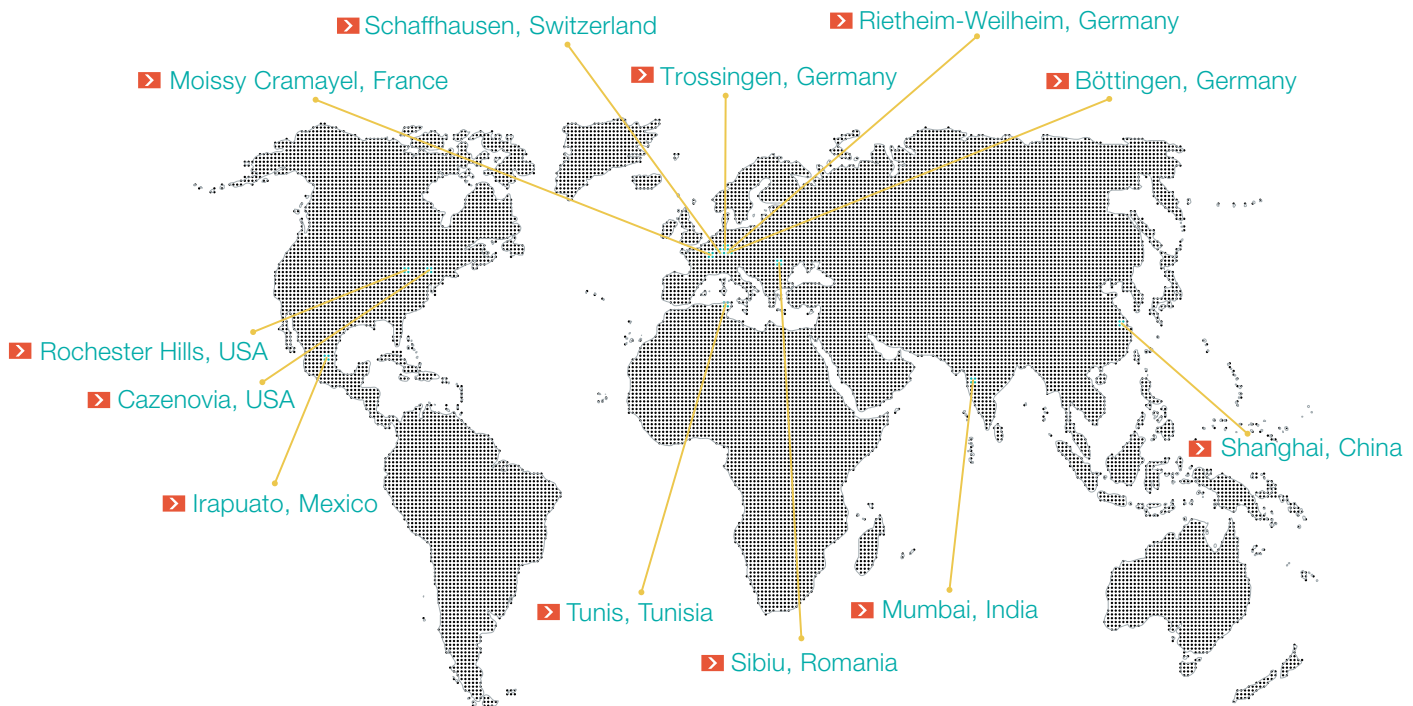

LOCATIONS SWITCHES, SENSORS & CONTROLS.

>>> GERMANY

Marquardt Mechatronik GmbH
Schloss-Straße 16
78604 Rietheim-Weilheim
Telefon +49 (0) 74 24/99-0
Telefax +49 (0) 74 24/99-2399
marquardt@marquardt.de
Vertrieb und Entwicklung

www.marquardt.com

>>> SWITZERLAND

Marquardt Verwaltungs-GmbH
Niederlassung Schaffhausen
Ernst-Müller-Straße 7
Postfach 952
CH-8201 Schaffhausen
Telefon +41 (0) 52/6443000
Telefax +41 (0) 52/6443060
marquardt@marquardt.ch
Vertrieb, Entwicklung und Produktion

>>> FRANCE

Marquardt France S.A.R.L.
520, avenue Blaise Pascal – Lot n° 5
77557 Moissy Cramayel Cedex
Telefon +33 (0) 1/64 13 60 70
Telefax +33 (0) 1/64 13 60 71
info@marquardt.fr
Vertrieb

>>> RUMANIA

Marquardt Schaltsysteme S.C.S.
Str. Munchen No. 2, 550018
Zona Industriala Vest
RO – Sibiu
Telefon +40 (0) 269 / 50-17 00
Telefax +40 (0) 269 / 50-17 06
info@marquardt.ro
Entwicklung und Produktion

>>> USA

Marquardt Switches Inc.
2711 Route 20 East
Cazenovia, N.Y. 13035-0465
Telefon +01 (0) 315/65580-50
Telefax +01 (0) 315/65580-42
info@marqswitch.com
Vertrieb, Entwicklung und Produktion

>>> MEXICO

Marquardt Mexico, S. DE R.L. DE
C.V.
Río Danubio No. 84
Parque Industrial Castro del Río
36810 Irapuato, Guanajuato
Produktion

>>> CHINA

Marquardt Switches
(Shanghai) Co., Ltd.
No. 650 Qingda Road
Heqing Industrial Zone
Shanghai (Pudong) 20 12 01
Telefon +86 (0) 21/5897-3302
Telefax +86 (0) 21/5897-2399
mscsh@marquardt.com.cn
Vertrieb, Entwicklung und Produktion

>>> TUNISIA

Marquardt Mécatronique Tunisie S.A.R.L.
104 Avenue de l'U.M.A.
2036 La Soukra, Tunis
Telefon +216 (0) 70 / 681-333
Telefax +216 (0) 70 / 682-110
info@marquardt-tn.com
Produktion

>>> INDIA

Marquardt India Pvt. Ltd.
21, Govt. Industrial Estate
Kandivali (West) – Mumbai 400 067
Telefon +91 (0) 22/286845 19
Telefax +91 (0) 22/286885 10
sales@marquardtindia.com
Vertrieb, Entwicklung und Produktion